



AC/DC Converter · DC/DC Converter · Enclosed · Transceiver Module · Isolation Amplifier

IGBT Driver · LED Driver · EMC Auxiliary Device · IC · Transformer



mornsun website

MORNSUN Power

No.5, Kehui St.1, Kehui Development Center, Science Ave.,
Guangzhou Science City, Huangpu District, Guangzhou

Tel: 020-38601850

Fax: 020-38601272

Email: info@mornsun.cn

www.mornsun-power.com

MORNSUN America,LLC

Add: PO Box 107 Maynard, MA 0175

Tel: +1(978)443 6719

Email: info@mornsun.cn

www.mornsunamerica.com

Mornsun Power GmbH

Add: Mayerbacher Straße 32, 85737 Ismaning, DE.

Tel: +49 (0) 89/693 350 20

Email: info@mornsunpower.de

www.mornsunpower.de

Product Catalogue 2020



Headquarter in Guangzhou

CONTENT

About MORNSUN.....	02-06
Part I Product Lists.....	07-21
Part II Recommended Selection of AC/DC Converter for Application Environment.....	22-28
Part III Recommended Selection of Product Line for Application Industry.....	29-36
Part IV Pin-Out Details.....	37
Part V Product Specification.....	38-182
1 AC/DC Enclosed	38-47
2 AC/DC Converter.....	48-81
3 DC/DC Converter.....	82-135
4 EMC Auxiliary Device.....	136-140
5 Industrial Bus Isolation Transceiver Module.....	142-149
6 Signal Conditioning Module	150-157
7 DC/DC Converter for IGBT Driver /IGBT Driver.....	158-161
8 LED Driver.....	162-163
9 Isolation Transmitter.....	164-166
10 IC.....	167-174
11 Transformer.....	175-182
Part VI Caution.....	183
Part VII Power Supply Testing.....	184-185
Part VIII Application Notes.....	186-199

MORNSUN® MORNSUN, a national high-tech enterprise headquartered in China, has grown into a leading vertical industrial power supply manufacturer.

Keeping the spirit of being forerunner, MORNSUN specializes in magnetic isolation technology and product research and application, and manufactures high-quality products include AC/DC converter, DC/DC converter, enclosed switching power supply, adapter, isolation transmitter, IGBT driver, LED driver, IC and transformer, etc. most of which got UL, CE, CSA, CB and DoE Level VI certification.

As an IPR Demonstration Enterprises in Guangdong, MORNSUN is one of few power supply manufactures that has its own independent Intellectual Property Rights of integrated circuit, innovative transformer structure, assembly system and appearance design. Over the past 22 years, MORNSUN applied 900+ patents for inventions.

Guided by the service principle of "trust worthy", MORNSUN established its subsidiaries in America and Germany, expanded its distribution network in 40+ countries and operated sample inventory in Germany, North America, India, Japan and others to offer the best service to local clients in those locations.

As part of society, MORNSUN focuses on teamwork and persistent hard work, and it's deeply devoted to her role as a responsible corporate citizen around the world. Based on it, MORNSUN holds the core value of "creating value for her employees, clients, shareholders and developing our business to repay the society" and takes it as her mission to make contribution to the development of society and progress of the humankind by pursuing excellence unremittingly.



R&D Center in Guangzhou



Manufacturing Center in Huaihua

Milestones

- 2019----Awarded "TOP 100 Innovative Enterprise in Guangdong 2018"
- 2018----Awarded World Electronics Achievement 2018
- 2018----Awarded "TOP 500 Manufacturing enterprise in Guangdong Province" for 3 years in a row(2016-2017)
- 2017----Awarded "TOP 10 Power Supply Product" for 7 years in a row (2012-2017)
- 2017----Awarded Sci-Tech Awards by CHINA POWER SUPPLY SOCIETY for 3 times in a row (2013-2017, biennial event)
- 2017----Awarded "Guangdong Outstanding Export Enterprise 2017"
- 2017----Awarded "Intellectual Property Mayor award in Guangzhou"
- 2017----Established MORNSUN Power GmbH in Germany
- 2017----Awarded "IPR Demonstration Enterprises in Guangdong 2017"
- 2017----Acquired "Guangdong Provincial Enterprise Technology Center" approval
- 2017----High frequency switching DC power source awarded "Well-Known Product" in Guangdong (2014、2017)
- 2017----Awarded "Guangdong Golden Award of Patent"
- 2016----Completed the certification of GB/T29490-2013 Enterprise IPR Management
- 2016----Awarded "To 20 Enterprise of Patent Creating in Development Zone" for 5 years in a row (2012-2016)
- 2015----Awarded "Guangdong Engineering Technology Research Center of Industrial Power Supply Module "
- 2015----Awarded "Well-Known Trademark" in Guangdong
- 2014----Purchased MORNSUN Guangzhou R&D center building
- 2013----Drafted Fixed voltage input and Unregulated output isolated DC-DC model power supply, standard number (pending): Energy 20130817
- 2012----Drafted Wide voltage input and regulated output isolated DC-DC model power supply, standard number NB/T 42039-2014, which goes into effect from Nov. 1 2014
- 2012----Ranked the top 18th of 100 most potential private companies by Forbes China
- 2012----Awarded "Most Satisfactory Employer of China 2012" under the Hi-Tech category
- 2011----Established MORNSUN Huaihua manufacturing center
- 2010----Moved to MORNSUN new headquarter building in Guangzhou Science City
- 2008----Established MORNSUN America, LLC in MA, USA
- 2003----Awarded "High-tech Enterprise"
- 2001----Implemented informational management system
- 1998.07----Established MORNSUN in Guangzhou, China

One-stop solutions of power supplies

► Professional Technology & International Standard

- 900+ patents and IPRs: power circuit topology, transformer structures, assembling technology and etc;
- Drafted the standard *NB/T 42039-2014* and *Energy 20130817*;
- International standard pin-out and SMD package with convenient design and automatic manufacturing process.

► 360° Professional Support

- Professional selection guide : 'Choose the product that works';
- Precise trading: Nearly 100% OTD and door-to-door delivery which reduce customers' cost and risks;
- 360° professional support: Fast response within 48hrs, routine visit, technical communication and discussion.

► Reliability Ensured Throughout The Whole Manufacturing Process

- Seven platforms ensuring the reliability and controllability for the whole process from R&D, manufacturing to marketing;
- Seven platforms: Technology management platform, Material management platform, Failure analysis platform, Manufacturing platform, Process control platform, Personnel training platform, Service platform.

Notes:

NB/T 42093-2014: Wide voltage input and regulated output isolated DC-DC model power supply
Energy 20130817: Fixed voltage input and unregulated output isolated DC-DC model power supply





Automatic SMT clean room



Automatic workshop



Certifications



Systems

IATF16949 ISO9001 ISO14001 OHSAS18001

Key to the Reliability

Power supply is the heart of industrial equipment. What customers concern most is not the price, the function or the efficiency, but the reliability of the power supply. In other words, it must not break down especially in various extreme situations.

It is easy to guarantee the function of the power supply, but not for the reliability, particularly the reliability of the power supply under harsh conditions. The reliability can only be achieved by a perfect management system which consists of advanced research technology, high-quality raw material platform, advanced equipment, excellent manufacturing process management, specialized screening sequence on reliability and rich experience.


Meanwhile, the reliability of products depends on not only design and manufacturing but also customers' proper operation. Therefore, MORNSUN FAE team are ready to offer professional technical support to customers to enhance the reliability.

Therefore, improving the reliability of the products is not a simple task but a rather complex system.


To meet customers demand and expectation, MORNSUN spends much time and money to improve the power supply reliability. In 2007, MORNSUN established the power supply reliability system project and brought in 7 platforms to improve the reliability of MORNSUN products in the following 12 years, including Technology management platform, Material management platform, Failure analysis platform, Manufacturing platform, Process control platform, Personnel training platform, Service platform.. Thanks to these platforms, MORNSUN makes significant breakthroughs in all existing products and develops R3 DC-DC Converter with higher reliability and upgraded performance.

"No pain, no gain." The reliability can only be achieved by earnest, meticulous work, step by step, which is consistent with MORNSUN's Camel Culture. In conclusion, MORNSUN's meticulous and systemic work makes products reliable .

MORNSUN'S TQA System Architecture

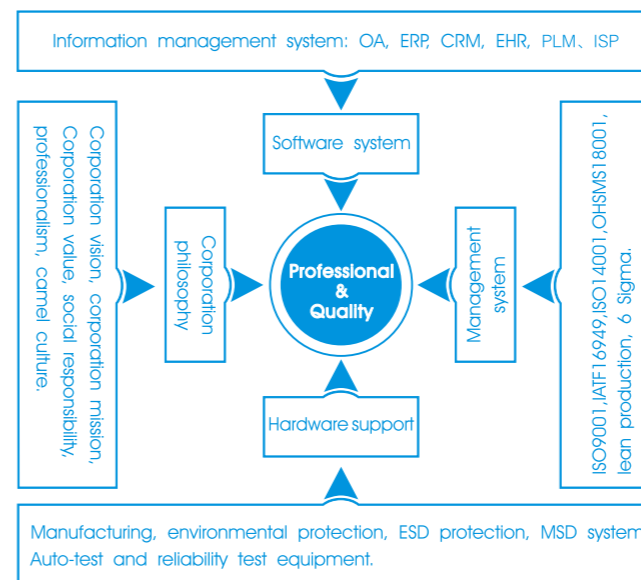

Reliability Assurance

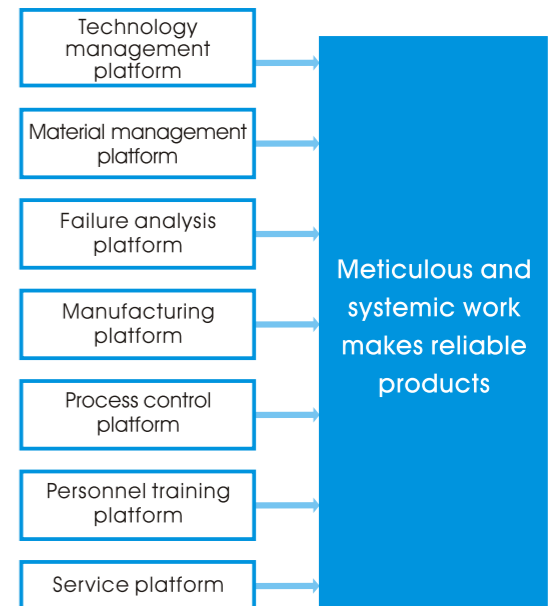

35-350W AC/DC enclosed

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LM35-20B	35W	85-264VAC/120-373VDC	5,12,15,24	RoHS CE CCC	Industrial Indoor/Outdoor Environment	39
LM35-22B	35W	165-264VAC/180-373VDC	5,12,15,24	RoHS CE CCC	Industrial Indoor/Outdoor Environment	39
LM35-10C	35W	85-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	RoHS CE	Industrial Indoor/Outdoor Environment	39
LM35-10D	35W	85-264VAC/120-373VDC	+5/+12,+5/+24	RoHS eFUS CE	Industrial Indoor/Outdoor Environment	39
LM50-20B	50W	85-264VAC/120-373VDC	5,12,15,24	RoHS CE CCC	Industrial Indoor/Outdoor Environment	39
LM50-22B	50W	165-264VAC/180-373VDC	5,12,15,24	RoHS CE CCC	Industrial Indoor/Outdoor Environment	39
LM50-10C	50W	85-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	RoHS CE	Industrial Indoor/Outdoor Environment	39
LM50-10D	50W	85-264VAC/120-373VDC	+5/+12,+5/+24	RoHS CE	Industrial Indoor/Outdoor Environment	39
LM75-20B	75W	85-264VAC/120-373VDC	5,12,15,24,48	RoHS CE CCC	Industrial Indoor/Outdoor Environment	40
LM75-22B	75W	165-264VAC/200-373VDC	5,12,15,24,48	RoHS CE CCC	Industrial Indoor/Outdoor Environment	40
LM75-10C	75W	90-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	RoHS CE	Industrial Indoor/Outdoor Environment	40
LM75-10D	75W	90-264VAC/120-373VDC	+5/+12,+5/+24	RoHS eFUS CE	Industrial Indoor/Outdoor Environment	40
LM100-20B	100W	85-264VAC/120-373VDC	5,12,15,24,36,48	RoHS CE CCC	Industrial Indoor/Outdoor Environment	42
LM100-22B	100W	165-264VAC/200-373VDC	5,12,15,24,36,48	RoHS CE CCC	Industrial Indoor/Outdoor Environment	42
LM100-10C	100W	90-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	RoHS CE	Industrial Indoor/Outdoor Environment	42
LM100-10D	100W	90-264VAC/120-373VDC	+5/+24,+12/+24	RoHS CE	Industrial Indoor/Outdoor Environment	42
LM150-20B	150W	85-264VAC/120-373VDC	12,15,24,36,48	RoHS CE CCC	Industrial Indoor/Outdoor Environment	43
LM150-22B	150W	165-264VAC/180-373VDC	12,15,24,36,48	RoHS CE CCC	Industrial Indoor/Outdoor Environment	43
LM200-10B	200W	90-132VAC/180-264VAC	5,12,15,24,36,48	RoHS CE CEC	Industrial Indoor/Outdoor Environment	44
LM200-12B	200W	176-264VAC/240-373VDC	5,12,15,24,36,48	RoHS CE CEC	Industrial Indoor/Outdoor Environment	44
LM350-10B	350W	90-132VAC/180-264VAC	5,12,15,24,36,48	RoHS CE CEC	Industrial Indoor/Outdoor Environment	45
LM350-12B	350W	176-264VAC/240-373VDC	5,12,15,24,36,48	RoHS CE CEC	Industrial Indoor/Outdoor Environment	45
LMF75-20B (With PFC)	75W	85-264VAC/120-370VDC	5,12,15,24,48	RoHS CE CCC (pending)	Industrial Indoor/Outdoor Environment	46
LMF100-20B (With PFC)	100W	85-264VAC/120-373VDC	5,12,15,24,48	RoHS CE CCC (pending)	Industrial Indoor/Outdoor Environment	46
LMF150-20B (With PFC)	150W	85-264VAC/120-373VDC	5,12,15,24,48	RoHS CE CCC (pending)	Industrial Indoor/Outdoor Environment	46
LMF200-20B (With PFC)	200W	85-264VAC/120-373VDC	5,12,15,24,48	RoHS CE CCC (pending)	Industrial Indoor/Outdoor Environment	46
LMF320-20B (With PFC)	320W	85-264VAC/120-373VDC	5,12,15,24,48	RoHS CE CCC (pending)	Industrial Indoor/Outdoor Environment	46

30-100W ladder-shaped AC/DC DIN-Rail power supply

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LI30-20BxxPR2	30W	85-264VAC/120-370VDC	5,12,15,24,48	RoHS CE	Industrial Indoor Environment	74
LI60-20BxxPR2	60W	85-264VAC/120-370VDC	5,12,15,24,48	RoHS CE	Industrial Indoor Environment	74
LI100-20BxxPR2	100W	85-264VAC/120-370VDC	12,15,24,48	RoHS CE	Industrial Indoor Environment	74

75-120W DIN35 package AC/DC DIN-Rail power supply

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LI75-20BxxR2	75W	90-264VAC/120-373VDC	12,24,48	RoHS CE (pending)	Industrial Outdoor Environment	75
LI120-20BxxR2	120W	90-264VAC/127-370VDC	12,24,48	RoHS CE (pending)	Industrial Outdoor Environment	75
LI120-13B	120W	85-305VAC/100-430VDC	12,24	RoHS	Industrial Outdoor Environment	75

• This catalog is used to introduce our latest products, for more information, please contact our sales department

80-150W AC/DC LI series specialized for marine engineering device

Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Current (A)	Certification	Application Environment	Page
LI80-13C2412-10-ZX	77W	85-305VAC/100-430VDC	24/12/5	2.5/1.0/1.0	RoHS	Industrial Outdoor Ocean Environment	77
LI120-10B24-ZX	120W	85-264VAC/100-370VDC	24	5	RoHS	Industrial Outdoor Ocean Environment	77
LI150-13B29	150W	85-305VAC/100-430VDC	29	5.2	RoHS	Industrial Outdoor Ocean Environment	77

Parallel redundancy power supply

Series	Input Voltage Range (Vin)	Output Voltage (Vo/typ)	Output Current (Io)	Certification	Application Environment	Page
LIR-20	22-60VDC	Vin-0.65V	20A	RoHS CE (pending)	Industrial Outdoor Environment	76

1-10W DIY type AC/DC converter LS series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS eFUS CE CB	Commercial Indoor Environment	49
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS eFUS CE CB	Commercial Indoor Environment	49
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS eFUS CE CB	Industrial Indoor Environment	51
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE	Industrial Indoor Environment	51
LS05-13BxxSR2S(-F)	5W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS eFUS CE CB	Commercial Indoor Environment	49
LS08-13BxxSS(-F)	8W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS eFUS CE CB	Commercial Indoor Environment	49
LS10-13BxxSS(-F)	10W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS eFUS CE CB	Commercial Indoor Environment	49

1-3W non-isolated AC/DC converter LS-K3B series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LS01-K3B05SS	1W	85-305VAC/70-430VDC	5	RoHS CE	Commercial Indoor Environment	50
LS03-K3B12SS	3W	85-305VAC/70-430VDC	12	RoHS CE	Commercial Indoor Environment	50

Ultra-wide input voltage non-isolated AC/DC single firewire power supply LSF series

Series	Power	Input Voltage Range	Output Voltage Vo(VDC)	Output Voltage V01 (VDC)	Certification	Application Environment	Page
LSF01-K5B12SS	1W	15-380VDC	12.5	5	RoHS	Industrial Indoor/Outdoor Environment	50

45-528VAC ultra-wide input voltage AC/DC core board scheme LSC series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LSC15-26M05	15W	45-528VAC/65-745VDC	V01: 5 V01/V02: 5/5,5/24 V01/V02/V03: 5/±5.5/±12.5/±15	RoHS	Industrial Indoor/Outdoor Environment	52
LSC15-26M09	15W	45-528VAC/65-745VDC	9	RoHS	Industrial Indoor/Outdoor Environment	52
LSC15-26M12	15W	45-528VAC/65-745VDC	12	RoHS	Industrial Indoor/Outdoor Environment	52
LSC15-26M15	15W	45-528VAC/65-745VDC	15	RoHS	Industrial Indoor/Outdoor Environment	52
LSC15-26M24	15W	45-528VAC/65-745VDC	24	RoHS	Industrial Indoor/Outdoor Environment	52

85-264VAC Input Voltage AC/DC Core Board Scheme LSC Series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LSC20-20M03	11.55W	85-264VAC/100-370VDC	3.3	RoHS	Industrial Indoor/Outdoor Environment	53
LSC20-20M05	15.5W	85-264VAC/100-370VDC	5	RoHS	Industrial Indoor/Outdoor Environment	53
LSC20-20M09	20W	85-264VAC/100-370VDC	9	RoHS	Industrial Indoor/Outdoor Environment	53
LSC20-20M12	20W	85-264VAC/100-370VDC	12	RoHS	Industrial Indoor/Outdoor Environment	53
LSC20-20M15	20W	85-264VAC/100-370VDC	15	RoHS	Industrial Indoor/Outdoor Environment	53
LSC20-20M24	20W	85-264VAC/100-370VDC	24	RoHS	Industrial Indoor/Outdoor Environment	53

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

AC/DC Converter Selection Guide

1-10W compact 85-305VAC wide input voltage AC/DC converter LD/LDE series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LD01-10B	1W	85-305VAC/120-430VDC	3.3,5,9,12,15,24	RoHS CE	Industrial Indoor Environment	56
LDE02-23B	2W	85-305VAC/120-430VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	56
LDE05-23B	5W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	56
LDE10-23B	10W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	56

3W AC/DC converter LDE-O series (transient over-power up to 12W)

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LDE03-20B-0	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE (pending)	Industrial Indoor Environment	55

3-60W compact size 85-264VAC input voltage AC/DC converter LD/LDE series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LDE03-20B	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE03-20B-W	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LD03-20B-C	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE05-20B-W	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LD05-20B-C	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE06-20B	6W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	57
LDE45-20B	45W	85-264VAC/100-370VDC	5,12,15,24,48	RoHS CE	Industrial Indoor Environment	57
LDE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	RoHS CE	Industrial Indoor Environment	57

3-20W 90-528VAC ultra-wide input voltage AC/DC converter LD series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LD03-16B	3W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Indoor Environment	54
LD10-26B	10W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS CE	Industrial Indoor Environment	54
LD20-26B	20W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS CE	Industrial Indoor Environment	54

3W AC/DC converter LD-WG series specialized for white goods

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LD03-20BxxWG	3W	85-264VAC/120-373VDC	5,12,24	RoHS CE	Commercial Indoor Environment	55

5-60W 85-305VAC wide input voltage standard package AC/DC converter LH/LHE series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LH05-13B	5W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Outdoor Environment	59
LHE10-23B	10W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE	Industrial Outdoor Environment	59
LHE15-23B	15W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	RoHS CE CB	Industrial Outdoor Environment	59
LH20-13B	20W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE CB	Industrial Outdoor Environment	59
LHE25-23B	25W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	RoHS CE CB	Industrial Outdoor Environment	59
LHE40-23B	40W	85-305VAC/100-430VDC	3.3,5,12,15,24,48	RoHS CE	Industrial Outdoor Environment	59
LHE60-23B	60W	85-305VAC/100-430VDC	5,12,15,24,48	RoHS CE	Industrial Outdoor Environment	59

• This catalog is used to introduce our latest products, for more information, please contact our sales department

AC/DC Converter Selection Guide

5-60W standard packaged 85-264VAC input voltage AC/DC Converter LH/LHE series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Voltage (VDC)	Certification	Application Environment	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS CE CB	Industrial Outdoor Harsh Environment	61
LHE05-20A	5W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	Industrial Outdoor Harsh Environment	61
LHE05-20C	5W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	Industrial Outdoor Harsh Environment	61
LHE05-20D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	Industrial Outdoor Harsh Environment	61
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS CE CB	Industrial Outdoor Harsh Environment	61
LHE10-20A	10W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	Industrial Outdoor Harsh Environment	61
LHE10-20C	10W	85-264VAC/100-370VDC	5	±12,±15	RoHS	Industrial Outdoor Harsh Environment	61
LHE10-20D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	Industrial Outdoor Harsh Environment	61
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS CE CB	Industrial Outdoor Harsh Environment	61
LHE15-20A	15W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	Industrial Outdoor Harsh Environment	61
LHE15-20C	15W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	Industrial Outdoor Harsh Environment	61
LHE15-20D	15W	85-264VAC/100-370VDC	5	5,12,24	RoHS	Industrial Outdoor Harsh Environment	61
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS CE CB	Industrial Outdoor Harsh Environment	61
LHE20-20A	20W	85-264VAC/100-370VDC	+12,+15	-12,-15	RoHS	Industrial Outdoor Harsh Environment	61
LHE20-20C	20W	85-264VAC/100-370VDC	5	±12,±15	RoHS	Industrial Outdoor Harsh Environment	61
LHE20-20D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS	Industrial Outdoor Harsh Environment	61
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS CE CB	Industrial Outdoor Harsh Environment	61
LHE40-20B	40W	85-264VAC/100-370VDC	3.3,5,12,15,24,48	/	RoHS CE	Industrial Outdoor Environment	62
LHE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	/	RoHS CE	Industrial Outdoor Environment	62
LH60-20B-DT	60W	55-264VAC/77-370VDC	5,9,12,24	/	RoHS CE CB	Industrial Outdoor Environment	62

3-65W cost-effective open frame AC/DC converter LO series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
LO03-10B	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS	Commercial Indoor Environment	67
LO05-12B	5W	165-264VAC/230-370VDC	3.3,5,9,12,15,24	RoHS	Commercial Indoor Environment	67
LO15-10B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	Commercial Indoor Environment	67
LO30-10B	30W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	RoHS CE CB	Commercial Indoor Environment	67
LO45-10B	45W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	RoHS CE CB	Commercial Indoor Environment	67
LO65-10B	65W	85-264VAC/100-370VDC	5,9,12,15,24,48	RoHS CE CB	Commercial Indoor Environment	67

5-25W AC/DC converter specialized for medical

Series	Power	Input Voltage Range	Output Voltage (Vo1)	Certification	Page
LD05-20BxxMU	5W	85-264VAC/100-370VDC	5,12,15,24	RoHS CE	65
LD08-20BY4-US	7.6W	85-264VAC/100-370VDC	3.8	RoHS CE	65
LH15-20BxxMU	15W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS CE CB	66
LH25-20BxxMU	25W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS CE CB	66

10W AC/DC converter LO series specialized for flow-meter (customization is available)

Series	Power	Input Voltage Range	Output Available (Vo1/Vo2/Vo3)	Output Available (Vo4/Vo5)	Output Available (Vo6/Vo7)	Certification	Page
LO10-10J	10W	85-264VAC/120-370VDC	Triple outputs available (3.3V-24V)	Positive and negative voltage available (±5V to ±24V)	Positive and negative voltage available (±5V to ±70V)	RoHS	69

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

AC/DC Converter Selection Guide

10-30W AC/DC converter specialized for electric power

Series	Power	Input Voltage Range	Output Voltage (VDC)	EMI	Certification	Page
LO10-24B	6.6W	30-280VAC/30-400VDC	5,12,13	Class B	RoHS	69
LO10-26D0512-04L	10.92W	57-528VAC/80-745VDC	5.1/12	Class B	RoHS	70
LO15-26D1212-03	13.2W	57-528VAC/80-745VDC	12/12	Class B	RoHS	70
LO15-26D1305-03	15W	57-528VAC/80-745VDC	13.5/5	Class A	RoHS	70
LO20-10C0512-01	18.7W	165-264VAC/230-370VDC	5, ±12	Class A	RoHS	70
LO30-10C0512-12	31.2W	85-264VAC/100-370VDC	5, ±12	Class A	RoHS	70
LH10-10BxxER2	10W	85-264VAC/100-370VDC	5,12,24	Class A/Class B	RoHS	71
LHE10-20DxxER2	10W	85-264VAC/100-370VDC	5/12,5/24	Class A/Class B	RoHS	71
LH15-10BxxER2	15W	85-264VAC/100-370VDC	5,12,24	Class A/Class B	RoHS	71
LH15-10DxxER2	15W	85-264VAC/100-370VDC	5/12,5/24	Class A/Class B	RoHS	71
LH25-10BxxER2	25W	85-264VAC/100-370VDC	5,12,15,24	Class A/Class B	RoHS, CE CB	71
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5/±12/24	Class B/Class B	RoHS	65

300W 165-264VAC input AC/DC battery charging module power supply

Series	Long term power	Instantaneous power	Input Voltage Range	Load voltage /current	Float voltage /charge current	Certification	Application Environment	Page
MBP300-2A27D27M	40.5W	270W/15s,432W/1s	165-264VAC	27V/1A	27V/0.5A	RoHS	Industrial Outdoor Environment	72

Bus power supply for smart building

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
KNX20-22A640	20W	180-264VAC/254-370VDC	30	RoHS KNX(pending)	Commercial Indoor Environment	73

40-120W ultra-wide, ultra-high input voltage PVA series specialized for mining industry

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Application Environment	Page
PVA40-26B	40W	460-1500VAC	12,28,35	RoHS	Industrial Outdoor Harsh Environment	81
PVA40-27B	40W	85-900VAC	18,24,30	RoHS	Industrial Outdoor Harsh Environment	79
PVA70-27B	70W	85-900VAC	24,28,35	RoHS	Industrial Outdoor Harsh Environment	79
PVA120-27B	120W	85-900VAC	28,35	RoHS	Industrial Outdoor Harsh Environment	79
PVA120-27B-C	120W	85-900VAC	35	RoHS	Industrial Outdoor Harsh Environment	79

DC/DC Converter Selection Guide

1-3W fixed input voltage, isolated & unregulated output DC/DC converter

Series	Power	Input Voltage (VDC)	Output Voltage (VDC)	Certification	Applications	Page
B_S-W2R2	0.25W	3.3,5,12,15,24	3.3,5,9,12	RoHS, CE CB	universal	94
B_XT-W2R2	0.25W	3.3,5,12,24	3.3,5,9,12,15	RoHS, CE	universal	96
F_XT-W2R2/F_XT-W2R3	0.25W	5,12	5	RoHS, CE	universal	99
CF0505XT-1WR3	1W	5	5	RoHS, CE	automotive	89
CFB0505XT-1WR3	1W	5	5	RoHS, CE	automotive	89
FB0505XT-1WR3	1W	5	5	RoHS	universal	96
B05_LD-1WR2/R3	1W	5	5,50,60	RoHS	universal	91
G_S-1WR2	1W	5,12,15,24	±5, ±9, ±12, ±15	RoHS, CE CB	medical	92
H_S-1WR2	1W	3.3,5,12,15,24	3.3,5,12,15	RoHS, CE CB	medical	92
B_RN-1WR2	1W	5	5	RoHS	universal	93
B_RT-1WR2	1W	5	5	RoHS	universal	93
A_S-1WR2/A_S-1WR3	1W	3.3,5,9,12,15,24	±3.3, ±5, ±9, ±12, ±15	RoHS, CE CB	universal	94
B_S-1WR2/B_S-1WR3	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS, CE	universal	94
B_LS-1WR2/B_LS-1WR3	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS, CE CB	universal	94
E_S-1WR2/E_S-1WR3	1W	3.3,5,9,12,15,24	±3, ±5, ±9, ±12, ±15, ±24	RoHS, CE CB	universal	95
F_S-1WR2/F_S-1WR3	1W	3.3,5,9,12,15,24	3.3,5,9,12,15,24	RoHS, CE CB	universal	95
A_XT-1WR2/A_XT-1WR3	1W	3.3,5,12,15,24	±5, ±9, ±12, ±15, ±24	RoHS, CE CB	universal	96
B_XT-1WR2/B_XT-1WR3	1W	3.3,5,12,15,24	3.3,5,6,9,12,15,24	RoHS, CE	universal	96
E_XT-1WR2/E_XT-1WR3	1W	3.3,5,12,15,24	±5, ±9, ±12, ±15, ±24	RoHS, CE CB	universal	96
F_XT-1WR2/F_XT-1WR3	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS, CE CB	universal	96
A_D-1WR2	1W	5,12,15,24	±5, ±9, ±12, ±15, ±24	RoHS	universal	97
B_D-1WR2	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS, CE CB	universal	97
E_D-1WR2/E_D-1WR3	1W	5,12,24	±5, ±9, ±12, ±15	RoHS, CE	universal	97
F_D-1WR2	1W	3.3,5,12,15,24	3.3,5,12,15	RoHS, CE	universal	97
F_N-1WR3	1W	5	3.3,5,9,12,15,24	RoHS, CE	universal	97
G_S-2WR2	2W	5,12,15,24	±5, ±9, ±12, ±15	RoHS, CE	medical	92
H_S-2WR2	2W	5,12,15,24	5,12,15	RoHS, CE	medical	92
A_S-2WR2	2W	5,12,15,24	±3.3, ±5, ±9, ±12, ±15	RoHS, CE	universal	98
B_S-2WR2	2W	5,12,15,24	3.3,5,9,12,15,24	RoHS, CE	universal	98
E_S-2WR2	2W	5,12,15,24	±3.3, ±5, ±9, ±12, ±15, ±24	RoHS, CE CB	universal	98
F_S-2WR2	2W	5,12,15,24	3.3,5,9,12,15,24	RoHS, CE CB	universal	98
B_XT-2WR2	2W	5,12,15,24	3.3,5,9,12,15,24	RoHS, CE	universal	100
F_XT-2WR2	2W	5,12,15,24	5,9,12,15,24	RoHS, CE	universal	100
A_D-2WR2	2W	5,12,15,24	±5, ±9, ±12, ±15	RoHS, CE CB	universal	100
B_D-2WR2	2W	3.3,5,9,12,24	3.3,5,9,12,15,24	RoHS, CE CB	universal	100
E_D-2WR2	2W	5,12,15,24	±5, ±9, ±12, ±15, ±24	RoHS, CE CB	universal	100
F_D-2WR2	2W	5,12,15,24	5,9,12,15,24	RoHS, CE CB	universal	100
B_S-3WR2	3W	5,12	5,9,12	RoHS	universal	98
F_S-3WR2	3W	5,12,15	5,9,12,15	RoHS	universal	98

HK series specialized for intelligent instrument

Series	Input Voltage (VDC)	Input Current (mA)	Output Voltage (VDC)	Output Current (mA)	Certification	Applications	Page
HK5S_B	5	4-20	3.3,5	2,3,2	RoHS	Intelligent Instrument	90
HK8S_B	7.5	4-20	3,3.3,5	3,5,5	RoHS	Intelligent Instrument	90
HK_S	5/7-8	3.5-20	3.3	2,2.5,3,5	RoHS	Intelligent Instrument	90

0.75-2W fixed input voltage, isolated & regulated output DC/DC converter

Series	Power	Input Voltage (VDC)	Output Voltage (VDC)	Certification	Applications	Page
IB_LS-1W/IB_LS-1WR3	1W	5,12,15,24	3.3,5,9,12,15,24	RoHS CE CB	universal	101
IB_XT-1WR2	1W	5,12,24	3.3,5,12,15	RoHS CE	universal	101
IF_XT-1WR2/IF_XT-1WR3	1W	5,12,24	3.3,5,9,12,15	RoHS CE	universal	101
IF_S-1W/IF_S-1WR3	1W	5,12,24	3.3,5,9,12,15,24	RoHS CE CB	universal	101
IE_KS-1WR3	1W	5	±5, ±9, ±12, ±15	RoHS CE	universal	101
IB_S-2W	2W	5,12,15,24	5,12,15	RoHS CE	universal	101
IF_S-2W	2W	5,12,24	5	RoHS CE	universal	101
IB_S-W75R3	0.75W	5	3.3,5,9,12,15	RoHS CE	universal	101
IB_XT-W75R3	0.75W	5	3.3,5,9,12,15	RoHS CE	universal	101

2:1 wide input voltage, isolated & regulated output DC/DC converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
WRA_SD/T-1WR2	1W	9-18,18-36	±5, ±12, ±15, ±24	RoHS	universal	106
WRB_SD/T-1WR2	1W	9-18,18-36	3.3,5,12,15,24	RoHS	universal	106
WRA_S-1WR2	1W	4.5-9,9-18,18-36,36-75	±5, ±9, ±12, ±15	RoHS CE	universal	107
WRB_S-1WR2	1W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	107
WRE_S-1WR2	1W	4.5-9,9-18,18-36,36-75	±5, ±12, ±15	RoHS CE	universal	107
WRF_S-1WR2	1W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	107
WRA_S-3WR2	3W	4.5-9,9-18,18-36,36-75	±5, ±9, ±12, ±15, ±24	RoHS CE	universal	110
WRB_S-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	110
WRA_ZP-3WR2	3W	4.5-9,9-18,18-36,36-75	±5, ±9, ±12, ±15, ±24	RoHS CE	universal	110
WRB_ZP-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	110
WRA_SD/T-3WR2	3W	9-18,18-36	±5, ±12, ±15, ±24	RoHS	universal	106
WRB_SD/T-3WR2	3W	9-18,18-36	3.3,5,12,15,24	RoHS	universal	106
WRE_S-3WR2	3W	4.5-9,9-18,18-36,36-75	±5, ±9, ±12, ±15	RoHS CE	universal	113
WRF_S-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	113
WRE_P-3WR2	3W	4.5-9,9-18,18-36,36-75	±3.3, ±5, ±9, ±12, ±15	RoHS CE	universal	113
WRF_P-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	113
VCB_SO-3WR3	3W	36-75	5,12,15,24	RoHS CE	universal	117
CWRF_S-3W	3W	7-18	15	RoHS	automotive	114
CVRC_JD-6WR3	6W	9-18	15/15/15	RoHS CE	automotive	115
VRA_YMD-6WR3	6W	9-18,18-36	±5, ±12, ±15	RoHS CE CB	universal	119
VRB_YMD-6WR3	6W	9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	119
VRA_ZP-6WR3	6W	4.5-9,9-18,18-36,36-75	±5, ±12, ±15, ±24	RoHS CE	universal	119
VRB_ZP-6WR3	6W	4.5-9,9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	119
VRB_S-6WR3	6W	9-18,18-36	3.3,5,9,12,15,24	RoHS CE	universal	119
VCB_SO-6WR3	6W	36-75	5,12,15,24	RoHS CE	universal	117
VRB_J(M)D/T-6W	6W	9-18,18-36	3.3,5,12,15	RoHS CE CB	universal	120
VRA_YMD-10WR3	10W	4.5-9	±5, ±12, ±15, ±24	RoHS CE	universal	124
VRB_YMD-10WR3	10W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	124
VRA_ZP-10WR3	10W	9-18,18-36,36-75	±5, ±12, ±15	RoHS CE	universal	124
VRB_ZP-10WR3	10W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	124
VRB_S-10WR3	10W	9-18,18-36	3.3,5,9,12,15,24	RoHS CE	universal	124
VCB_SBO-10WR3	10W	36-75	5,12,15,24	RoHS	universal	117
VRB_LD-15WR3	15W	18-36,36-75	3.3,5,12,15,24	RoHS CE CB	universal	127
VRB_YMD-15WR3	15W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	128
VRA_LD-20WR3	20W	18-36,36-75	±5, ±9, ±12, ±15, ±24	RoHS CE	universal	127
VRB_LD-20WR3	20W	9-18,18-36,36-75	3.3,5,9,12,15,24,110	RoHS CE	universal	127
VRB_YMD-20WR3	20W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	128
VRB_LD-30WR3	30W	18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	129
VRB_LD-40WHR3	40W	18-36,36-75	5,12,15,24	RoHS CE	universal	129

• This catalog is used to introduce our latest products, for more information, please contact our sales department

5-200W ultra-wide input voltage DC/DC converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
PV05/10/15-27BxxR2	5W,10W,15W	100-1000	5,9,12,15,24	RoHS CE	universal	83
PV10-27C	10W	200-1200	5/5/24	RoHS	universal	83
PV15-29BxxL	10W,15W	200-1500	5,12,15,24	RoHS	universal	84
PV15-29B	10W,15W	200-1500	5,12,15,24	RoHS CE	universal	84
PV15-29C	15W	200-1500	5/5/5,5/5/24	RoHS	universal	84
PV40-27B	40W	200-1200	12,15,24	RoHS	universal	84
PV40-29B	40W	200-1500	12,15,24	RoHS CE	universal	84
PV45-29D	45W	150-1500	12V/15V dual outputs (customization is acceptable)	RoHS	universal	85
PV50-29D	50W	150-1500	12V/15V dual outputs (customization is acceptable)	RoHS	universal	85
PV60-27D	60W	200-1100	12/15	RoHS	universal	83
PV75-36D	75W	250-3300	15,400	RoHS	universal	86
PV120-27B	90W,100W,120W	200-1100	12,15,24,48	RoHS	universal	87
PV150-29B	120W,150W	250-1500	12,15,24,48	RoHS	universal	88
PV200-27B	120W,150W,200W	200-1000	12,15,24,26,48	RoHS CE	universal	87
PV200-29B	200W	300-1500	24,48	RoHS CE	universal	88

3-30W 4:1 ultra-wide input voltage, isolated & regulated output DC/DC converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
PWB_ZP-3WR2	3W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE	universal	111
URB_MT-3WR3	3W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE	universal	111
URH_P-6WR3	6W	9-36,18-75	5,6,9,12,15,24	RoHS CE	medical	118
URH_LP-20WR3	20W	9-36,18-75	3.3,5,12,15,24	RoHS CE (pending)	medical	118
URA_YMD-6WR3	6W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE CB	universal	121
URB_YMD-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	121
URA_ZP-6WR3	6W	9-36,18-75	±5, ±9, ±12, ±15, ±24	RoHS CE CB	universal	121
URB_ZP-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	121
URE_P-6WR3	6W	9-36	±5, ±12, ±15	RoHS CE CB	universal	121
URF_P-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	121
URB_S-6WR3	6W	9-36	3.3,5,9,12,15,24	RoHS CE	universal	121
URA_YMD-10WR3	10W	9-36,18-75	±5, ±9, ±12, ±15, ±24	RoHS CE CB	universal	124
URB_YMD-10WR3	10W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	124
URE_LP-10WR3	10W	9-36,18-75	±5, ±12, ±15	RoHS CE CB	universal	124
URF_LP-10WR3	10W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	124
URA_ZP-10WR3	10W	9-36,18-75	±5, ±12, ±15	RoHS CE	universal	124
URB_ZP-10WR3	10W	9-36,18-75	3.3,5,12,15,24	RoHS CE	universal	124
URB_S-10WR3	10W	9-36	3.3,5,9,12,15,24	RoHS CE	universal	124
U/VRB-J(M)D/T-3W	3W	4.5-9,9-36	3.3,5,12,15,24	RoHS CE	universal	112
URB_J(M)D/T-10W	10W	9-36	5,12,15	RoHS CE CB	universal	123
URB_J(M)D/T-15W	15W	9-36,18-75	3.3,5,12,15	RoHS	universal	126
URA_YMD-15WR3	15W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE	universal	127
URB_YMD-15WR3	15W	9-36,18-75	3.3,5,12,15,24	RoHS CE CB	universal	127
URA_YMD-20WR3	20W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE	universal	127
URB_YMD-20WR3	20W	9-36,18-75	3.3,5,12,15,24	RoHS CE CB	universal	127
URA_LD-20WR3	20W	9-36,18-75	±5, ±9, ±12, ±15	RoHS CE CB	universal	127
URB_LD-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	127
URF_LP-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	127
URA_LD-30WR3	30W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE	universal	129
URB_LD-30WR3	30W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	universal	129
URB-YMD-30WR3	30W	18-75	5,12,15,24	RoHS	universal	129
URA1D_YMD-6WR3	6W	40-160	±5, ±12, ±15	RoHS CE	electric vehicle	132
URB1D_YMD-6WR3	6W	40-160	5,12,15,24	RoHS CE	electric vehicle	132
URA1D_(X)LMD-10WR3	10W	40-160	±5, ±12, ±15	RoHS CE	electric vehicle	132

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

DC/DC Converter Selection Guide

3-250W 4:1 ultra-wide input voltage, isolated & regulated output DC/DC converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
URB1D_LMD-10WR3	10W	40-160	3.3,5,12,15,24	RoHS	electric vehicle	132
URB1D_LMD-15WR3	15W	40-160	3.3,5,12,15,24	RoHS CE	electric vehicle	132
URB1D_LMD-20WR3	20W	40-160	3.3,5,12,15,24	RoHS CE	electric vehicle	132
URB1D_LD-20WR3	20W	40-160	3.3,5,12,15,24	RoHS CE	universal	132
URE1D_LD-20WR3	20W	40-160	±12, ±15, ±24	RoHS	universal	132
URF1D_LD-40WR3	40W	40-160	3.3,5,12,15,24,48	RoHS CE	universal	132
UW2405D-20W	20W	6-50	5	RoHS	universal	108
UWD240512D-20W	20W	6-60	5,12	RoHS	electric vehicle	108
URF1D_QB-50WR3	50W	43-160	3.3,5,12,15,24,48	RoHS	rail transit	133
URF1D_QB-75WR3	75W	43-160	3.3,5,12,15,24,48	RoHS	rail transit	133
URF1D_QB-100WR3	100W	43-160	3.3,5,12,15,24,48	RoHS	rail transit	133
URF1D_HB-150WR3	150W	43-160	5,12,15,24,48	RoHS	rail transit	133
URF1D_HB-250WR3	250W	40-160	5,12,15,24,48,54	RoHS	rail transit	133
URF_QB-75WR3	75W	18-75	5,12,15,24,48	RoHS CE	universal	131
URF_QB-100WR3	100W	9-36,18-75	5,12,15,24,28,48	RoHS CE	universal	131
URF_QB-150WR3	150W	18-75	5,12,15,24,48	RoHS CE	universal	131
URF_QB-200WR3	200W	18-75	5,12,15,24,48	RoHS CE	universal	131
URD_S-3WR3	3W	18-75	5/5,5/12,5/24	RoHS CE	universal	135
URD_YMD-10WR3	10W	18-75	5/5,5/12,5/24	RoHS CE	universal	135
URD_LD-20WR3	20W	18-75	5/5,5/12,5/24	RoHS CE	universal	135
URD_D-30WR3	30W	18-75	5/24	RoHS CE	universal	135

Wide Input Voltage, Non-isolated & regulated output DC/DC converter

Series	Output Current (mA)	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
K78-500R3	500/-300/-150	4.75-36	3.3,5,9,12,15,-5,-12,-15	RoHS CE CB	universal	103
K78L-500R3	500/-300/-150	4.75-36	3.3,5,12,15,-5,-12,-15	RoHS CE CB	universal	103
K78-1000R3(L)	1000/-500/-300	6-36	3.3,5,9,12,15,-5,-12,-15	RoHS CE CB	universal	103
K78L-1000R3	1000/-500/-300	6-36	3.3,5,12,15,-5,-12,-15	RoHS CE CB	universal	103
K78xxM-1000R3	1000/-500/-300	6-36	3.3,5,9,12,15,-5,-12,-15	RoHS CE	universal	103
K78U-500R3(L)	500	9-80	3.3,5,9,12,15	RoHS	universal	103
K78-3AR3	3000	8-36	5.6,5,12,15	RoHS	universal	103
K78-2000R3	2000	6-36	3.3,5,9,12,15	RoHS CE	universal	103
K78T-500R3	500	4.75-36	1.5,1.8,2.5,3.3,5,6,5,9,12,15	RoHS CE	universal	103
K78T-1000R3	1000/800	4.75-36	1.5,1.8,2.5,3.3,5,6,5,9,12	RoHS CE	universal	103
K78-JT-500R3	500	4.75-36	3.3,5,9,12,15	RoHS CE	universal	103
K12T-6A-P(N)	6000	8.3-14	0.75-5.5	RoHS CE	universal	105
K12T-10A/16A	10000/16000	8.3-14	0.75-5.5	RoHS CE	universal	105
KUB4824QB-10A	10000	30-75	24	RoHS	universal	105
KUB4812QB-10A	10000	16-75	12	RoHS	universal	105

Specialized for Super-capacitor and lithium battery-powered DC/DC converter

Series	Input Voltage Range (VDC)	Output Voltage (VDC)	Constant Current (mA)	Effi(%) (typ)	Certification	Applications	Page
URF2428LP-700	9-36	0-28.5	700	86/88	RoHS	Electric Power	122
URB24A5YMD-1000	9-36	0-4.8	1000	76/78	RoHS	Electric Power	122

6W 8:1 ultra-wide input isolated & regulated DC/DC converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
CUWB_YMD-6WR3	6W	4.5-36	3.3,5,12,15,24	RoHS CE	automotive	114

• This catalog is used to introduce our latest products, for more information, please contact our sales department

DC/DC Converter Selection Guide

600VDC/1000VDC/1250VDC/1500VDC/2000VDC high output voltage ,non-isolated & regulated output series

Series	Input Voltage Nominal (VDC)	Output Voltage Nominal (VDC)	Output Voltage Range(VDC)	Constant Current (mA)	Certification	Applications	Page
H01-P601-2C	12	600	0-600	2	RoHS	universal	108
H01-P102-20D	16	1000	0-1000	20	RoHS	universal	108
H01-P202-20D	16	2000	0-2000	20	RoHS	universal	108
H01-P(N)1251H-0.5C(D/F)	12,15,24	+1250/-1250	0 to +1250 / 0 to -1250	0.5	RoHS	universal	108
H01-P(N)1251V-0.5C(F)	12,24	+1250/-1250	0 to +1250 / 0 to -1250	0.5	RoHS	universal	108
H01-P(N)1501H-0.5C(D)	12,15	+1500/-1500	0 to +1500 / 0 to -1500	0.5	RoHS	universal	108

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

EMC Auxiliary Device

Series	Function	Input Voltage Range	Max. Output Power/Current	Certification	Page
FC-LX1D	EMC Filter	85-305VAC	1.5A	RoHS	137
FC-LX1D2	EMC Filter	85-305VAC	1.5A	RoHS	137
FC-L01DV1	EMC Filter	85-305VAC	0.3A	RoHS	137
FC-AX3D	EMC Filter	10-36VDC	30W	RoHS	137
FC-B02D	EMC Filter	18-75VDC	30W	RoHS	137
FC-D03D	EMC Filter	18-36VDC	50W	RoHS	137
FC-E03D	EMC Filter	36-75VDC	75W	RoHS	137
FC-A01D	EMC Filter	9-36VDC	1A	RoHS	137
FC-B01D	EMC Filter	18-75VDC	1A	RoHS	137
FC-C01D	EMC Filter	40-160VDC	10W	RoHS	138
FC-CX1D	EMC Filter	40-160VDC	30W	RoHS	138
FC-C03D	EMC Filter	40-160VDC	50W	RoHS	138
FC-CX3D	EMC Filter	66-160VDC	100W	RoHS	138
FI-B03D	EMI Filter	0-80VDC	3A	RoHS	138
FT-AX1D	EFT Suppressor	0-40VDC	1.5A	RoHS	139
FT-BX1D	EFT Suppressor	0-80VDC	1.5A	RoHS	139
FS-TD01D	485-AB Bus Surge Protection Module	0-5VDC	≤0.1	RoHS	139
FL2D	Common Mode Filter	/	0.5,1,3A	RoHS	140

Industrial Bus Isolation Transceiver Module

Series	Function	Power Supply	Data Rate	Nodes	Certification	Page
TD331/531S485	SMD single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	64	RoHS CE	143
TD331/531S485H	SMD single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	150kbps	128	RoHS CE	143
TD331/531S485H-A	SMD single RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	150kbps	128	RoHS CE	143
TD331/531S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45, 4.75-5.25VDC	500kbps	256	RoHS CE	143
TD331/531SCANH	SMD single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	110	RoHS CE	143
TD331/531SCANFD	SMD single CANFD isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-5Mbps	110	RoHS CE	143
CTD331/531SCANH	Automotive SMD single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	110	RoHS CE	142
TD331/531S232H	SMD single high-rate RS232 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	0-115.2kbps	1	RoHS CE	143
TD331/531S485-L	Low power consumption SMD single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	16	RoHS CE	143
TD321/521D485	Cost-effective single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	64	RoHS CE	144
TD321/521D485H	Single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	200kbps	64	RoHS CE	144
TD321/521D485H-A	Single RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	500kbps	128	RoHS CE	144
TD321/521D485H-E	Single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45, 4.75-5.25VDC	500kbps	256	RoHS CE	144
TD322/522D485H-A	Dual channel RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	120kbps	32	RoHS CE	144
TD321/521S485	Cost-effective SMD single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	64	RoHS CE	144
TD321/521S485H	SMD single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	200kbps	64	RoHS CE	144
TD321/521S485H-A	SMD single RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	500kbps	128	RoHS CE	144
TD321/521S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45, 4.75-5.25VDC	500kbps	256	RoHS CE	144
TD301/501M485	Single high-rate compact size RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	500kbps	64	RoHS CE	144
TDH301/501D485H	Single high-rate high isolation RS485 isolated transceiver module	3.17-3.45, 4.75-5.25VDC	115.2kbps	32	RoHS CE	144
TD321/521D485-L	Low power consumption single RS485 isolated transceiver module	3.17-3.45, 4.75-5.25VDC	19.2kbps	16	RoHS CE	144
TD321/521DCAN	Single universal CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	5k-1Mbps	110	RoHS CE, RoHS	146
TD321/521DCANH	Single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	110	RoHS CE	146
TD321/521SCAN	SMD single universal CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	5k-1Mbps	110	RoHS CE	146
TD321/521SCANH	SMD single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	110	RoHS CE	146
TD322/522DCAN	Dual channel CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	110	RoHS CE	146
TD301/501MCAN	Single high-rate compact size CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	110	RoHS CE	146
TD301/501MCANFD	Single high-rate compact size CANFD isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-5Mbps	110	RoHS CE	146

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Industrial Bus Isolation Transceiver Module

Series	Function	Power Supply	Data Rate	Nodes	Certification	Page
TD301/501DCANHE	High surge protective CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	20k-1Mbps	110	RoHS CE	146
TD302/502D232H	Dual channel high-rate RS232 isolated transceiver module	3.0-3.6, 4.5-5.5VDC	0-115.2kbps	2	RoHS	149
TLAxx-03K485	Integrated isolated 485 AC/DC power supply	85-305VAC/100-430VDC	500kbps	128	RoHS CE	148
TLAxx-03KCAN	Integrated isolated CAN AC/DC power supply	85-305VAC/100-430VDC	5-1000kbps	110	RoHS CE	148
TLAxx-03K485L	Integrated isolated 485 AC/DC power supply	85-305VAC/100-430VDC	19.2kbps	128	RoHS CE	148

Signal Conditioning Module

Series	Function	Input Signal	Output Signal	Isolation	Certification	Page
TN_T	SMD signal self-driving module	0-2.5V, 0-5V, 0-10V	0/4-10mA, 0-2.5/5/10V	2500VDC	RoHS CE (pending)	150
TE_N	Active module	0-5V, 0-10V, 4-20mA	0-5V, 0-10V	2000VAC	RoHS CE	151
TE_T	Active high precision positive signal	4-20mA, 0-5V	0-5V, 0-5V	2000VAC	RoHS	152
TE_AN	Active module positive and negative signal	±5V, ±10V	0-5V, 0-10V	2000VAC	RoHS CE	151
TE_CN	Active module positive and negative signal	±5V, ±10V	±5V, ±10V	2000VAC	RoHS CE	151
TEM_AN	Active, mV-class, positive and negative signal	±75mV/±100mV	0-5V	2000VAC	RoHS CE	151
TEM_CN	Active, mV-class, positive and negative signal	±50mV/±100mV/±200mV	±5V/±10V	2000VAC	RoHS CE	151
TF_N	Active module	0-5V, 0-10V	0/4-20mA, 0-5V, 0-10V	2000VAC	RoHS CE	153
TF_GN	Active module	0-5V	±10V	2000VAC	RoHS CE	153
TFW_N	Active high precision PWM signal	PWM signal 0-100%	0-20mA, 0-10V	2000VAC	RoHS CE	153
T_P	Active module	0/4-20mA, 0-5V, 0-10V	0/4-20mA, 0-5V, 0-10V	2500VDC	RoHS	154
T_CP	Active high precision signal	±5V, ±10V	±5V/±10V, ±20mA	2500VDC	RoHS	154
TM_P	Active high precision signal (mV-class)	0-10/20/30/50/75/100mV	0/4-20mA, 0-5V, 0-10V	2500VDC	RoHS	155
TM_CP	Active high precision signal (mV-class)	±10/±20/±50/±75/±100mV/±200mV	±5V/±10V	2500VDC	RoHS	155
T1100N	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	156
T1100L	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	156
T1100L-F	Passive module(loop power supply)	4-20mA	4-20mA	3000VDC	RoHS CE	156
T_HL	Two-wire self-powered module with HART	0-2.5V	3.7-22mA	2000VAC	RoHS CE	156
T_L	Two-wire loop power supply	0-2.5V	3.7-22mA	2000VAC	RoHS CE	156
TRP_P	RTDs detection type isolated module	Pt100(0-500°C)	4-20mA	2000VAC	RoHS CE	157
TE_HN	Active high precision high isolated detection type signal	0-5V	0-5V	4000VAC	RoHS	157

LED Driver

Series	Input Voltage Range(VDC)	Output Voltage(VDC)	Output Current(mA)	Certification	Page
KC24H-1000	5.5-48	3.3-36	1000	RoHS	162
KC24H-1200	5.5-48	3.3-36	1200	RoHS	162
KC24H-R	5.5-46	3.3-36	0-300, 0-350, 0-500, 0-600, 0-700	RoHS	162
KC24W	5.5-48	3.3-36	0-300, 0-350, 0-500, 0-600, 0-700	RoHS	162
KC24RT	5.5-48	3.3-36	0-300, 0-350, 0-500, 0-600, 0-700	RoHS	162
KC24JT	6-36	3.3-36	300, 700	RoHS	163

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Hybrid integrated IGBT driver (built-in isolated DC/DC converter)

Series	Power Supply (VDC)	Input Voltage Range(VDC)	Output High-level Voltage VOH(VDC)	Output Low-level Voltage VOL(VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QP12W08S-37	15	14.5-15.5	15	-9	±8	20	3750VAC	RoHS	160

Hybrid integrated IGBT driver

Series	Power Supply VCC(VDC)	Power Supply VEE(VDC)	Gate Voltage (VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QC962-8A	15	-10	+15/-9	±8	40	3750VAC	RoHS	161

DC/DC converter for IGBT driver

Series	Nominal Input Voltage(VDC)	Input Voltage Range (VDC)	Positive Output (VDC)	Negative Output (VDC)	Output Current (mA)	Efficiency	Isolation	Certification	Page
QA01	15	14.5-15.5	+15	-8.7	+80/-40	80%	3000VAC	RoHS CB CE	158
QA01-17	15	14.5-15.5	+17	-8.7	+80/-40	77%	3000VAC	RoHS CB CE	158
QA02	12	11.6-12.4	+15	-8.7	+80/-40	80%	3000VAC	RoHS CB CE	158
QA03	24	23.3-24.7	+15	-8.7	+80/-40	80%	3000VAC	RoHS CB CE	158
QA04	12	9-15	+15	-8	+100/-80	80%	3000VAC	RoHS CB CE	158
QA01C	15	13.5-16.5	+20	-4	+100/-100	83%	3500VAC	RoHS CB CE	158
QA1201C-20	12	10.8-13.2	+20	-4	+100/-100	80%	3500VAC	RoHS	158
QA2401C-20	24	21.6-26.4	+20	-4	+100/-100	83%	3500VAC	RoHS	158
QA15115R2	15	13.5-16.5	+15	-2.5	+100/-100	80%	3500VAC	RoHS	158
QA01C-18	15	13.5-16.5	+18	-3	+100/-100	83%	3500VAC	RoHS	158
QA121C2	12	10.8-13.2	+15	-3.5	-111/-111	78%	3500VAC	RoHS	158
QA151M	15	14.4-15.9	+15	-5	+100/-100	80%	3500VAC	RoHS	158
QA051C	5	4.5-5.5	+20	-5	+80/-40	75%	3000VAC	RoHS	158
QA151C3	15	13.5-16.5	+15	-4	+100/-100	77%	3000VDC	RoHS	158
QAW01	12	9-18	+15	-9	+200/-200	85%	3500VAC	RoHS	159
QAW02	24	18-36	+15	-9	+200/-200	85%	3000VDC	RoHS	159
QA152D	15	13.5-16.5	+15	-9	+200/-200	83%	4000VAC	RoHS CE	159
QA156D-24	15	13.5-16.5	+24	/	+150/-	80%	12000VDC	RoHS CE	159
QAU242D2G	24	9-36	+24	+24	+150/+150	85%	4200VAC	RoHS	159
QA121	12	11.4-12.6	+15	-8	+120/-120	81%	3000VAC	RoHS	158
QA151	15	14.25-15.75	+15	-8	+120/-120	81%	3000VAC	RoHS	158
QA241	24	22.8-25.2	+15	-8	+120/-120	81%	3000VAC	RoHS	158
CQAW01	12	7-18	+15	-9	+200/-200	81%	3000VAC	RoHS	160

Signal isolator / isolation barrier

Series	Function	Input Signal	Output Signal	Feature	Page
TAx0W	Analog signal	4-20mA,0-10V	0/4-20mA,0-10V	DIN-Rail power supply	164
TAx05W	DC current input analog signal	4-20mA	4-20mA,1-5V,0-10V	DIN-Rail power supply	164
TAx06W	Passive Barrier	4-20mA	4-20mA	/	165
TRxx0PW	Programmable RTD	Pt100,Cu50,Cu100	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	165
TR1x0PWE	Programmable RTD	Pt100,Cu50,Cu100	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	166
TCxx0PW	Programmable thermocouple	R,S,K,J,T,B,E thermocouple,mV signal	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	166

AC/DC power control IC

Series	Power (W)	Topology	Control Mode	Fsw (kHz)	Vds(max) (V)	HV	OTP ¹	OVP ²	OCP ³	Package	Page
SCM1702A	≤5	flyback	current mode PSR	110	650V	✓	built-in	built-in	built-in	SOP-7	167
SCM1703A	≤5	flyback	current mode SSR	110	650V	✓	built-in	built-in	built-in	SOP-7	167
SCM1710A	5-60	flyback	current mode SSR	110	-	-	external	built-in	built-in	SOP-8	167

AC/DC power start-up IC

Series	Input Voltage Range(VDC)	Ivdd(min) (mA)	Ivdd(max) (mA)	Operating Junction Temperature(°C)	Vvdd(max)(V)	Package	Page
SCM9601A	40-700	0.8	4	-40°C to +125°C	20	SOT-23	167
SCM9602A	40-700	1	4	-40°C to +125°C	20	SOT-23	167

DC/DC power control IC

Series	Power (W)	Topology	Control Mode	Vds(max) (V)	OTP ¹	OCP ²	SCP ³	UVLO ⁴	OLP ⁵	Package	Page
SCM1101A	5-40	flyback/forward	current mode	480	/	built-in	built-in	built-in	built-in	MSOP-8	169
SCM1201A	≤1	push-pull	current mode	/	built-in	/	built-in	built-in	/	SOT-23-6	169
SCM1212A	≤1	push-pull	current mode	/	built-in	/	built-in	built-in	/	SOT-23-5	169

DC/DC power start-up IC

Series	Input Voltage Range(VDC)	Ivdd(min) (mA)	Ivdd(max) (mA)	Operating Junction Temperature(°C)	Vvdd(max)(V)	Package	Page
SCM9603B	4-85	2.3	20	-40°C to +125°C	10	SOT-23	169

DC/DC power non-isolated buck control IC

Series	Vcc(V)	Output Current (max)(A)	Switching Frequency(KHz)	Operating Junction Temperature(°C)	Synchronous Rectification	Package	Page
SCM1301A	4.5-40	1	700	-40°C to +150°C	-	TSOT23-6L	169
SCM1316A	7-38	6	130-300	-40°C to +150°C	✓	QFN5*5-20	169

Interface IC

Series	Vcc(V)	Data bus	Duplex Mode	Nodes	NO. of TX	NO. of TR	Baud Rate (Mbps)	Package	Page
SCM3401A	4.5-5.5	RS485	Half	256	1	1	1	SOP-8	172
SCM3401B	4.5-5.5	RS485	Half	256	1	1	1	DFN 3X3	172
SCM3402A	3.0-3.6	RS485	Half	256	1	1	12	SOP-8	172
SCM3421A	4.5-5.5	CAN	Half	110	1	1	1	SOP-8	172
SCM3422A	4.5-5.5	CAN	Half	110	1	1	1	SOP-8	172
SCM3423A	4.5-5.5	CAN	Half	110	1	1	1	SOP-8	172

Contact power saving controller IC

Series	Vcc(V)	Fast Shutdown Function	F _{BUCK} ¹	V _{ACT_AC} ²	V _{OFF_AC} ³	Package	Page
SCM1501B	16.5-500	✓	23.5kHz	2.4V	1.6V	ESOP-8	174
SCM1502A	7-40	✓	23.7kHz	0.8V	0.6V	ESOP-8	174

• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Transformer Selection Guide

Transformer

Series	Power (W)	Input Voltage Range	Output Voltage (VDC)	output channels	Isolation	Package	Bobbin	Control Mode	Certification	Page
TTL503-15B-T	3	85-305VAC	5,12	1	3000VAC	SMD	EPC13	flyback	RoHS	175
TTLDE05-20B-D	5	85-264VAC	5,12	1	4000VAC	SIP	EE10	flyback	RoHS	175
TTLHE10-20B-D	10	85-264VAC	5,12	1	3000VAC	SIP	EFD15	flyback	RoHS	175
TTLHE20-20B-D	20	85-264VAC	12	1	4000VAC	SIP	EFD20	flyback	RoHS	175
TTLHE25-20B-D	25	85-264VAC	12	1	4000VAC	SIP	EFD25	flyback	RoHS	175
TSHT5.8-01	1	4.5-5.5VDC	5	1	3000VDC	SMD	/	push-pull	RoHS	177
TTB05xx-1T	1	4.5-5.5VDC	5,9	1	1650VDC	SMD	/	push-pull	RoHS	177
TTURB-6T	6	9-36VDC	5	1	1650VDC	SMD	ER11.5	flyback	RoHS	178
TTURA-10T	10	9-36,18-75VDC	±5, ±15	2	1650VDC	SMD	ER11.5	flyback	RoHS	178
TTURB-10T	10	9-36,18-75VDC	5	1	1650VDC	SMD	ER11.5	flyback	RoHS	178
TTURB-20T	20	9-36VDC	5	1	1650VDC	SMD	ER14.5	flyback	RoHS	178

Transformer for automotive

Series	Power (W)	Input Voltage Range	Output Voltage (VDC)	output channels	Isolation	Package	Bobbin	Control Mode	Certification	Page
CTTFB-1T	1	4.5-5.5VDC	5	1	3000VAC/4250VDC	SMD	/	push-pull	RoHS	182
CTTF-1T	1	4.5-5.5VDC	5	1	3000VDC	SMD	/	push-pull	RoHS	182
CTTURB-6T	6	9-36VDC	5	1	1650VDC	SMD	ER11.5	flyback	RoHS	181
CTTURA-10T	10	9-36,18-75VDC	±5, ±15	2	1650VDC	SMD	ER11.5	flyback	RoHS	181
CTTURB-10T	10	9-36,18-75VDC	5	1	1650VDC	SMD	ER11.5	flyback	RoHS	181
CTTURB-20T	20	9-36VDC	5	1	1650VDC	SMD	ER14.5	flyback	RoHS	181

• This catalog is used to introduce our latest products, for more information, please contact our sales department



Recommended Selection of AC/DC Converter for Application Environment >>>

Causes and basis for classification

Cause:

AC/DC converter can be used in various applications which are complicated and volatile in practical application, such as commercial, industrial and military environment. Whereas many people do not take the requirement and impact of environment to product performance into consideration and misunderstand that AC/DC converter can be used in all environments; which may cause:

- 1.Redundant performance results in increased system cost which further weaken its market competitiveness.
- 2.Inadequate performance results in damage to system or even cause it unable to work normally

So it does matter that "Choose the product that works". To make the most optimal choice for performance, price and reliability, the assessment and classification of practical application environment is needed; which can avoid traps and over design.

Basis:

The characteristics of system operation, change range of environment temperature, requirement of industry standard for power supply in performance and certification.

Commercial Indoor Environment

- Operation environment: intermittent power supply mode, system runs on standby for most of the time
- Environment temperature: -10°C to +40°C
- Performance requirement: EMI meets CLASS B
- Applications: household appliances, consumer electronics, office equipments



Suitable for smart home, household appliances

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS eULus CE CB	49
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS eULus CE CB	49
LS05-13BxxSR2S(-F)	5W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS eULus CE CB	49
LS08-13BxxSS(-F)	8W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS eULus CE CB	49
LS10-13BxxSS(-F)	10W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS eULus CE CB	49
LS01-K3B05SS	1W	85-305VAC/70-430VDC	5	RoHS CE	50
LS03-K3B12SS	3W	85-305VAC/70-430VDC	12	RoHS CE	50
L003-10B	3W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS	67
L005-12B	5W	165-264VAC/230-370VDC	3,3,5,9,12,15,24	RoHS	67
L015-10B	15W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS eULus CE CB	67
L030-10B	30W	85-264VAC/100-370VDC	3,3,5,9,12,15,24,48	RoHS eULus CE CB	67
L045-10B	45W	85-264VAC/100-370VDC	3,3,5,9,12,15,24,48	RoHS eULus CE CB	67
L065-10B	65W	85-264VAC/100-370VDC	5,9,12,15,24,48	RoHS eULus CE CB	67

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Recommended Selection of AC/DC Converter for Application Environment

Industrial Indoor Environment

- Operation environment: system runs without interruption
- Environment temperature: -25°C to +55°C
- Performance requirement: EMI meets CLASS B
- Application: intelligent building, building monitoring



Suitable for intelligent building, smart agriculture

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LI30-20BxxPR2	30W	85-264VAC/120-370VDC	5,12,15,24,48	RoHS CE	74
LI60-20BxxPR2	60W	85-264VAC/120-370VDC	5,12,15,24,48	RoHS CE	74
LI100-20BxxPR2	100W	85-264VAC/120-370VDC	12,15,24,48	RoHS CE	74
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS CE	51
LSF01-K5BxxSS	1W	15-380VDC	12.5/5	RoHS	50
LD03-16B	3W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	54
LD10-26B	10W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS CE	54
LD20-26B	20W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS CE	54
LD01-10B	1W	85-305VAC/120-430VDC	3.3,5,9,12,15,24	RoHS eFUS CE	56
LDE02-23B	2W	85-305VAC/120-430VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	56
LDE05-23B	5W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	56
LDE10-23B	10W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	56
LDE03-20B	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	57
LDE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	57
LDE06-20B	6W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	57
LDE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	57
LDE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	57
LDE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS eFUS CE CB	57
LDE45-20B	45W	85-264VAC/100-370VDC	5,12,15,24,48	RoHS CE	57
LDE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	RoHS CE	57
KNX20-22A640	20W	180-264VAC/254-370VDC	30	RoHS KNX (pending)	73

Series	Power	Input Voltage Range	Output Available (Vo1/Vo2/Vo3)	Output Available (Vo4/Vo5)	Output Available (Vo6/Vo7)	Certification	Page
LO10-10J	10W	85-264VAC/120-370VDC	Triple outputs available (3.3V-24V)	Positive and negative voltage available (±5V to ±24V)	Positive and negative voltage available (±5V to ±70V)	RoHS	69

Special Industrial Indoor Environment

- Operation environment: closed to or direct connect/contact with human body
- Environment temperature: -25°C to +70°C
- Performance requirement: EMI meets CLASS B, typical application or certification requirements
- Application: medical



Suitable for medical equipment

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LD05-20BxxMU	5W	85-264VAC/100-370VDC	5,12,15,24	RoHS eFUS CE	65
LD08-20BY4-US	7.6W	85-264VAC/100-370VDC	3.8	RoHS CE eFUS	65
LH15-20BxxMU	15W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS CE CB	66
LH25-20BxxMU	25W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS CE CB	66

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Recommended Selection of AC/DC Converter for Application Environment

Industrial Outdoor Environment

- Operation environment: system runs without interruption
- Environment temperature: -40°C to +70°C
- Performance requirement: EMS meets level 3
- Application: intelligent transportation, communication, video surveillance, charging station, agriculture and animal husbandry



Suitable for intelligent transportation, video surveillance, charging station

Series	Power	Input Voltage Range	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LM35-20B	35W	85-264VAC/120-373VDC	5,12,15,24	/	RoHS CE CCC	39
LM35-22B	35W	165-264VAC/180-373VDC	5,12,15,24	/	RoHS CE CCC	39
LM35-10C	35W	85-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	/	RoHS CE	39
LM35-10D	35W	85-264VAC/120-373VDC	+5/+12,+5/+24	/	RoHS eFUS CE	39
LM50-20B	50W	85-264VAC/120-373VDC	5,12,15,24	/	RoHS CE CCC	39
LM50-22B	50W	165-264VAC/180-373VDC	5,12,15,24	/	RoHS CE CCC	39
LM50-10C	50W	85-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	/	RoHS CE	39
LM50-10D	50W	85-264VAC/120-373VDC	+5/+12,+5/+24	/	RoHS CE	39
LM75-20B	75W	85-264VAC/120-373VDC	5,12,15,24,48	/	RoHS CE CCC	40
LM75-22B	75W	165-264VAC/200-373VDC	5,12,15,24,48	/	RoHS CE CCC	40
LM75-10C	75W	90-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	/	RoHS CE	40
LM75-10D	75W	90-264VAC/120-373VDC	+5/+12,+5/+24	/	RoHS eFUS CE	40
LM100-20B	100W	85-264VAC/120-373VDC	5,12,15,24,36,48	/	RoHS CE CCC	42
LM100-22B	100W	165-264VAC/200-373VDC	5,12,15,24,36,48	/	RoHS CE CCC	42
LM100-10C	100W	90-264VAC/120-373VDC	+5/+12/-12,+5/+15/-15,+5/+24/+12	/	RoHS CE	42
LM100-10D	100W	90-264VAC/120-373VDC	+5/+24,+12/+24	/	RoHS CE	42
LM150-20B	150W	85-264VAC/120-373VDC	12,15,24,36,48	/	RoHS CE CCC	43
LM150-22B	150W	165-264VAC/180-373VDC	12,15,24,36,48	/	RoHS CE CCC	43
LM200-10B	200W	90-132VAC/180-264VAC	5,12,15,24,36,48	/	RoHS CE CCC	44
LM200-12B	200W	176-264VAC/240-373VDC	5,12,15,24,36,48	/	RoHS CE CCC	44
LM350-10B	350W	90-132VAC/180-264VAC	5,12,15,24,36,48	/	RoHS CE CCC	45
LM350-12B	350W	176-264VAC/240-373VDC	5,12,15,24,36,48	/	RoHS CE CCC	45
LMF75-20B (With PFC)	75W	85-264VAC/120-370VDC	5,12,15,24,48	/	RoHS CE CCC (pending)	46
LMF100-20B (With PFC)	100W	85-264VAC/120-373VDC	5,12,15,24,48	/	RoHS CE CCC (pending)	46
LMF150-20B (With PFC)	150W	85-264VAC/120-373VDC	5,12,15,24,48	/	RoHS CE CCC (pending)	46
LMF200-20B (With PFC)	200W	85-264VAC/120-373VDC	5,12,15,24,48	/	RoHS CE CCC (pending)	46
LMF320-20B (With PFC)	320W	85-264VAC/120-373VDC	5,12,15,24,48	/	RoHS CE CCC (pending)	46
LI120-13B	120W	85-305VAC/100-430VDC	12,24	/	RoHS	75
LI75-20BxxR2	75W	90-264VAC/120-373VDC	12,24,48	/	RoHS CE (pending)	75
LI120-20BxxR2	120W	90-264VAC/127-370VDC	12,24,48	/	RoHS CE (pending)	75
LIR-20	/	22-60VDC	Vin-0.65V	/	RoHS CE (pending)	76
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	51
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE05-20A	5W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	61
LHE05-20C	5W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	61
LHE05-20D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	61
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE10-20A	10W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	61
LHE10-20C	10W	85-264VAC/100-370VDC	5	±12,±15	RoHS	61

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Recommended Selection of AC/DC Converter for Application Environment



Suitable for intelligent transportation, video surveillance, charging station

Series	Power	Input Voltage Range	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LHE10-20D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	61
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE15-20A	15W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	61
LHE15-20C	15W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	61
LHE15-20D	15W	85-264VAC/100-370VDC	5	5,12,24	RoHS	61
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE20-20A	20W	85-264VAC/100-370VDC	+12,+15	-12,-15	RoHS	61
LHE20-20C	20W	85-264VAC/100-370VDC	5	±12,±15	RoHS	61
LHE20-20D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS	61
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS eFUS CE CB	61
LHE40-20B	40W	85-264VAC/100-370VDC	3.3,5,12,15,24,48	/	RoHS CE	62
LHE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	/	RoHS CE	62
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5	±12,24	RoHS	65
LO10-24B	6.6W	30-280VAC/30-400VDC	5,12,13	/	RoHS	69
LO10-26D0512-04L	10.92W	57-528VAC/80-745VDC	5.1	12	RoHS	70
LO15-26D1212-03/LO15-26D1305-03	13.2W,15W	57-528VAC/80-745VDC	12,13.5	12.5	RoHS	70
LO20-10C0512-01	18.7W	165-264VAC/230-370VDC	5	±12	RoHS	70
LO30-10C0512-12	31.2W	85-264VAC/100-370VDC	5	±12	RoHS	70
LH10/15/25-10B/DxxER2	10W,15W,25W	85-264VAC/100-370VDC	5,12,15,24	5,12,24	RoHS eFUS CE CB	71



Suitable for communication and security

Series	Power	Input Voltage Range	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE05-20A	5W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	61
LHE05-20C	5W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	61
LHE05-20D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	61
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE10-20A	10W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	61
LHE10-20C	10W	85-264VAC/100-370VDC	5	±12,±15	RoHS	61
LHE10-20D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	61
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE15-20A	15W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	61
LHE15-20C	15W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	61
LHE15-20D	15W	85-264VAC/100-370VDC	5	5,12,24	RoHS	61
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	61
LHE20-20A	20W	85-264VAC/100-370VDC	+12,+15	-12,-15	RoHS	61
LHE20-20C	20W	85-264VAC/100-370VDC	5	±12,±15	RoHS	61
LHE20-20D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS	61
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS eFUS CE CB	61
LHE40-20B	40W	85-264VAC/100-370VDC	3.3,5,12,15,24,48	/	RoHS CE	62
LHE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	/	RoHS CE	62

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Recommended Selection of AC/DC Converter for Application Environment



Suitable for agriculture and animal husbandry

Series	Power	Input Voltage Range	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LH05-13B	5W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	59
LHE10-23B	10W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	/	RoHS CE	59
LHE15-23B	15W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	/	RoHS eFUS CE CB	59
LH20-13B	20W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	59
LHE25-23B	25W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	/	RoHS eFUS CE CB	59
LHE60-23B	60W	85-305VAC/100-430VDC	5,12,15,24,48	/	RoHS CE	59
LHE40-20B	40W	85-264VAC/100-370VDC	3.3,5,12,15,24,48	/	RoHS CE	62
LHE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	/	RoHS CE	62

Special Industrial Outdoor Environment(Harsh Environment)

- Operation environment: large fluctuation in input voltage, system runs without interruption, suitable for outdoor applications with high/low temperature, high humidity, high pollution or strong noise interference
- Environment temperature: -40°C to +85°C
- Performance requirement: EMS meets level 4, wide and high input voltage
- Application: roadside equipment, electricity, environment monitoring, communication base



Suitable for roadside equipment

Series	Power	Input Voltage Range	Output Voltage(VDC) (Vo1)	Output Voltage(VDC) (Vo2)	Certification	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	62
LHE05-20A	5W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	62
LHE05-20C	5W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	62
LHE05-20D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	62
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	62
LHE10-20A	10W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	62
LHE10-20C	10W	85-264VAC/100-370VDC	5	±12,±15	RoHS	62
LHE10-20D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	62
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	62
LHE15-20A	15W	85-264VAC/100-370VDC	+5,+12,+15	-5,-12,-15	RoHS	62
LHE15-20C	15W	85-264VAC/100-370VDC	5	±5,±12,±15	RoHS	62
LHE15-20D	15W	85-264VAC/100-370VDC	5	5,12,15	RoHS	62
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS eFUS CE CB	62
LHE20-20A	20W	85-264VAC/100-370VDC	+12,+15	-12,-15	RoHS	62
LHE20-20C	20W	85-264VAC/100-370VDC	5	±12,±15	RoHS	62
LHE20-20D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS	62
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS eFUS CE CB	62



Suitable for electricity

Series	Long term power	Instantaneous power	Input Voltage Range	Load voltage /current	Floatvoltage /charge current	Certification	Page
MBP300-2A27D27M	40.5W	270W/15s,432W/1s	165-264VAC	27V/1A	27V/0.5A	RoHS	72

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Recommended Selection of AC/DC Converter for Application Environment



Suitable for electricity

Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Current (mA)	Certification	Page
PVA40-26B	40W	460-1500VAC	12,28,35	3400,1430,1150	RoHS	81
PVA40-27B	40W	85-900VAC	18,24,30	2222,1667,1333	RoHS	79
PVA70-27B	70W	85-900VAC	24,28,35	2917,2500	RoHS	79
PVA120-27B	120W	85-900VAC	28,35	4300,3500	RoHS	79
PVA120-27B-C	120W	85-900VAC	35	3500	RoHS	79



Suitable for environment monitoring, communication base

Series	Power	Input Voltage Range	Output Voltage(VDC) (Vo1)	Output Voltage(VDC) (Vo2)	Certification	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS	61
LHE05-20A	5W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	61
LHE05-20C	5W	85-264VAC/100-370VDC	5	±5, ±12, ±15	RoHS	61
LHE05-20D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	61
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS	61
LHE10-20A	10W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	61
LHE10-20C	10W	85-264VAC/100-370VDC	5	±12, ±15	RoHS	61
LHE10-20D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	61
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS	61
LHE15-20A	15W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	61
LHE15-20C	15W	85-264VAC/100-370VDC	5	±5, ±12, ±15	RoHS	61
LHE15-20D	15W	85-264VAC/100-370VDC	5	5,12,24	RoHS	61
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS	61
LHE20-20A	20W	85-264VAC/100-370VDC	+12, +15	-12, -15	RoHS	61
LHE20-20C	20W	85-264VAC/100-370VDC	5	±12, ±15	RoHS	61
LHE20-20D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS	61
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS	61



Mining industry



Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Current (mA)	Certification	Page
PVA40-26B	40W	460-1500VAC	12,28,35	3400,1430,1150	RoHS	81
PVA40-27B	40W	85-900VAC	18,24,30	2222,1667,1333	RoHS	79
PVA70-27B	70W	85-900VAC	24,28,35	2917,2500	RoHS	79
PVA120-27B	120W	85-900VAC	28,35	4300,3500	RoHS	79
PVA120-27B-C	120W	85-900VAC	35	3500	RoHS	79

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Recommended Selection of AC/DC Converter for Application Environment

Special Industrial Outdoor Environment(Plateau)

- Operation environment: large fluctuation in input voltage, suitable for high-altitude applications (up to 2000 meters)
- Environment temperature: -40°C to +70°C
- Performance requirement: EMS meets level 4, wide and high input voltage range, good heat dissipation and high reliability



- Application: electricity, environment monitoring



Suitable for electricity

100-1500VDC Ultra-wide Input Voltage DC/DC Converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
PV05/10/15-27BxxR2	5W,10W,15W	100-1000	5,9,12,15,24	RoHS	83
PV10-27C	10W	200-1200	5/5/24	RoHS	83
PV15-29BxxL	10W,15W	200-1500	5,12,15,24	RoHS	84
PV15-29B	10W,15W	200-1500	5,12,15,24	RoHS	84
PV15-29C	15W	200-1500	5/5/5,5/5/24	RoHS	84
PV40-27B	40W	200-1200	12,15,24	RoHS	84
PV40-29B	40W	200-1500	12,15,24	RoHS	84
PV45-29D	45W	150-1500	12V/15V dual outputs(customization is acceptable)	RoHS	85
PV50-29D	50W	150-1500	12V/15V dual outputs(customization is acceptable)	RoHS	85
PV60-27D	60W	200-1100	12/15	RoHS	83
PV75-36D	75W	250-3300	15,400	RoHS	86
PV120-27B	90W,100W,120W	200-1100	12,15,24,48	RoHS	87
PV150-29B	120W,150W	250-1500	12,15,24,48	RoHS	88
PV200-27B	120W,150W,200W	200-1000	12,15,24,26,48	RoHS	87
PV200-29B	200W	300-1500	24,48	RoHS	88

Special Industrial Outdoor Environment(Ocean)

- Large fluctuation in input voltage, suitable for outdoor applications with salt spray corrosion, high temperature, high humidity
- Environment temperature: -25°C to +70°C
- Performance requirement: Anti salt spray corrosion; wide input voltage range; good heat dissipation and high reliability



- Application: Shipborne device, offshore device



Ship communication system

Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Current (A)	Certification	Page
LI80-13C2412-10-ZX	77W	85-305VAC/100-430VDC	24/12/5	2.5/1.0/1.0	RoHS	77
LI120-10B24-ZX	120W	85-264VAC/100-370VDC	24	5	RoHS	77
LI150-13B29	150W	85-305VAC/100-430VDC	29	5.2	RoHS	77

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com



Recommended Product Line for Applications



Industrial Control



High/low voltage VFD & Inverter & UPS & ESS

Series	Nominal Input Voltage(VDC)	Input Voltage Range(VDC)	Positive Output/Negative Output (VDC)	Output Current (mA)	Efficiency	Isolation	Certification	Page
QA01	15	14.5-15.5	+15/-8.7	+80/-40	80%	3000VAC	RoHS CB CE	158
QA01-17	15	14.5-15.5	+17/-8.7	+80/-40	77%	3000VAC	RoHS CB CE	158
QA02	12	11.6-12.4	+15/-8.7	+80/-40	80%	3000VAC	RoHS CB CE	158
QA03	24	23.3-24.7	+15/-8.7	+80/-40	80%	3000VAC	RoHS CB CE	158
QA04	12	9-15	+15/-8	+100/-80	80%	3000VAC	RoHS CB CE	158
QA01C	15	13.5-16.5	+20/-4	+100/-100	83%	3500VAC	RoHS CB CE	158
QA1201C-20	12	10.8-13.2	+20/-4	+100/-100	80%	3500VAC	RoHS	158
QA2401C-20	24	21.6-26.4	+20/-4	+100/-100	83%	3500VAC	RoHS	158
QA15115R2	15	13.5-16.5	+15/-2.5	+100/-100	80%	3500VAC	RoHS	158
QA01C-18	15	13.5-16.5	+18/-3	+100/-100	83%	3500VAC	RoHS	158
QA121C2	12	10.8-13.2	+15/-3.5	-111/-111	78%	3500VAC	RoHS	158
QA151M	15	14.4-15.9	+15/-5	+100/-100	80%	3500VAC	RoHS	158
QA051C	5	4.5-5.5	+20/-5	+80/-40	75%	3000VAC	RoHS	158
QA151C3	15	13.5-16.5	+15/-4	+100/-100	77%	3000VDC	RoHS	158
QAW01	12	9-18	+15/-9	+200/-200	85%	3500VAC	RoHS	159
QAW02	24	18-36	+15/-9	+200/-200	85%	3000VDC	RoHS	159
QA152D	15	13.5-16.5	+15/-9	+200/-200	83%	4000VAC	RoHS CE	159
QA156D-24	15	13.5-16.5	+24/0	+150/-	80%	12000VDC	RoHS CE	159
QAU242D2G	24	9-36	+24/+24	+150/+150	85%	4200VAC	RoHS	159
QA121	12	11.4-12.6	+15/-8	+120/-120	81%	3000VAC	RoHS	158
QA151	15	14.25-15.75	+15/-8	+120/-120	81%	3000VAC	RoHS	158
QA241	24	22.8-25.2	+15/-8	+120/-120	81%	3000VAC	RoHS	158
CQAW01	12	7-18	+15/-9	+200/-200	81%	3000VAC	RoHS	160

Series	Input Voltage (VDC)	Input Voltage Range(VDC)	Output High-level Voltage VOH(VDC)	Output Low-level Voltage VOL(VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QP12W08S-37	15	14.5-15.5	15	-9	±8	20	3750VAC	RoHS CE	160

Series	Positive input Voltage (VDC)	Negative input Voltage (VDC)	Output High-level Voltage VOH (VDC)	Output Low-level Voltage VOL (VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QC962-8A	15	-10	14	-9	±8	40	3750VAC	RoHS	161



Robot

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URB-LD-20WR3	20W	9-36, 18-75	3.3, 5, 9, 12, 15, 24	RoHS CB CE	127
URB-LD-30WR3	30W	9-36, 18-75	3.3, 5, 9, 12, 15, 24	RoHS CB CE	129
URF-QB-100WR3	100W	9-36, 18-75	5, 12, 15, 24, 28, 48	RoHS CE	133
URF-QB-200WR3	200W	18-75	5, 12, 15, 24, 48	RoHS CE	131

Recommended Product Line for Applications



DCS & PLC & SCADA

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LHE-20B	5W,10W,15W,20W,25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CB CE	61
LHE-23B	10W,15W,25W,40W,60W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	RoHS CB CE	59
LHE40-20B	40W	85-264VAC/100-370VDC	3.3,5,12,15,24,48	RoHS CE	62
LHE60-20B	60W	85-264VAC/100-370VDC	5,12,15,24,48	RoHS CE	62

Series	Power	Input Voltage Range(VDC)	Output Voltage (VDC)	Certification	Page
WRA_S-1WR2/3WR2	1W,3W	4.5-9,9-18,18-36,36-75	±5,±9,±12,±15,±24	RoHS CE	107,110
WRB_S-1WR2/3WR2	1W,3W	4.5-9,9-18,18-36,36-75	3.3,5,6,9,12,15,24	RoHS CE	107,110
WRA_SD/T-1WR2/3WR2	1W,3W	9-18,18-36	±3.3,±5,±12,±15,±24	RoHS	106
WRB_SD/T-1WR2/3WR2	1W,3W	9-18,18-36	3.3,5,12,15,24	RoHS	106

Series	Function	Power Supply	Data Rate	Certification	Page
TD331/531S485	SMD single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	RoHS CE	143
TD331/531S485H	SMD single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	150kbps	RoHS CE	143
TD331/531S485H-A	SMD single RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	150kbps	RoHS CE	143
TD331/531S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45, 4.75-5.25VDC	500kbps	RoHS CE	143
TD331/531SCANH	SMD single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	RoHS CE	143
TD331/531SCANFD	SMD single CANFD isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-5Mbps	RoHS CE	143
TD331/531S232H	SMD single high-rate RS232 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	0-235kbps	RoHS CE	143
TD331/531S485-L	Low power consumption SMD single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	RoHS CE	143
TD321/521D485	Cost-effective single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	RoHS CE	144
TD321/521D485H	Single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	200kbps	RoHS CE	144
TD321/521D485H-A	Single RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	500kbps	RoHS CE	144
TD321/521D485H-E	Single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45, 4.75-5.25VDC	500kbps	RoHS CE	144
TD322/522D485H-A	Dual channel RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	120kbps	RoHS CE	144
TD321/521S485	Cost-effective SMD single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	RoHS CE	144
TD321/521S485H	SMD single high-rate RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	200kbps	RoHS CE	144
TD321/521S485H-A	SMD single RS485 isolated transceiver module(automatic switching)	3.15-3.45, 4.75-5.25VDC	500kbps	RoHS CE	144
TD321/521S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45, 4.75-5.25VDC	500kbps	RoHS CE	144
TD301/501M485	Single high-rate compact size RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	500kbps	RoHS CE	144
TDH301/501D485H	Single high-rate high isolation RS485 isolated transceiver module	3.17-3.45, 4.75-5.25VDC	115.2Kbps	RoHS CE	144
TD321/521D485-L	Low power consumption single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2kbps	RoHS CE	144
TD321/521DCAN	Single universal CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	5k-1Mbps	RoHS CB CE	146
TD321/521DCANH	Single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	RoHS CE	146
TD321/521SCAN	SMD single universal CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	5k-1Mbps	RoHS CE	146
TD321/521SCANH	SMD single high-rate CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	RoHS CE	146
TD322/522DCAN	Dual channel CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	RoHS CE	146
TD301/501MCAN	Single high-rate compact size CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-1Mbps	RoHS CE	146
TD301/501MCANFD	Single high-rate compact size CANFD isolated transceiver module	3.15-3.45, 4.75-5.25VDC	40k-5Mbps	RoHS CE	146
TD301/501DCANHE	High surge protective CAN isolated transceiver module	3.15-3.45, 4.75-5.25VDC	20k-1Mbps	RoHS CE	146
TD302/502D232H	Dual channel high-rate RS232 isolated transceiver module	3.0-3.6, 4.5-5.5VDC	0-115.2kbps	RoHS	149
TLAxx-03K485	Integrated isolated 485 AC/DC power supply	85-305VAC/100-430VDC	500kbps	RoHS CE	148
TLAxx-03KCAN	Integrated isolated CAN AC/DC power supply	85-305VAC/100-430VDC	5-1000kbps	RoHS CE	148
TLAxx-03K485L	Integrated isolated 485 AC/DC power supply	85-305VAC/100-430VDC	19.2kbps	RoHS CE	148

• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Recommended Product Line for Applications

Series	Function	Input Signal	Output Signal	Isolation	Certification	Page
TN_T	SMD signal self-driving module	0-2.5V,0-5V,0-10mA	0/4-10mA,0-2.5/5/10V	2500VDC	RoHS CE	150
TE_N	Active module	0-5V,0-10V,4-20mA	0-5V,0-10V	2000VAC	RoHS CE	151
TE_T	Active high precision positive signal	4-20mA,0-5V	0-5V,0-5V	2000VAC	RoHS	152
TE_AN	Active module positive and negative signal	±5V,±10V	0-5V,0-10V	2000VAC	RoHS CE	151
TE_CN	Active module positive and negative signal	±5V,±10V	±5V,±10V	2000VAC	RoHS CE	151
TEM_AN	Active, mV-class, positive and negative signal	±75mV/±100mV	0-5V	2000VAC	RoHS CE	151
TEM_CN	Active, mV-class, positive and negative signal	±50mV/±100mV/±200mV	±5V/±10V	2000VAC	RoHS CE	151
TF_N	Active module	0-5V,0-10V	0/4-20mA,0-5V,0-10V	2000VAC	RoHS CE	153
TF_GN	Active module	0-5V	±10V	2000VAC	RoHS CE	153
TFW_N	Active high precision PWM signal	PWM signal 0-100%	0-20mA,0-10V	2000VAC	RoHS CE	153
T_P	Active module	0/4-20mA,0-5V,0-10V	0/4-20mA,0-5V,0-10V	2500VDC	RoHS	154
T_CP	Active high precision signal	±5V,±10V	±5V/±10V,±20mA	2500VDC	RoHS	154
TM_P	Active high precision signal (mV-class)	0-10/20/30/50/75/100mV	0/4-20mA,0-5V,0-10V	2500VDC	RoHS	155
TM_CP	Active high precision signal (mV-class)	±10/±20/±50/±75/±100mV/±200mV	±5V/±10V	2500VDC	RoHS	155
T1100N	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	156
T1100L	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	156
T1100L-F	Passive module(loop power supply)	4-20mA	4-20mA	3000VDC	RoHS CE	156
T_HL	Two-wire self-powered module with HART	0-2.5V	3.7-22mA	2000VAC	RoHS CE	156
T_L	Two-wire loop power supply	0-2.5V	3.7-22mA	2000VAC	RoHS CE	156
TRP_P	RTDs detection type isolated module	Pt100(0-500°C)	4-20mA	2000VAC	RoHS CE	157
TE_HN	Active high precision high isolated detection type signal	0-5V	0-5V	4000VAC	RoHS	157

Instrumentation

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS CE CB	49
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS CE CB	49
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE CB	51
LD03-16B	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE CB	54
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE	51
B_LS-1WR2/B_LS-1WR3	1W	3,3,5,12,15,24VDC	3,3,5,9,12,15,24	RoHS CE CB	94
A_XT-1WR2/A_XT-1WR3	1W	3,3,5,12,15,24VDC	±5,±9,±12,±15,±24	RoHS CE	96
B_XT-1WR2/B_XT-1WR3	1W	3,3,5,12,15,24VDC	3,3,5,6,9,12,15,24	RoHS CE	96
A_S-2WR2	2W	5,12,15,24VDC	±3,3,±5,±9,±12,±15	RoHS CE	98
B_S-2WR2	2W	5,12,15,24VDC	3,3,5,9,12,15,24	RoHS CE	98
TLAxx-03K485	3W	85-305VAC/100-430VDC	3,3,5	RoHS CE	106
TLAxx-03KCAN	3W	85-305VAC/100-430VDC	3,3,5	RoHS CE	106

Electric Power Industry

TLS-CB & PV Inverter & Wind Energy Converter & UHV Power Transmission & SVG

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
PV05/10/15-27BxxR2	5W,10W,15W	100-1000	5,9,12,15,24	RoHS CE	83
PV40-27B	40W	200-1200	12,15,24	RoHS	84
PV45-29D	45W	150-1500	12,15,24 double outputs available	RoHS	85
PV15/40-29B	10W,15W,40W	200-1500	5,12,15,24	RoHS CE CB	84
PV15-29BxxL	10W,15W	200-1500	5,12,15,24	RoHS	84

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Recommended Product Line for Applications

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
PV120-27B	120W	200-1100	12,15,24,48	RoHS	87
PV200-27B	200W	200-1000	12,15,24,26,48	RoHS CE	87
PV200-29B	200W	300-1500	24,48	RoHS CE CB	88

Protective Relaying System

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5,±12,24	RoHS	65
G_S-2WR2	2W	5,12,15,24VDC	±5,±9,±12,±15	RoHS CE CB	92
H_S-2WR2	2W	5,12,15,24VDC	5,12,15	RoHS CE CB	92
LH10/15/25-10B/DxxER2	10W,15W,25W	85-264VAC/100-370VDC	5,12,15,24	RoHS CE CB	71
LO10-26D0512-04L	10.92W	57-528VAC/80-745VDC	5.1,12	RoHS	70

Intelligent Surveillance System

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
E_XT-1WR2/E_XT-1WR3	1W	3,3,5,12,15,24	±5,±9,±12,±15,±24	RoHS CE CB	96
F_XT-1WR2/1WR3/2WR2	1W, 2W	3,3,5,12,15,24	3,3,5,9,12,15,24	RoHS CE CB	96,100
E_S-1WR2/1WR3/2WR2	1W, 2W	3,3,5,9,12,15,24	±3,±5,±9,±12,±15,±24	RoHS CE CB	95,98
F_S-1WR2/1WR3/2WR2	1W, 2W	3,3,5,9,12,15,24	3,3,5,9,12,15,24	RoHS CE CB	95,98
WRE_S-1WR2/3WR2	1W,3W	4.5-9.9-18,18-36,36-75	±5,±9,±12,±15	RoHS CE	107,113
WRF_S-1WR2/3WR2	1W,3W	4.5-9.9-18,18-36,36-75	3,3,5,9,12,15,24	RoHS CE	107,113

Smart Home

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS CE CB	49
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS CE CB	49
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE CB	51
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE	51
LS05-13BxxSR2S(-F)	5W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS CE CB	49
LSF01-K5BxxSS	1W	15-380VDC	Vo1/Vo2: 12.5/5	RoHS	50
LSC20-20M	11.55W,15.5W,20W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS	53
LDE05-23B	5W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS CE CB	56
LD03-16B	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE CB	54
LO10-24B	6.6W	30-280VAC/30-400VDC	5,12,13	RoHS	69
LO10-26D0512-04L	10.92W	57-528VAC/80-745VDC	5.1,12	RoHS	70

Distribution Network Automation

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URF_LP-10WR3	10W	9-36,18-75	3,3,5,9,12,15,24	RoHS CE CB	124
URF_LP-20WR3	20W	9-36,18-75	3,3,5,9,12,15,24	RoHS CE CB	127
URD_S-3WR3	3W	18-75	5/5,5/12,5/24	RoHS CE	135
URD_YMD-10WR3	10W	18-75	5/5,5/12,5/24	RoHS CE	135
URD_LD-20WR3	20W	18-75	5/5,5/12,5/24	RoHS CE	135
URD_D-30WR3	30W	18-75	5/24	RoHS CE	135

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Recommended Product Line for Applications



Communication

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URA_YMD-6WR3	6W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE CB	132
URB_YMD-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	132
URF_P-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	121
URA_YMD-10WR3	10W	9-36,18-75	±5, ±9, ±12, ±15, ±24	RoHS CE CB	124
VRB_LD-15WR3	15W	18-36,36-75	3.3,5,12,15,24	RoHS CE CB	127
URA_LD-20WR3	20W	9-36,18-75	±5, ±9, ±12, ±15	RoHS CE CB	127
URF_LP-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	127
URB_LD-30WR3	30W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE CB	129
VCB_SO-3WR3/6WR3/10WR3	3W,6W,10W	36-75	5,12,15,24	RoHS CE	117

Series	Output Current	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
K12T-6A-P(N)	6000	8.3-14	0.75-5.5	RoHS CE	105
K12T-10A/16A	10000/16000	8.3-14	0.75-5.5	RoHS CE	105



Transportation



OBU

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URB1D-YMD-6WR3	6W	40-160	5,12,15,24	RoHS CE	132
URB1D-LMD-10WR3/15WR3/20WR3	10W,15W,20W	40-160	3.3,5,12,15,24	RoHS	132
URF1D_QB-50W/75W/100WR3	50W,75W,100W	43-160	3.3,5,12,15,24,48	RoHS	133
URF1D_HB-150WR3	150W	43-160	5,12,15,24,48	RoHS	133
URF1D_HB-250WR3	250W	40-160	5,12,15,24,48,54	RoHS	133



Railway Auxiliary Device

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
IF_S-1W/IF_S-1WR3	1W	5,12,15VDC	3.3,5,9,12,15	RoHS CE CB	101
WRF_S-3WR2	3W	4.5-9,9-18,18-36,36-75VDC	3.3,5,9,12,15,24	RoHS CE	107
URF_LP-10WR3	10W	9-36,18-75VDC	3.3,5,9,12,15,24	RoHS CE CB	124
URF_LP-20WR3	20W	9-36,18-75VDC	3.3,5,9,12,15,24	RoHS CE CB	127
LHE_20B	5W,10W,15W,20W,25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	61



Electric Vehicle--Motor Drive

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (typ)	Isolation	Certification	Page
CWRF_S-3W	3W	7-18	15	200	82	4300VDC	RoHS	114
CF_XT-1WR3	1W	4.5-5.5	5	200	78	3500VDC	RoHS CE	89
CFB_XT-1WR3	1W	4.5-5.5	5	200	82	4200VDC	RoHS CE	89

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Recommended Product Line for Applications

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (typ)	Isolation	Certification	Page
CUWB_YMD-6WR3	6W	4.5-36	3.3,5,12,15,24	/	85	1500VDC	RoHS CE	114
CVRC1215JD-6WR3	6W	9-18	15/15/15	200/100/100	82	3000VDC	RoHS CE	115

Series	Function	Power Supply	Data Rate	Nodes	Certification	Page
CTD331/531SCANH	Automotive SMD single high-rate CAN isolated transceiver module	3.15-3.45,4.75-5.25VDC	40K-1Mbps	110	RoHS CE	104

Series	Power (W)	Input Voltage Range(VDC)	Output Voltage (VDC)	output channels	Isolation	Package	Bobbin	Control Mode	Certification	Page
CTTFB-1T	1	4.5-5.5	5	1	3000VAC/4250VDC	SMD	/	push-pull	RoHS	182
CTTF-1T	1	4.5-5.5	5	1	3000VDC	SMD	/	push-pull	RoHS	182
CTTURB-6T	6	9-36	5	1	1650VDC	SMD	ER11.5	flyback	RoHS	181
CTTURA-10T	10	9-36,18-75	±5, ±15	2	1650VDC	SMD	ER11.5	flyback	RoHS	181
CTTURB-10T	10	9-36,18-75	5	1	1650VDC	SMD	ER11.5	flyback	RoHS	181
CTTURB-20T	20	9-36	5	1	1650VDC	SMD	ER14.5	flyback	RoHS	181



Charging Station

Series	Power/Function	Input Voltage Range/ Input Voltage	Output Voltage/ Data Rate	Certification	Page
LS03/05-15BxxSS(-F)	3W,5W		85-264VAC/100-400VDC	RoHS CE CB	49
LO20-10C0512-01	18.7W		165-264VAC/230-370VDC	RoHS	70
LO30-10C0512-12	31.2W		85-264VAC/100-370VDC	RoHS	70
LH05/10/15/20/25-10A/BXXX	5W,10W,15W,20W,25W		85-264VAC/100-370VDC	RoHS CE CB	59
LM30-00J0512-03E	30W		85-264VAC/100-370VDC	RoHS	65
A_S-1WR2/A_S-1WR3	1W		3.3,5,9,12,15,24VDC	RoHS CE	94
F_S-1WR2/F_S-1WR3	1W		3.3,5,9,12,15,24VDC	RoHS CE	95
WRB_S-3WR2	3W		4.5-9,9-18,18-36VDC	RoHS CE	110
URB_YMD-6WR3	6W		9-36,18-75VDC	RoHS CE CB	121
TD321/521D485H	Single high-rate RS485 isolated transceiver module		3.15-3.45,4.75-5.25VDC	RoHS CE	144
TD321/521S485H	SMD single high-rate RS485 isolated transceiver module		3.15-3.45,4.75-5.25VDC	RoHS CE	144
TD331/531S485H	SMD single high-rate RS485 isolated transceiver module		3.15-3.45,4.75-5.25VDC	RoHS CE	143
TD331/531S485H-A	SMD single RS485 isolated transceiver module(automatic switching)		3.15-3.45,4.75-5.25VDC	RoHS CE	143
TD331/531S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)		3.15-3.45,4.75-5.25VDC	RoHS CE	143
TD321/521S485H-A	SMD single RS485 isolated transceiver module(automatic switching)		3.15-3.45,4.75-5.25VDC	RoHS CE	144
TD321/521S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)		3.15-3.45,4.75-5.25VDC	RoHS CE	144
TD321/521DCANH	single high-rate CAN isolated transceiver module		3.3,5.5VDC	RoHS CE	146
TD321/521SCANH	SMD single high-rate CAN isolated transceiver module		3.3,5VDC	RoHS CE	146
TD331/531SCANH	SMD single high-rate CAN isolated transceiver module		3.15-3.45,4.75-5.25VDC	RoHS CE	143



Lighting

Series	Input Voltage Range (VDC)	Output Voltage (VDC)	Output Current (mA)	Certification	Page
KC24H-1000	5.5-48	3.3-36	1000	RoHS	162
KC24H-1200	5.5-48	3.3-36	1200	RoHS	162
KC24H-R	5.5-46	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	162
KC24W	5.5-48	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	162
KC24RT	5.5-48	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	162
KC24JT	6-36	3.3-36	300,700	RoHS	163

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Recommended Product Line for Applications



IOT(Internet of Things)

Series	Power/Output Current	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS CE CB	49
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3.3,5,9,12,15,24	RoHS CE CB	49
LS01-K3B05SS	1W	85-305VAC/70-430VDC	5	RoHS CE	50
LS03-K3B12SS	3W	85-305VAC/70-430VDC	12	RoHS CE	50
LDE02-23B	2W	85-305VAC/120-430VDC	3.3,5,9,12,15,24	RoHS CE CB	56
LDE03-20B	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	55
LDE03-20B-W	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	57
LDE03-20B-0	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE (pending)	55
LDE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	57
LDE05-20B-W	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	57
LDE06-20B	6W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	57
LDE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	57
B_XT-1WR2/B_XT-1WR3	1W	3.3,5,12,15,24VDC	3.3,5,6,9,12,15,24	RoHS CE	96
K78(L)-500R3	500/-300/-150mA	4.75-36VDC	3.3,5,-5,9,-12,12,-15,15	RoHS CE CB	103
K78(L)-1000R3(L)	1000/-500/-300mA	6-36VDC	3.3,5,-5,9,-12,12,-15,15	RoHS CE CB	103
K78-2000R3	2000mA	6-36VDC	3.3,5,9,12,15	RoHS CE	103
K78xxM-1000R3	1000/-500/-300mA	6-36VDC	3.3,5,9,12,15,-5,-12,-15	RoHS CE	103
K78T-500R3	500mA	4.75-36VDC	1.5,1.8,2.5,3.3,5,6,5,9,12,15	RoHS CE	103
K78T-1000R3	1000/800mA	4.75-36VDC	1.5,1.8,2.5,3.3,5,6,5,9,12	RoHS CE	103

Series	Function	Input Voltage Range (VDC)	Data Rate	Certification	Page
TD321/521DCANH	Single high-rate CAN isolated transceiver module	3.15-3.45,4.75-5.25	40k-1Mbps	RoHS CE	146
TD331/531SCANH	SMD single high-rate CAN isolated transceiver module	3.15-3.45,4.75-5.25	40k-1Mbps	RoHS CE	143
TD331/531S485H	SMD single high-rate RS485 isolated transceiver module	3.15-3.45,4.75-5.25	150kbps	RoHS CE	143
TD331/531S485H-A	SMD single RS485 isolated transceiver module(automatic switching)	3.15-3.45,4.75-5.25	150kbps	RoHS CE	143
TD331/531S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45,4.75-5.25	500kbps	RoHS CE	143
TD321/521D485H	Single high-rate RS485 isolated transceiver module	3.15-3.45,4.75-5.25	40k-1Mbps	RoHS CE	144
TD321/521D485H-A	Single RS485 isolated transceiver module(automatic switching)	3.15-3.45,4.75-5.25	200kbps	RoHS CE	144
TD321/521D485H-E	Single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45,4.75-5.25	500kbps	RoHS CE	144
TD321/521S485H	SMD single high-rate RS485 isolated transceiver module	3.15-3.45,4.75-5.25	200kbps	RoHS CE	144
TD321/521S485H-A	SMD single RS485 isolated transceiver module(automatic switching)	3.15-3.45,4.75-5.25	500kbps	RoHS CE	144
TD321/521S485H-E	SMD single high-rate RS485 isolated transceiver module(enhanced)	3.15-3.45,4.75-5.25	500kbps	RoHS CE	144
TLAxx-03K485	Integrated isolated 485 AC/DC power supply	85-305VAC/100-430VDC	500kbps	RoHS CE	148
TLAxx-03KCAN	Integrated isolated CAN AC/DC power supply	85-305VAC/100-430VDC	5-1000kbps	RoHS CE	148
TLAxx-03K485L	Integrated isolated 485 AC/DC power supply	85-305VAC/100-430VDC	19.2kbps	RoHS CE	148

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Recommended Product Line for Applications



White Goods

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LD03-20BxxWG	3W	85-264VAC/120-373VDC	5,15,24	RoHS CE	55
LO15-10B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS CE CB	67
LO30-10B	30W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	RoHS CE CB	67
LS08-13BxxSS(-F)	8W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE CB	49
LS10-13BxxSS(-F)	10W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS CE CB	49



Medical

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
G_S-1W/2WR2	1W,2W	5,12,15,24VDC	±5,±9,±12,±15	RoHS CE	92
H_S-1W/2WR2	1W,2W	3.3,5,12,24VDC	3.3,5,12,15	RoHS CE CB	92
URH_P-6WR3	6W	9-36,18-75VDC	5,6,9,12,15,24	RoHS CE	118
LD05-20BxxMU	5W	85-264VAC/100-370VDC	5,12,15,24	RoHS CE	65
LD08-20BY4-US	7.6W	85-264VAC/100-370VDC	3.8	RoHS CE	65
LH15-20BxxMU	15W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS CE CB	66
LH25-20BxxMU	25W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS CE CB	66

Series	Input Voltage Nominal (VDC)	Output Voltage Nominal (VDC)	Output Voltage Range(VDC)	Constant Current (mA)	Certification	Page
H01-P(N)1251H-0.5C(D/F)	12,15,24	+1250/-1250	0 to +1250 / 0 to -1250	0.5	RoHS	108
H01-P(N)1251V-0.5C(F)	12,24	+1250/-1250	0 to +1250 / 0 to -1250	0.5	RoHS	108
H01-P(N)1501H-0.5C(D)	12,15	+1500/-1500	0 to +1500 / 0 to -1500	0.5	RoHS	108



Mining Industry

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
PVA40-26B	40W	460-1500VAC	12,28,35	RoHS	81
PVA40-27B	40W	85-900VAC	18,24,30	RoHS	79
PVA70-27B	70W	85-900VAC	24,28,35	RoHS	79
PVA120-27B	120W	85-900VAC	28,35	RoHS	79
PVA120-27B-C	120W	85-900VAC	35	RoHS	79



Marine Engineering Device

Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Current (A)	Certification	Page
LI80-13C2412-10-ZX	77W	85-305VAC/100-430VDC	24/12/5	2.5/1.0/1.0	RoHS	77
LI120-10B24-ZX	120W	85-264VAC/100-370VDC	24	5	RoHS	77
LI150-13B29	150W	85-305VAC/100-430VDC	29	5.2	RoHS	77


• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Pin-Out Details

DC/DC Converter Pin-Out


GND	Input GND
+Vo	+Output
OV	Output GND
-Vo	-Output
DC(-Vin)	-Input
DC(+Vin)	+Input
Vadj	Voltage Adjustable
CTRL	ON/OFF Control Function
ON/OFF	ON/OFF Control, UVLO & Starting Time Delay Function
CS	With External Capacitance(Reduce Ripple)
Trim	Output Voltage Adjustable
-Sense	Voltage Output Remote Compensation(Output GND)
+Sense	Voltage Output Remote Compensation(Output+)
NC	No Electrical Connection
No Pin	No Pin

AC/DC Converter Pin-Out

AC(N)	Neutral Wire
AC(L)	Live Wire
-Vo	-Output
+Vo	+Output
Trim	Output Voltage Adjustable
COM	Common
	GND Protection
+V(CAP)	+External Capacitance
-V(CAP)	-External Capacitance
NC	No Electrical Connection
No Pin	No Pin

Isolation Transmitter Module Pin-Out

Pin+	Power Supply+
Pin-	Power Supply-
Pout+	Isolated Output+
Pout-	Isolated Output-
Pgnd	Isolated Output GND
Vo	Output
+Piss	+Isolated Power, Output
-Piss	-Isolated Power, Output
FB	Input Feedback
Ocom	Output Common
Icom	Input Common
Pin com/GND	Power Common
Iout	Current Output
Iin	Current Input
Sin+	Signal Input+
Sin-	Signal Input-
Sout+	Signal Output+
Sout-	Signal Output-
+Piss	+Isolated Power, Input
-Piss	-Isolated Power, Input
-IN	-Input
+IN	+Input
Pin	Power supply
Adj	Gain Adjustable
GR	Gain auxiliary regulation
SG	Gain regulation
ZR	Zero auxiliary regulation
SZ	Zero regulation



AC/DC Enclosed

1. ≤ 50 W AC/DC enclosed switching power supply39
2. 75W AC/DC enclosed switching power supply.....40
3. 100W AC/DC enclosed switching power supply.....42
4. 150W AC/DC enclosed switching power supply.....43
5. 200W AC/DC enclosed switching power supply.....44
6. 350W AC/DC enclosed switching power supply.....45
7. 75-320W AC/DC enclosed switching power supply(with PFC).....46


These series are suitable for industrial indoor/outdoor environment

≤ 50W AC/DC Enclosed switching power supply



Features

- Input voltage: 85-264VAC/120-373VDC
165-264VAC/180-373VDC
- Single output / dual outputs / triple outputs
- 3-proof customization is available
- Withstand 300VAC surge input for 5s
- Operating temperature: -30°C to +70°C
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards

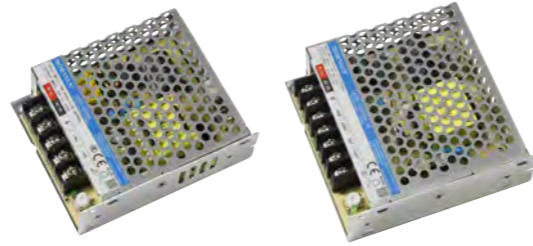


Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current			Effi.(%) (typ)	Certification
			(Vo1/Io1)	(Vo2/Io2)	(Vo3/Io3)		
LM35-20B05	35W	85-264VAC 120-373VDC	5V/7A	/	/	82	CE RoHS
LM35-20B12	36W	85-264VAC 120-373VDC	12V/3A	/	/	86	
LM35-20B15		85-264VAC 120-373VDC	15V/2.4A	/	/	87	
LM35-20B24		85-264VAC 120-373VDC	24V/1.5A	/	/	88	
LM35-22B05	35W	165-264VAC 180-373VDC	5V/7A	/	/	82	CE RoHS
LM35-22B12	36W	165-264VAC 180-373VDC	12V/3A	/	/	86	
LM35-22B15		165-264VAC 180-373VDC	15V/2.4A	/	/	87	
LM35-22B24		165-264VAC 180-373VDC	24V/1.5A	/	/	88	
LM35-10C051212-10	33W	85-264VAC 120-373VDC	+5V/3.0A	+12V/1.0A	-12V/0.5A	81	CE RoHS
LM35-10C051515-10	35W	85-264VAC 120-373VDC	+5V/2.5A	+15V/1.0A	-15V/0.5A	81	
LM35-10C052412-05	36.5W	85-264VAC 120-373VDC	+5V/2.5A	+24V/0.5A	+12V/1.0A	81	
LM35-10D0512-10	32W	85-264VAC 120-373VDC	+5V/4.0A	+12V/1.0A	/	81	CE RoHS
LM35-10D0524-10	35W	85-264VAC 120-373VDC	+5V/2.2A	+24V/1.0A	/	83	
LM50-20B05	50W	85-264VAC 120-373VDC	5V/10A	/	/	83	CE RoHS
LM50-20B12	50.4W	85-264VAC 120-373VDC	12V/4.2A	/	/	86	
LM50-20B15	51W	85-264VAC 120-373VDC	15V/3.4A	/	/	88	
LM50-20B24	52.8W	85-264VAC 120-373VDC	24V/2.2A	/	/	88	
LM50-22B05	50W	165-264VAC 180-373VDC	5V/10A	/	/	83	CE RoHS
LM50-22B12	50.4W	165-264VAC 180-373VDC	12V/4.2A	/	/	86	
LM50-22B15	51W	165-264VAC 180-373VDC	15V/3.4A	/	/	87	
LM50-22B24	52.8W	165-264VAC 180-373VDC	24V/2.2A	/	/	88	
LM50-10C051212-20	50W	85-264VAC 120-373VDC	+5V/4.0A	+12V/2.0A	-12V/0.5A	81	CE RoHS
LM50-10C051515-15	50W	85-264VAC 120-373VDC	+5V/4.0A	+15V/1.5A	-15V/0.5A	83	
LM50-10C052412-10	51W	85-264VAC 120-373VDC	+5V/3.0A	+24V/1.0A	+12V/1.0A	85	
LM50-10D0512-20	54W	85-264VAC 120-373VDC	+5VDC/6.0A	+12V/2.0A	/	83	CE RoHS
LM50-10D0524-14	53.6W	85-264VAC 120-373VDC	+5VDC/4.0A	+24V/1.4A	/	84	

Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.


LM35-10Cxx/LM35-10Dxx: LxWxH: 99.00x97.00x30.00(mm)

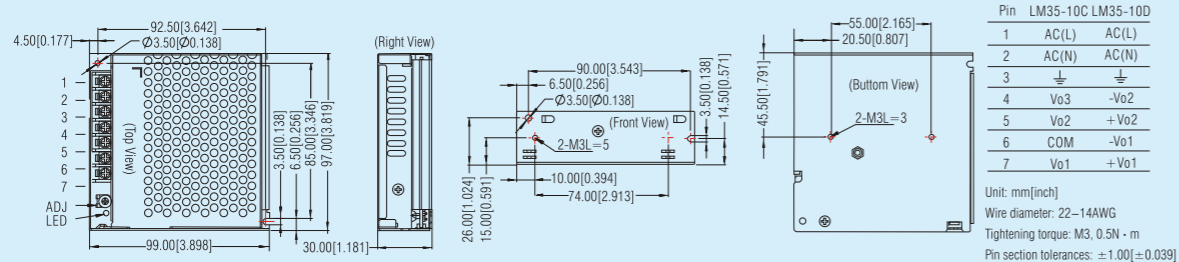

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Package Dimension

LM50-10Cxx/LM50-10Dxx: LxWxH: 99.00x97.00x30.00(mm)

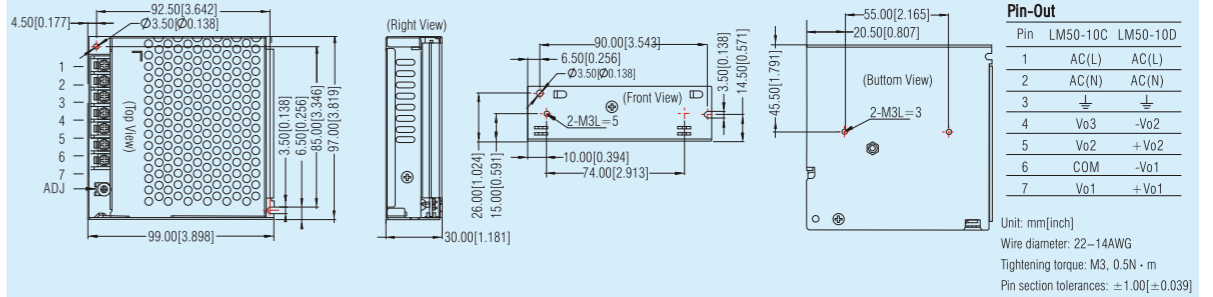

These series are suitable for industrial indoor/outdoor environment

75W AC/DC Enclosed switching power supply



Features

- Input voltage: 85-264VAC/120-373VDC
165-264VAC/200-373VDC
- Single output / dual outputs / triple outputs
- 3-proof customization is available
- Withstand 300VAC surge input for 5s
- Operating temperature: -30°C to +70°C
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards



Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current			Effi.(%) (typ)	Certification
			(Vo1/Io1)	(Vo2/Io2)	(Vo3/Io3)		
LM75-20B05	70W	85-264VAC 120-373VDC	5V/14A	/	/	86	CE RoHS
LM75-20B12	72W	85-264VAC 120-373VDC	12V/6A	/	/	88	
LM75-20B15	75W	85-264VAC 120-373VDC	15V/5A	/	/	88	
LM75-20B24	76.8W	85-264VAC 120-373VDC	24V/3.2A	/	/	90	
LM75-20B48	76.8W	85-264VAC 120-373VDC	48V/1.6A	/	/	91.5	CE RoHS
LM75-22B05	70W	165-264VAC 200-373VDC	5V/14A	/	/	86	
LM75-22B12	72W	165-264VAC 200-373VDC	12V/6A	/	/	88	
LM75-22B15	75W	165-264VAC 200-373VDC	15V/5A	/	/	88	
LM75-22B24	76.8W	165-264VAC 200-373VDC	24V/3.2A	/	/	90	CE RoHS
LM75-22B48	76.8W	165-264VAC 200-373VDC	48V/1.6A	/	/	91.5	
LM75-10C051212-28	69.6W	90-264VAC 120-373VDC	+5V/6.0A	+12V/2.8A	-12V/0.5A	82	
LM75-10C051515-23	72W	90-264VAC 120-373VDC	+5V/6.0A	+15V/2.3A	-15V/0.5A	82	
LM75-10C052412-15	73W	90-264VAC 120-373VDC	+5V/5.0A	+24V/1.5A	+12V/1.0A	84	CE RoHS
LM75-10D0512-30	71W	90-264VAC 120-373VDC	+5V/7.0A	+12V/3.0A	/	82	
LM75-10D0524-20	73W	90-264VAC 120-373VDC	+5V/5.0A	+24V/2.0A	/	84	

Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.


• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Package Dimension


LM75-10Cxx Series: LxWxH: 129.00x97.00x30.00(mm)

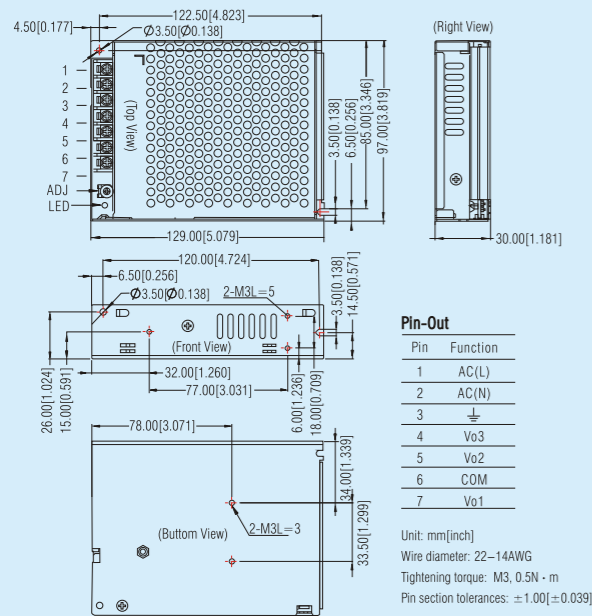

LM75-10Dxx Series: LxWxH: 129.00x97.00x30.00(mm)

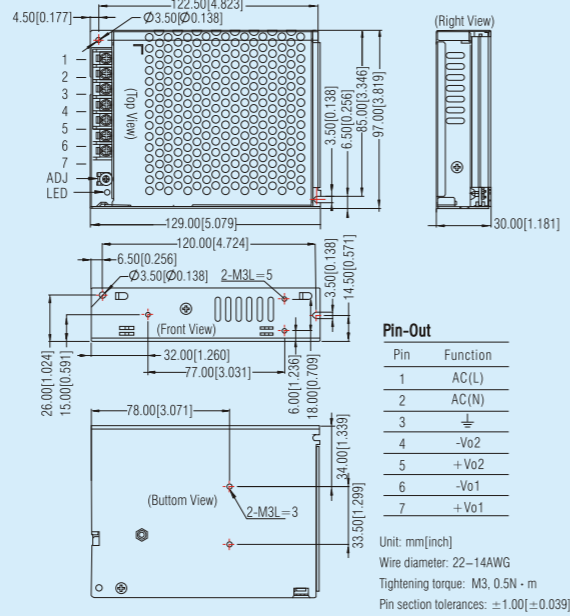

LM75-20Bxx/LM75-22Bxx Series: LxWxH: 99.00x97.00x30.00(mm)

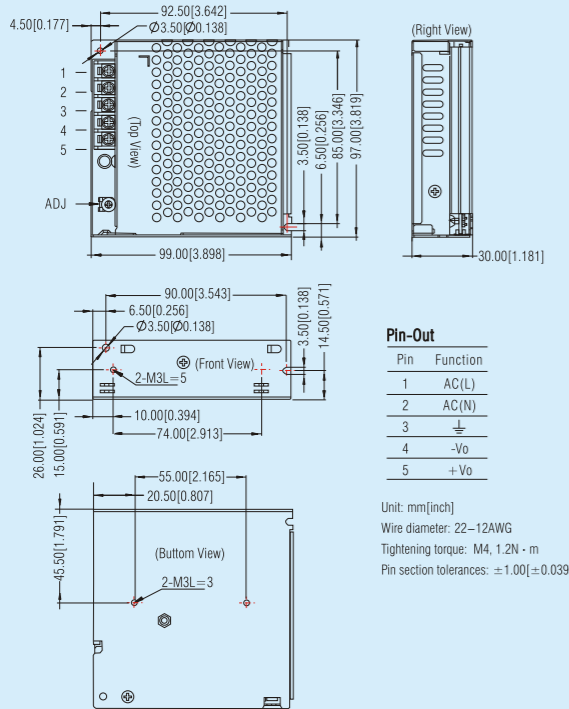


These series are suitable for industrial indoor/outdoor environment

100W AC/DC Enclosed switching power supply



Features

- Input voltage: 85-264VAC/120-373VDC, 165-264VAC/200-373VDC
- Single output / dual outputs / triple outputs
- 3-proof customization is available
- Withstand 300VAC surge input for 5s
- Operating temperature: -30°C to +70°C
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards

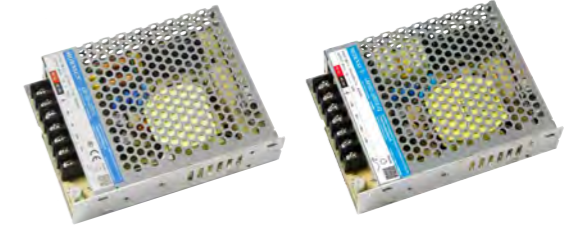


Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current			Effi.(%) (typ)	Certification
			(Vo1/Io1)	(Vo2/Io2)	(Vo3/Io3)		
LM100-20B05	90W	85-264VAC 120-373VDC	5V/1.8A			86	CE RoHS
LM100-20B12	102W	85-264VAC 120-373VDC	12V/8.5A			87.5	
LM100-20B15	105W	85-264VAC 120-373VDC	15V/7.0A			87.5	
LM100-20B24	108W	85-264VAC 120-373VDC	24V/4.5A			90	
LM100-20B36	100.8W	85-264VAC 120-373VDC	36V/2.8A			90	
LM100-20B48	110.4W	85-264VAC 120-373VDC	48V/2.3A			91	
LM100-22B05	90W	165-264VAC 200-373VDC	5V/1.8A			86	
LM100-22B12	102W	165-264VAC 200-373VDC	12V/8.5A			87.5	
LM100-22B15	105W	165-264VAC 200-373VDC	15V/7.0A			87.5	
LM100-22B24	108W	165-264VAC 200-373VDC	24V/4.5A			90	
LM100-22B36	100.8W	165-264VAC 200-373VDC	36V/2.8A			90	
LM100-22B48	110.4W	165-264VAC 200-373VDC	48V/2.3A			91	
LM100-10C051212-35	94W	90-264VAC 120-373VDC	+5V/8.0A	+12V/3.5A	-12V/1.0A	84	CE RoHS
LM100-10C051515-30	95W	90-264VAC 120-373VDC	+5V/7.0A	+15V/3.0A	-15V/1.0A	85	
LM100-10C052412-20	96W	90-264VAC 120-373VDC	+5V/6.0A	+24V/2.0A	+12V/1.5A	85	
LM100-10D0524-30	97W	90-264VAC 120-373VDC	+5V/5.0A	+24V/3.0A		85	
LM100-10D1224-20	96W	90-264VAC 120-373VDC	+12V/4.0A	+24V/2.0A		87	


Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.

Package Dimension

LM100-20Bxx/LM100-22Bxx Series: LxWxH: 129.00x97.00x30.00(mm)

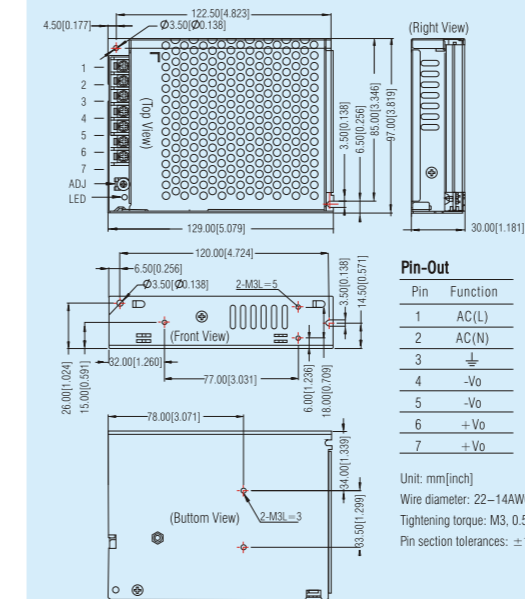

LM100-10Cxx/LM100-10Dxx Series: LxWxH: 159.00x97.00x30.00(mm)

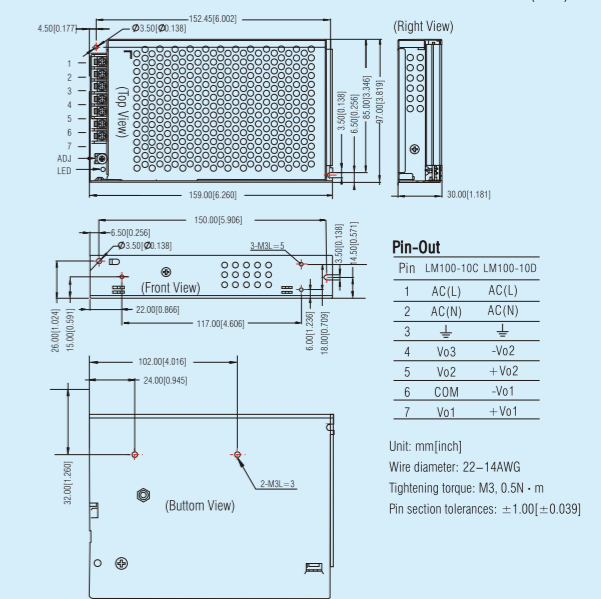

These series are suitable for industrial indoor/outdoor environment

150W AC/DC Enclosed switching power supply



Features

- Input voltage: 85-264VAC/120-373VDC, 165-264VAC/180-373VDC
- Single output
- 3-proof customization is available
- Withstand 300VAC surge input for 5s
- Operating temperature: -30°C to +70°C
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io1)	Effi(%) (typ)	Certification
LM150-20B12	150W	85-264VAC 120-373VDC	12V/12.5A	86	CE CCC RoHS
LM150-20B15	150W	85-264VAC 120-373VDC	15V/10A	87	
LM150-20B24	156W	85-264VAC 120-373VDC	24V/6.5A	88	
LM150-20B36	154.8W	85-264VAC 120-373VDC	36V/4.3A	88	
LM150-20B48	158.4W	85-264VAC 120-373VDC	48V/3.3A	89	CE CCC RoHS
LM150-22B12	150W	165-264VAC 180-373VDC	12V/12.5A	86	
LM150-22B15	150W	165-264VAC 180-373VDC	15V/10A	87	
LM150-22B24	156W	165-264VAC 180-373VDC	24V/6.5A	88	
LM150-22B36	154.8W	165-264VAC 180-373VDC	36V/4.3A	88	
LM150-22B48	158.4W	165-264VAC 180-373VDC	48V/3.3A	89	

Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.

Package Dimension

LM150-20Bxx/LM150-22Bxx Series: LxWxH: 159.00x97.00x30.00(mm)

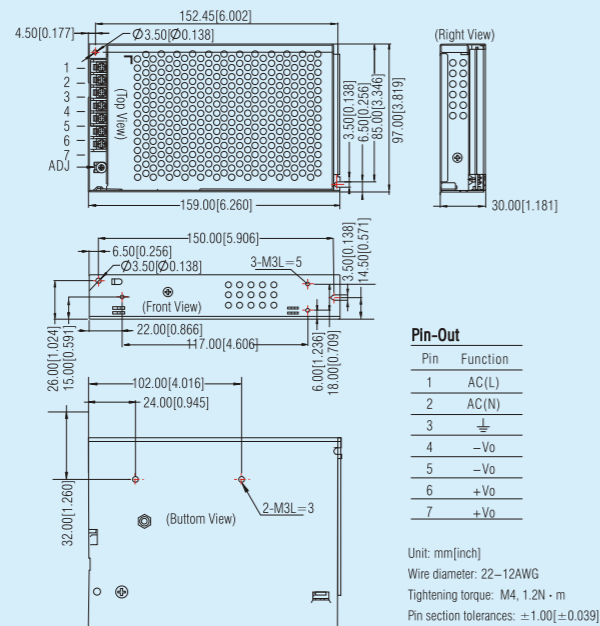

• This catalog is used to introduce our latest products, for more information, please contact our sales department

These series are suitable for industrial indoor/outdoor environment

200W AC/DC Enclosed switching power supply



Features

- Selectable AC input range: 90-132VAC/180-264VAC(LM200-10Bxx)
176-264VAC(LM200-12Bxx)
- DC input range: 240-373VDC(Switch in position of 230)
- Single output
- 3-proof customization is available
- Withstand 300VAC surge input for 5s
- Operating temperature: -30°C to +70°C
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io1)	Effi(%) (typ)	Certification
LM200-10B05	200W	90-132VAC 180-264VAC	5V/40A	87	CE CCC RoHS
LM200-10B12	204W	90-132VAC 180-264VAC	12V/17A	87.5	
LM200-10B15	210W	90-132VAC 180-264VAC	15V/14A	88	
LM200-10B24	211.2W	90-132VAC 180-264VAC	24V/8.8A	88.5	
LM200-10B36	212.4W	90-132VAC 180-264VAC	36V/5.9A	89	CE CCC RoHS
LM200-10B48	211.2W	90-132VAC 180-264VAC	48V/4.4A	89.5	
LM200-12B05	200W	176-264VAC 240-373VDC	5V/40A	87	
LM200-12B12	204W	176-264VAC 240-373VDC	12V/17A	87.5	
LM200-12B15	210W	176-264VAC 240-373VDC	15V/14A	88	
LM200-12B24	211.2W	176-264VAC 240-373VDC	24V/8.8A	88.5	CE CCC RoHS
LM200-12B36	212.4W	176-264VAC 240-373VDC	36V/5.9A	89	
LM200-12B48	211.2W	176-264VAC 240-373VDC	48V/4.4A	89.5	

Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.

Package Dimension

LM200-10Bxx/LM200-12Bxx Series: LxWxH: 179.00x99.00x30.00(mm)

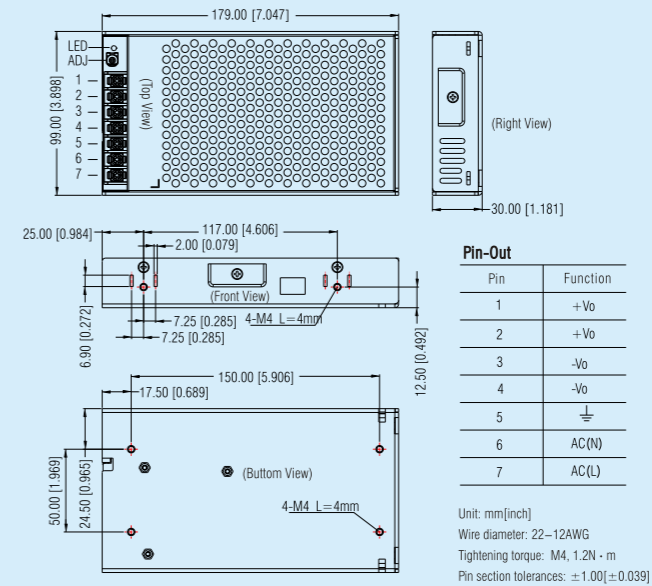

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

These series are suitable for industrial indoor/outdoor environment

350W AC/DC Enclosed switching power supply



Features

- Selectable AC input range: 90-132VAC/180-264VAC(LM350-10Bxx)
176-264VAC(LM350-12Bxx)
- DC input range: 240-373VDC(switch in position of 230)
- Single output
- 3-proof customization is available
- Withstand 300VAC surge input for 5s
- Operating temperature: -30°C to +70°C
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards




Product Program					
Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io1)	Effi(%) (typ)	Certification
LM350-10B05	300W	90-132VAC 180-264VAC	5V/60A	83.5	CE CQC RoHS
LM350-10B12	348W	90-132VAC 180-264VAC	12V/29A	85	
LM350-10B15	348W	90-132VAC 180-264VAC	15V/23.2A	86	
LM350-10B24	350.4W	90-132VAC 180-264VAC	24V/14.6A	87	
LM350-10B36	349.2W	90-132VAC 180-264VAC	36V/9.7A	88	
LM350-10B48	350.4W	90-132VAC 180-264VAC	48V/7.3A	88.5	CE CQC RoHS
LM350-12B05	300W	176-264VAC 240-373VDC	5V/60A	84	
LM350-12B12	348W	176-264VAC 240-373VDC	12V/29A	85.5	
LM350-12B15	348W	176-264VAC 240-373VDC	15V/23.2A	87.5	
LM350-12B24	350.4W	176-264VAC 240-373VDC	24V/14.6A	87	
LM350-12B36	349.2W	176-264VAC 240-373VDC	36V/9.7A	88	CE CQC RoHS
LM350-12B48	350.4W	176-264VAC 240-373VDC	48V/7.3A	89	

Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.

Package Dimension

LM350-10Bxx/LM350-12BxxSeries: LxWxH: 215.00x115.00x30.00(mm)

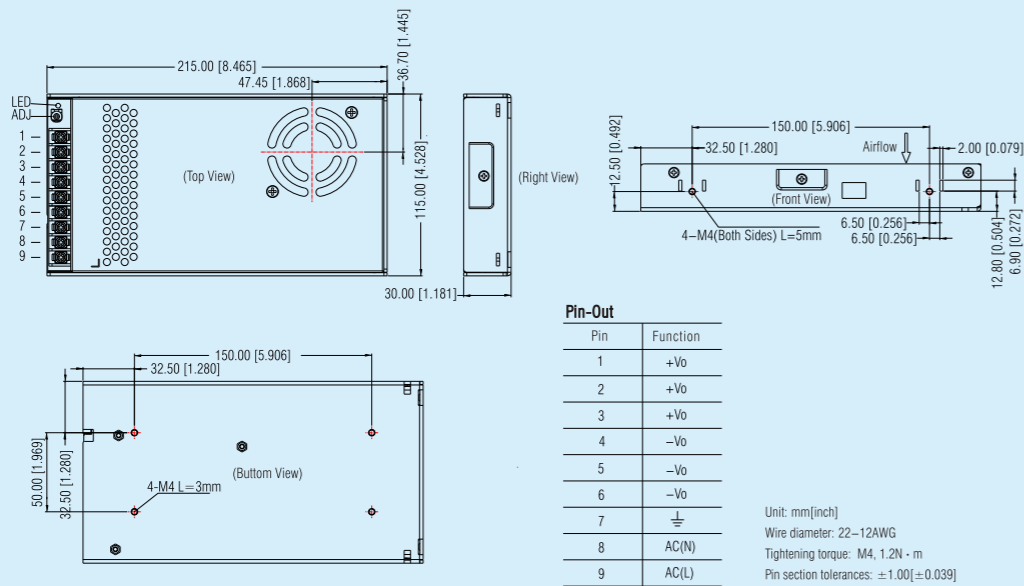

• This catalog is used to introduce our latest products, for more information, please contact our sales department

These series are suitable for industrial indoor/outdoor environment

75-320W AC/DC Enclosed switching power supply(with PFC)



Features

- Input voltage: 85-264VAC/120-373VDC
- Operating temperature: -30°C to +70°C
- Isolation: 4000VAC
- Withstand 300VAC surge input for 5s
- Built-in active PFC function
- Remote on-off control
- Output short circuit, over-current, over-voltage, over-temperature protections
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Meet IEC/UL/EN62368, EN60335, GB4943 standards




Product Program					
Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io1)	Effi(%) (typ)	Certification
LMF75-20B05	75W	85-264VAC 120-370VDC	5V/15A	82	CE CCC (pending) RoHS
LMF75-20B12	75.6W	85-264VAC 120-370VDC	12V/6.3A	85	
LMF75-20B15	75W	85-264VAC 120-370VDC	15V/5A	86	
LMF75-20B24	76.8W	85-264VAC 120-370VDC	24V/3.2A	87	
LMF75-20B48	76.8W	85-264VAC 120-370VDC	48V/1.6A	89	CE CCC (pending) RoHS
LMF100-20B05	100W	85-264VAC 120-373VDC	5V/20A	86	
LMF100-20B12	102W	85-264VAC 120-373VDC	12V/8.5A	86	
LMF100-20B15	100.5W	85-264VAC 120-373VDC	15V/6.7A	87	
LMF100-20B24	100.8W	85-264VAC 120-373VDC	24V/4.2A	87	CE CCC (pending) RoHS
LMF100-20B48	100.8W	85-264VAC 120-373VDC	48V/2.1A	88	
LMF150-20B05	150W	85-264VAC 120-373VDC	5V/30A	87	
LMF150-20B12	150W	85-264VAC 120-373VDC	12V/12.5A	88	
LMF150-20B15	150W	85-264VAC 120-373VDC	15V/10A	88.5	CE CCC (pending) RoHS
LMF150-20B24	151.2W	85-264VAC 120-373VDC	24V/6.3A	89	
LMF150-20B48	153.6W	85-264VAC 120-373VDC	48V/3.2A	90	

Note: Conformal coating(series with suffix "-C") is acceptable, terminal cover(series with suffix "-Q") is optional.

Package Dimension



LMF75-20Bxx Series: LxWxH: 159.00x97.00x30.00(mm)

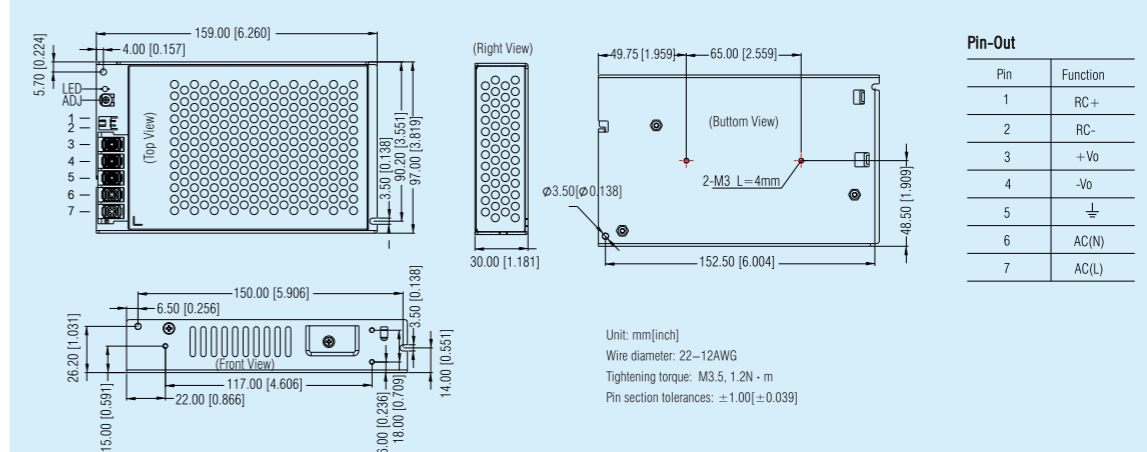

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Package Dimension

LMF100/LMF150-20Bxx Series: LxWxH: 179.00x99.00x30.00(mm)


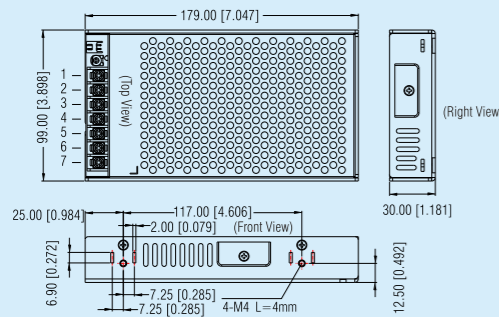


Pin-Out

Pin	LMF100	LMF150
1	+Vo	DC OUTPUT +V
2	+Vo	DC OUTPUT +V
3	-Vo	DC OUTPUT -V
4	-Vo	DC OUTPUT -V
5	⏏	FG ⏏
6	AC(N)	AC/L
7	AC(L)	AC/L

Unit: mm[inch]
Wire diameter: 22-12AWG
Tightening torque: M4, 1.2N·m
Pin section tolerances: ±1.00[±0.039]

LMF200-20Bxx Series: LxWxH: 215.00x115.00x30.00(mm)

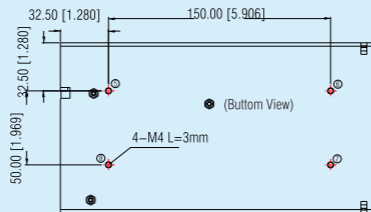
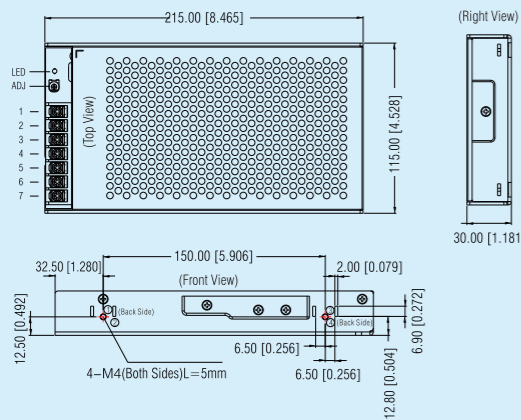


Pin-Out

Pin	Function
1	+Vo
2	+Vo
3	-Vo
4	-Vo
5	⏏
6	AC(N)
7	AC(L)

Unit: mm[inch]
Wire diameter: 22-12AWG
Tightening torque: M4, 1.2N·m
Pin section tolerances: ±1.00[±0.039]
①-⑧ any position must be connected to PE

LMF320-20Bxx Series: LxWxH: 215.00x115.00x30.00(mm)

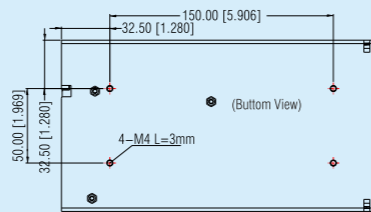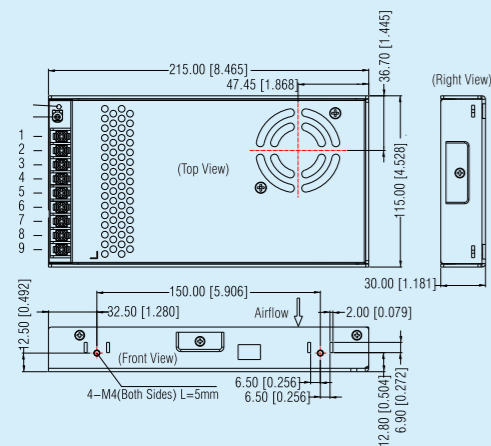

Pin-Out

Pin	Function
1	+Vo
2	+Vo
3	+Vo
4	-Vo
5	-Vo
6	-Vo
7	⏏
8	AC(N)
9	AC(L)

Unit: mm[inch]
Wire diameter: 22-12AWG
Tightening torque: M4, 1.2N·m
Pin section tolerances: ±1.00[±0.039]

• This catalog is used to introduce our latest products, for more information, please contact our sales department

AC/DC Converter

- 1 These series are suitable for commercial indoor environment**
 - 1-10W DIY type LS series49
 - 1-3W non-isolated AC/DC converter LS-K3B series.....50
 - 3W white goods AC/DC converter LD-WG series.....55
 - 3-65W cost-effective open frame AC/DC converter LO series67-68
 - Bus power supply for smart building.....73
- 2 These series are suitable for industrial indoor environment**
 - 3-5W 90-528VAC ultra-wide input voltage AC/DC converter LS series51
 - 3-20W 90-528VAC ultra-wide input voltage AC/DC converter LD series.....54
 - 3W AC/DC converter LDE-O series (Transient Over-power up to 12W).....55-56
 - 1-10W compact 85-305VAC wide input voltage LD/LDE series.....56
 - 3-60W compact size universal input voltage AC/DC converter LD/LDE series.....57-58
 - 10W seven outputs open frame LO series specialized for flow meter.....69
 - 30-100W ladder-shaped AC/DC DIN-Rail power supply.....74
- 3 These series are suitable for special industrial indoor environment**
 - 5-8W compact size LD-MU series for medical.....65
 - 15-25W low power consumption AC/DC LH-MU series for medical.....66
- 4 These series are suitable for industrial outdoor environment**
 - Ultra-wide input voltage non-isolated AC/DC single firewire power supply LSF series.....50
 - 45-528VAC ultra-wide input voltage AC/DC core board scheme LSC series52
 - 85-264VAC input voltage AC/DC core board scheme LSC series.....53
 - 5-60W 85-305VAC wide input voltage LH/LHE series.....59-60
 - 30W four outputs metal mask LM series specialized for protective relaying system.....65
 - 10W open frame LO series specialized for electric power.....69
 - 10-15W dual outputs 528V input voltage open frame LO series specialized for electric power.....70
 - 20-30W three outputs open frame AC/DC converters specialized for AC charging station.....70-71
 - 10-25W LH-ER2 series specialized for electric power.....71
 - 75-120W DIN35 package AC/DC DIN-Rail power supply.....75
 - Parallel redundancy power supply.....76
- 5 These series are suitable for special industrial outdoor environment (harsh environment)**
 - 5-60W standard package AC/DC converter LH/LHE series.....61-64
 - 300W 165-264VAC Input AC/DC battery charging module power supply.....72
 - 40-120W ultra-wide, ultra-high input voltage series specialized for mining industry.....79-81
- 6 These series are suitable for special industrial outdoor environment (plateau)**
 - 5-60W 100-1200VDC ultra-wide input voltage isolated & regulated output series.....83
 - 40W 200-1200VDC ultra-wide input voltage isolated & regulated output series.....84
 - 15-40W 200-1500VDC ultra-wide input voltage isolated series.....84-85
 - 45-75W ultra-wide input voltage caged power supply specialized for SVG.....85-86
 - 120-200W new energy 200-1100VDC ultra-wide input voltage converter.....87
 - 200W 250-1500VDC new energy ultra wide &high input voltage converter.....88
- 7 These series are suitable for special industrial outdoor environment (Ocean)**
 - 80-150W AC/DC LI series specialized for marine engineering device.....77-78


These series are suitable for commercial indoor environment

1-10W DIY type LS series



Features

- Suitable for various applications, especially for limited dimension application
- Input voltage range: 85-305VAC/70-430VDC;
(LS08/LS10: 85-305VAC/100-430VDC)
- Operating temperature: -40°C to +85°C
- Isolation: 3000VAC
- Efficiency up to 82%
- Output short-circuit and over-current protections
- IEC/UL/EN60950 approval, Meet EN60335, IEC/UL/EN62368 standards.



Product Program					
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi.(%) (typ)	Certification
LS01-15B05SS(-F)	1W	85-305VAC 70-430VDC	5V/200mA	66	
LS01-15B09SS(-F)		85-305VAC 70-430VDC	9V/111mA	67	
LS01-15B12SS(-F)		85-305VAC 70-430VDC	12V/83mA	70	
LS01-15B15SS(-F)		85-305VAC 70-430VDC	15V/67mA	69	
LS01-15B24SS(-F)		85-305VAC 70-430VDC	24V/42mA	68	
LS03-15B03SR2S(-F)	1.98W	85-305VAC 70-430VDC	3.3V/600mA	65	
LS03-15B05SR2S(-F)	3W	85-305VAC 70-430VDC	5V/600mA	70	
LS03-15B09SR2S(-F)		85-305VAC 70-430VDC	9V/333mA	73	
LS03-15B12SR2S(-F)		85-305VAC 70-430VDC	12V/250mA	74	
LS03-15B15SR2S(-F)		85-305VAC 70-430VDC	15V/200mA	75	
LS03-15B24SR2S(-F)	3.3W	85-305VAC 70-430VDC	24V/125mA	77	
LS05-13B03SR2S(-F)		85-305VAC 70-430VDC	3.3V/1000mA	67	
LS05-13B05SR2S(-F)		85-305VAC 70-430VDC	5V/1000mA	74	
LS05-13B09SR2S(-F)		85-305VAC 70-430VDC	9V/560mA	75	
LS05-13B12SR2S(-F)		85-305VAC 70-430VDC	12V/420mA	77	
LS05-13B15SR2S(-F)	85-305VAC 70-430VDC	15V/340mA	77		
LS05-13B24SR2S(-F)	5.28W	85-305VAC 70-430VDC	24V/210mA	79	
LS08-13B03SS(-F)		85-305VAC 100-430VDC	3.3V/1600mA	70	
LS08-13B05SS(-F)		85-305VAC 100-430VDC	5V/1600mA	74	
LS08-13B09SS(-F)		85-305VAC 100-430VDC	9V/880mA	75	
LS08-13B12SS(-F)		85-305VAC 100-430VDC	12V/670mA	76	
LS08-13B15SS(-F)	85-305VAC 100-430VDC	15V/530mA	77		
LS08-13B24SS(-F)	6.6W	85-305VAC 100-430VDC	24V/330mA	79	
LS10-13B03SS(-F)		85-305VAC 100-430VDC	3.3V/2000mA	70	
LS10-13B05SS(-F)		85-305VAC 100-430VDC	5V/2000mA	76	
LS10-13B09SS(-F)		85-305VAC 100-430VDC	9V/1100mA	78	
LS10-13B12SS(-F)		85-305VAC 100-430VDC	12V/830mA	80	
LS10-13B15SS(-F)	85-305VAC 100-430VDC	15V/670mA	81		
LS10-13B24SS(-F)	10W	85-305VAC 100-430VDC	24V/420mA	82	

Note: 1. External electrolytic capacitors are required. For more details please refer to typical application;
 2. All series are available for 90° pin-out;
 3. Detailed application please refer to datasheet;
 4. Note: Suffix "-F" is the models with 90 degree bent pins. For example, the corresponding model with 90 degree bent pins of LS03-15B03SR2S is LS03-15B03SR2S-F.

Package Dimension

LS01 & LS03 Series: LxWxH: 35.00x18.00x11.00(mm)

Unit: mm[inch]
 Pin section tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

Pin	Function
1	AC(N)
3	AC(L)
5	+V(CAP)
7	-V(CAP)
10	-Vo
12	+Vo

LS05-13BxxSR2S Series: LxWxH: 35.00x18.00x11.00(mm)

Unit: mm[inch]
 Pin section tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

Pin	Function
1	AC(N)
3	AC(L)
5	+V(CAP)
7	-V(CAP)
12	-Vo
14	+Vo

LS08/LS10-13BxxSS Series: LxWxH: 44.50x22.00x15.00(mm)

Unit: mm[inch]
 Pin section tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

Pin	Function
1	AC(N)
3	AC(L)
5	+V(CAP)
7	-V(CAP)
14	-Vo
16	+Vo

• This catalog is used to introduce our latest products, for more information, please contact our sales department

These series are suitable for commercial indoor environment

1-3W non-isolated AC/DC converter LS-K3B series



Features

- Ultra-wide input voltage range: 85-305VAC/70-430VDC
- Open frame, compact size
- High reliability, green power
- Industrial product design
- Optional ECM peripheral circuit that can simplify customers' PCB design
- Output short-circuit, over current protections
- Meet IEC/UL/EN62368 standards



Product Program				
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Certification
LS01-K3B05SS	1W	85-305VAC	5V/200mA	
LS03-K3B12SS	3W	85-305VAC	12V/250mA	

Package Dimension

LSxx-K3BxxSS Series: LxWxH: 25.21x17.43x9.50(mm)

Unit: mm[inch]
 General tolerance: ±1.00[±0.039]

Pin	Function
1	AC(N)
2	AC(L)
3	+V(CAP)
4	-Vo
5	+Vo

These series are suitable for industrial indoor/outdoor environment



Ultra-wide input voltage non-isolated AC/DC single firewire power supply LSF Series

Features

- Ultra-low ultra-wide input voltage: 15-380VDC
- Ultra-low quiescent current, low ripple
- Compact size
- Output short-circuit protection



Product Program				
Model Number	Power	Output Voltage (Vo)	Output Voltage (Vo1)	Certification
LSF01-K5B12SS	1W	12.5VDC	5VDC	

Package Dimension

LSFxx-K5BxxSS Series: LxWxH: 15.70x9.00x14.50(mm)

Unit: mm[inch]
 Pin section tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]
 The layout of the device is for reference only, please refer to the actual product

Pin	Function
1	+Vin
2	-Vin
3	-Vo
4	+Vo

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com


These series are suitable for industrial indoor environment

3-5W 90-528VAC ultra-wide input voltage AC/DC converter LS series



Features


- Suitable for various applications, especially for limited dimension application
- Input voltage range: 90-528VAC/100-745VDC
- Operating temperature: -40°C to +85°C
- Isolation: 4000VAC
- Output short-circuit, over-current protections
- FCC part15 standard, UL/IEC/EN62368 approval

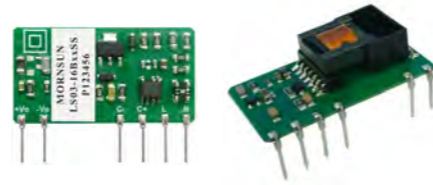

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Certification
LS03-16B03SS(-F)	1.65W	90-528VAC	3.3V/500mA	CE CB RoHS
LS03-16B05SS(-F)	2.5W	90-528VAC	5V/500mA	
LS03-16B09SS(-F)	3W	90-528VAC	9V/333mA	
LS03-16B12SS(-F)		90-528VAC	12V/250mA	
LS03-16B15SS(-F)		90-528VAC	15V/200mA	
LS03-16B24SS(-F)	5W	90-528VAC	24V/125mA	CE RoHS
LS05-26B03SS(-F)		90-528VAC	3.3V/850mA	
LS05-26B05SS(-F)*		90-528VAC	5V/850mA	
LS05-26B09SS(-F)*	90-528VAC	9V/560mA		
LS05-26B12SS(-F)*	90-528VAC	12V/420mA		
LS05-26B15SS(-F)*	5W	90-528VAC	15V/340mA	CE RoHS
LS05-26B24SS(-F)*		90-528VAC	24V/215mA	

- Note:
1. External electrolytic capacitors are required to AC input modules for LS series;
 2. LD series in DIP package meet the requirements of ±1KV surge level. If the application requires higher performance for surge, our recommended peripheral circuit is available;
 3. LS series are available for 90° pin-out.
 4. Products marked with "*" meet UL62368, EN62368, FCC part 15 standard


Typical Application Circuit

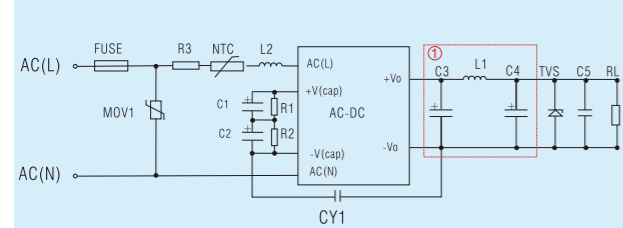

Note: ① is Pi filter circuit

Package Dimension

LS03-16BxxSS/LS05-26BxxSS Series:
LxWxH: 44.50x22.00x13.00(mm)

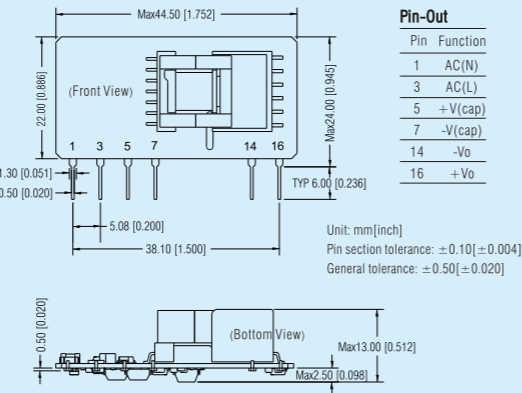


Pin-Out

Pin	Function
1	AC(N)
3	AC(L)
5	+V(cap)
7	-V(cap)
14	-Vo
16	+Vo

- Note:
1. It is necessary to add C1, C2 and R1, R2 between pin 5 and pin 7;
 2. It is necessary to add pi-type filter circuit to the output, such as the typical application of Figure 1.

LS03-16BxxSS(-F)/LS05-26BxxSS(-F) Series:
LxWxH: 44.50x24.00x13.00(mm)

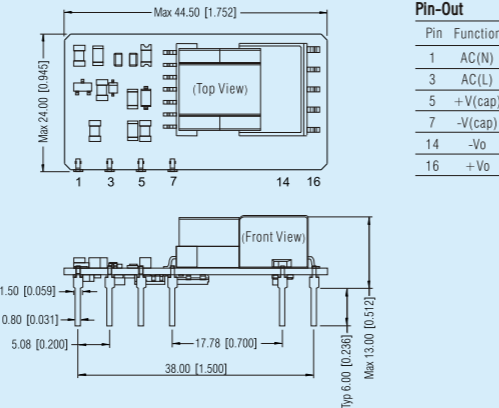

Pin-Out

Pin	Function
1	AC(N)
3	AC(L)
5	+V(cap)
7	-V(cap)
14	-Vo
16	+Vo

- Note:
1. It is necessary to add C1, C2 and R1, R2 between pin 5 and pin 7;
 2. It is necessary to add pi-type filter circuit to the output, such as the typical application of Figure 1.


These series are suitable for industrial indoor/outdoor environment

45-528VAC ultra-wide input voltage AC/DC core board scheme LSC series



Core board features


- Integrate 2 MOSFET inside, withstand voltage up to 1300V
- Integrate dedicated high-voltage start controller
- Cost controllable, flexibly selection of external components based on actual requirements
- Flexible design, meets multi-output requirements
- High quality and reliability guarantee
- 5 years warranty

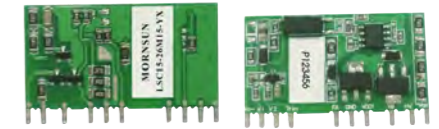

Core board

Power supply demo board features

- Ultra wide input voltage range: 45 - 528VAC/65-745VDC
- Circuit can be powered by three-phase four-wire, or any two wires of them
- Isolation: 4000VAC
- Output short-circuit, over-current, over-voltage protections
- High efficiency, high reliability
- Low ripple & noise, low standby power consumption

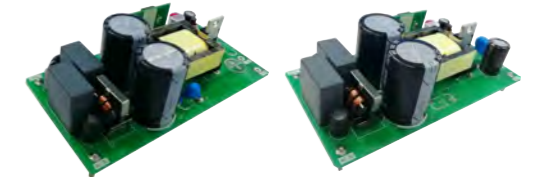


Demo board

Product Program

Core Board Part No.	Recommended Peripheral Part No.(Demo board)	Power	Nominal Output Voltage and Current (Vo/Io)			Effi(%) (typ)	Certification
			Vo1/Io1	Vo2/Io2	Vo3/Io3		
LSC15-26M05	LSC15-26B05-Demo	15W	5VDC/3A	---	---	76	RoHS
LSC15-26M09	LSC15-26B09-Demo		9VDC/1.667A	---	---	78	
LSC15-26M12	LSC15-26B12-Demo		12VDC/1.25A	---	---	80	
LSC15-26M15	LSC15-26B15-Demo		15VDC/1A	---	---	80	
LSC15-26M24	LSC15-26B24-Demo		24VDC/0.625A	---	---	83	
LSC15-26M05	LSC15-26D0505-08-Demo	14W	5VDC/2A	5VDC/0.8A	---	76	
LSC15-26M05	LSC15-26D0524-04-Demo	14.6W	5VDC/1A	24DC/0.4A	---	78	
LSC15-26M05	LSC15-26C0505-05-Demo	15W	5VDC/2A	5VDC/0.5A	5VDC/0.5A	75	
LSC15-26M05	LSC15-26C0512-02-Demo	14.8W	5VDC/2A	12VDC/0.2A	12VDC/0.2A	77	
LSC15-26M05	LSC15-26C0515-02-Demo	15W	5VDC/1.8A	15VDC/0.2A	15VDC/0.2A	78	
LSC15-26M12	LSC15-26D1212-03-Demo	15W	12VDC/0.95A	12VDC/0.3A	---	78	

Package Dimension

LSC15-26Mxx Series: LxWxH: 37.00x20.00x4.60(mm)

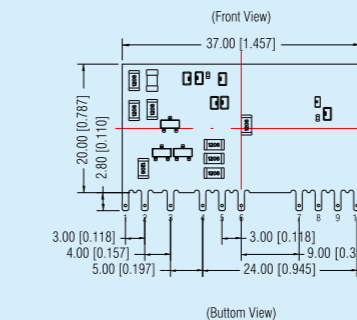

Pin-Out

Pin	Function
1	Vgs
2	HV
3	Vd
4	VDD1
5	GND
6	FA
7	Trim
8	V2
9	V1
10	Vo-

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
The layout of devices is for reference only, please in kind prevail

These series are suitable for industrial indoor/outdoor environment

85-264VAC input voltage AC/DC core board scheme LSC series

RoHS

Core board features

- Integrate dedicated high-voltage start controller
- Operating temperature: -40°C to +85°C
- Cost controllable, flexibly selection of external components based on actual requirements
- Flexible design, meets multi-output requirements
- High quality and reliability guarantee
- 5 years warranty

Power supply demo board features

- Universal input voltage: 85 - 264VAC/100-370VDC
- Operating temperature: -40°C to +85°C
- Output short-circuit, over-current, over-voltage protections
- High efficiency, high reliability
- Low ripple & noise, low standby power consumption



Core board




Demo board

Product Program

Core Board Part No.	Recommended Peripheral Part No. (Demo board)	Power	Nominal Output Voltage and Current (Vo/Io)		Effi.(%) (typ)	Certification
			Vo1/Io1	Vo2/Io2		
LSC20-20M03	LSC20-20B03-Demo	11.55W	3.3VDC/3500mA	—	73	RoHS
LSC20-20M05	LSC20-20B05-Demo	15.5W	5VDC/3100mA	—	76	
LSC20-20M09	LSC20-20B09-Demo	20W	9VDC/2100mA	—	81	
LSC20-20M12	LSC20-20B12-Demo		12VDC/1600mA	—	83	
LSC20-20M15	LSC20-20B15-Demo		15VDC/1300mA	—	84	
LSC20-20M24	LSC20-20B24-Demo		24VDC/850mA	—	86	
LSC20-20M05	LSC20-20C0512-04-Demo		5VDC/2000mA	±12VDC/400mA	78	
LSC20-20M05	LSC20-20D0512-06-Demo	5VDC/2500mA	12VDC/600mA	78		
LSC20-20M05	LSC20-20D0524-03-Demo	5VDC/2500mA	24VDC/300mA	78		

Package Dimension

LSC20-20Mxx Series: LxWxH: 32.10x16.80x3.0(mm)

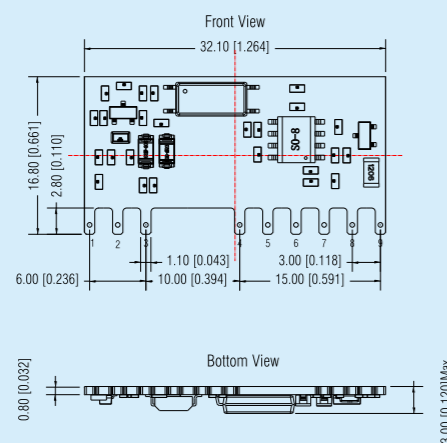

Pin-Out

Pin	Function
1	Vo-
2	V1
3	V2
4	FA
5	Vdd
6	Gate
7	GND
8	CS
9	HV

Unit: mm[inch]

Pin section tolerance: ±0.10[±0.004]

General tolerance: ±0.50[±0.020]

The layout of devices is for reference only, please refer to the actual product

These series are suitable for industrial indoor environment

3-20W 90-528VAC ultra-wide input voltage AC/DC converter LD series

RoHS CE CB

Features

- Suitable for electric power, industrial control and intelligent building applications
- Input voltage range: 90-528VAC/100-745VDC
- Operating temperature: -40°C to +70°C
- Isolation: 4000VAC(LD03:3000VAC)
- UL/IEC/EN62368 approval
- Output short-circuit, over-current and over-voltage protections




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi.(%) (typ)	Certification	
LD03-16B03	1.65W	90-528VAC	3.3V/500mA	63	RoHS CE CB	
LD03-16B05	2.5W	90-528VAC	5V/500mA	70		
LD03-16B09	3W	90-528VAC	9V/333mA	73		
LD03-16B12		90-528VAC	12V/250mA	76		
LD03-16B15		90-528VAC	15V/200mA	76		
LD03-16B24	90-528VAC	24V/125mA	76	RoHS CE		
LD10-26B03	6.6W	90-528VAC	3.3V/2000mA		72	
LD10-26B05	10W	90-528VAC	5V/2000mA		76	
LD10-26B09		90-528VAC	9V/1100mA		78	
LD10-26B12		90-528VAC	12V/900mA		80	
LD10-26B15		90-528VAC	15V/700mA		80	
LD10-26B24		90-528VAC	24V/450mA		82	
LD20-26B03	11.88W	90-528VAC	3.3V/3600mA		74	RoHS CE
LD20-26B05	18W	90-528VAC	5V/3600mA		78	
LD20-26B09	20W	90-528VAC	9V/2230mA		79	
LD20-26B12		90-528VAC	12V/1660mA	82		
LD20-26B15		90-528VAC	15V/1330mA	83		
LD20-26B24		90-528VAC	24V/833mA	83		

Package Dimension

LD10/20 Series:

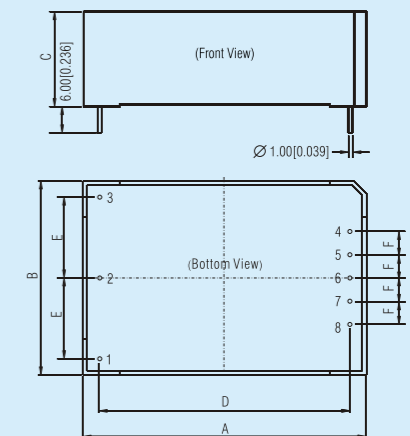

Outline & Dimensions


NO.	LD10		LD20	
	LD10	LD20	LD10-26B	LD20-26B
A	62.00	70.00	1	NC
B	45.00	48.00	2	AC(N)
C	30.00	30.00	3	AC(L)
D	54.00	62.00	4	+Vo
E	17.50	20.00	5	No Pin
F	5.00	5.75	6	No Pin
G	12.50	12.50	7	No Pin
			8	-Vo

Unit: mm[inch]

Pin diameter tolerance: ±0.10[±0.004]

General tolerance: ±0.50[±0.020]

Ld03 Series: LxWxH: 50.80x25.40x15.16(mm)



Pin-Out

Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo


Unit: mm[inch]

Pin diameter tolerance: ±0.10[±0.004]

General tolerance: ±0.50[±0.020]

EMC Solution-recommended Circuit

Take LD03-16Bxx as an example, others please refer to datasheet.

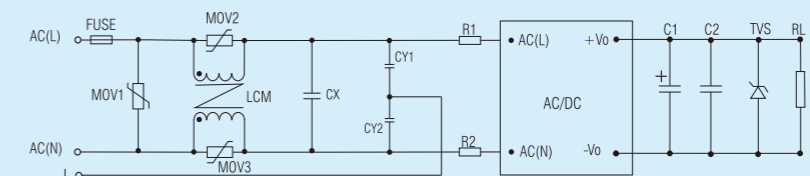

These series are suitable for commercial indoor environment

3W white goods AC/DC converter LD-WG series

Features

- Wide input voltage range: 85-264VAC/120-373VDC
- Operating temperature: -25°C to +70°C (full load)
- Isolation: 4000VAC
- Output short-circuit, over-current and over-voltage protections
- EMI meet CISPR32/EN55032 CLASS B
- EN60335、EN62368 approval, meet UL60335、UL62368 standards



Product Program					
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification
LD03-20B05WG	3W	85-264VAC	5V/0.6A	72	
LD03-20B12WG		85-264VAC	12V/0.25A	74	
LD03-20B24WG		85-264VAC	24V/0.125A	75	

Package Dimension															
LD03-20BxxWG Series: LxWxH: 32.30x27.30x21.80(mm)															
Pin-Out <table border="1"> <thead> <tr> <th>Pin</th> <th>1</th> <th>2</th> <th>4</th> <th>5</th> <th>7</th> <th>9</th> </tr> </thead> <tbody> <tr> <td>Function</td> <td>AC(N)</td> <td>Nopin</td> <td>Nopin</td> <td>AC(L)</td> <td>+Vo</td> <td>-Vo</td> </tr> </tbody> </table>		Pin	1	2	4	5	7	9	Function	AC(N)	Nopin	Nopin	AC(L)	+Vo	-Vo
Pin	1	2	4	5	7	9									
Function	AC(N)	Nopin	Nopin	AC(L)	+Vo	-Vo									
Unit: mm[inch] Connect pin size: $\varnothing 0.8[0.031]$ Pin diameter tolerance: $\pm 0.10[\pm 0.004]$ General tolerance: $\pm 0.50[\pm 0.020]$															

These series are suitable for industrial indoor environment

3W AC/DC converter LDE-O series (transient over-power up to 12W)

Features


- 3W rated output power, transient over-power up to 12W and last for 10s
- Wide input voltage range: 85-264VAC/100-370VDC
- Operating temperature: -40°C to +80°C
- Isolation: 4000VAC
- Output short-circuit, over-current, over-voltage protections
- High efficiency, high reliability
- Regulated output, low ripple & noise
- Plastic case meets UL94V-0 flammability
- EMI performance meets CISPR32 / EN55032 CLASS B
- IEC/UL/EN62368 approval



Package Dimension													
LDE03-20Bxx-O Series: LxWxH: 37.00x24.50x18.00(mm)													
Pin-Out <table border="1"> <thead> <tr> <th>Pin</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> </tr> </thead> <tbody> <tr> <td>Function</td> <td>AC(L)</td> <td>AC(N)</td> <td>NC</td> <td>-Vo</td> <td>+Vo</td> </tr> </tbody> </table>		Pin	1	2	3	4	5	Function	AC(L)	AC(N)	NC	-Vo	+Vo
Pin	1	2	3	4	5								
Function	AC(L)	AC(N)	NC	-Vo	+Vo								
Unit: mm[inch] Pin diameter tolerance: $\pm 0.10[\pm 0.004]$ General tolerance: $\pm 0.50[\pm 0.020]$													

Product Program								
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification			
LDE03-20B03-0	2.3W	85-264VAC	3.3V/700mA	68				
LDE03-20B05-0						85-264VAC	5V/600mA	72
LDE03-20B09-0						85-264VAC	9V/330mA	73
LDE03-20B12-0						85-264VAC	12V/250mA	78
LDE03-20B15-0						85-264VAC	15V/200mA	78
LDE03-20B24-0						85-264VAC	24V/125mA	80

EMC Solution-recommended Circuit

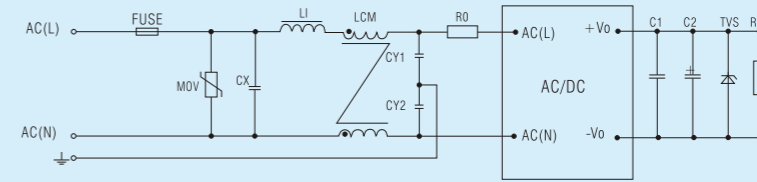

These series are suitable for industrial indoor environment

1-10W compact 85-305VAC wide input voltage LD/LDE series

Features

- Compact size, suitable for limited dimension application
- Input voltage range: 85-305VAC/100-430VDC
- Isolation: 4000VAC (LD01: 3000VAC)
- Efficiency up to 82%
- Low standby power consumption, high efficiency, environment friendly
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN62368 approval



A2S Chassis Mounting

A4S DIN-Rail Mounting

Product Program					
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification
LD01-10B03	1W	85-305VAC	3.3V/300mA	63	
LD01-10B05			5V/200mA	68	
LD01-10B09			9V/111mA	72	
LD01-10B12			12V/83mA	73	
LD01-10B15			15V/67mA	74	
LD01-10B24			24V/42mA	75	
LDE02-23B03	2W	85-305VAC	3.3V/600mA	65	
LDE02-23B05			5V/400mA	70	
LDE02-23B09			9V/222mA	72	
LDE02-23B12			12V/167mA	76	
LDE02-23B15			15V/133mA	76	
LDE02-23B24			24V/83mA	78	
LDE05-23B03	4.2W	85-305VAC	3.3V/1250mA	70	
LDE05-23B05			5V/1000mA	76	
LDE05-23B09			9V/550mA	74	
LDE05-23B12			12V/420mA	77	
LDE05-23B15			15V/333mA	77	
LDE05-23B24			24V/230mA	80	
LDE10-23B03	6.6W	85-305VAC	3.3V/2000mA	72	
LDE10-23B05			5V/2000mA	76	
LDE10-23B09			9V/1100mA	79	
LDE10-23B12			12V/900mA	81	
LDE10-23B15			15V/700mA	81	
LDE10-23B24			24V/450mA	82	


Package Dimension

Outline & Dimensions				
NO.	LD01/LDE02	LDE05	LDE10	
A	33.70	50.80	53.80	
B	22.20	25.40	28.80	
C	18.00	15.16	19.00	
D	28.00	45.72	45.72	
E	15.24	20.32	20.32	
F	7.62	10.16	10.16	
G	6.00	6.00	6.00	

Note: A2S chassis mounting and A4S DIN-Rail mounting are available and please refer to datasheet for details.

EMC Solution-recommended Circuit

Take LD05-23Bxx as an example, others please refer to datasheet.

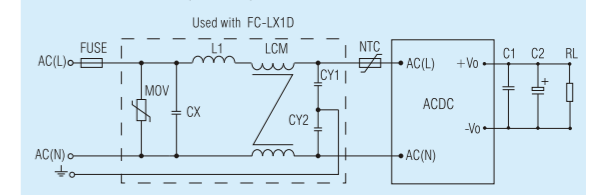

- Note: 1. LDE series meet the requirements of lightning protection. If the application requires higher performance for lightning protection and EMI, our standard products LHE series (surge level three), LH-ER2 (surge level four) and recommended peripheral circuit are available;
 2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, LDE05-23B with FC-LX1D reaches to $\pm 2KV/4KV$ (level four);
 3. Detailed application please refer to datasheet.

These series are suitable for industrial indoor environment

3-60W compact size universal input voltage AC/DC converter LD/LDE series

UL us CE CB RoHS

Features

- Compact size, suitable for limited dimension application
- Input voltage range: 85-264VAC/100-370VDC
- Operating temperature: -40°C to $+70^{\circ}\text{C}$
- Isolation: 4000VAC
- Efficiency up to 90%
- high efficiency, environment friendly
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit, over-current and over-voltage protections
- IEC/EN/UL62368, EN60335(LDE10-20Bxx) approval

Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification		
LDE03-20B03	2.3W	85-264VAC	3.3V/700mA	66	UL us CB CE RoHS		
LDE03-20B05	3W	85-264VAC	5V/600mA	74			
LDE03-20B09		85-264VAC	9V/330mA	75			
LDE03-20B12		85-264VAC	12V/250mA	77			
LDE03-20B15		85-264VAC	15V/200mA	77			
LDE03-20B24	85-264VAC	24V/125mA	78				
LDE03-20B03W	3W	85-264VAC	3.3V/700mA	66			
LDE03-20B05W		85-264VAC	5V/600mA	74			
LDE03-20B09W		85-264VAC	9V/330mA	75			
LDE03-20B12W		85-264VAC	12V/250mA	77			
LDE03-20B15W	85-264VAC	15V/200mA	77				
LDE03-20B24W	85-264VAC	24V/125mA	78				
LD03-20B03-C	2.3W	85-264VAC	3.3V/700mA	65		UL us CB CE RoHS	
LD03-20B05-C	3W	85-264VAC	5V/600mA	72			
LD03-20B09-C		85-264VAC	9V/330mA	74			
LD03-20B12-C		85-264VAC	12V/250mA	75			
LD03-20B15-C		85-264VAC	15V/200mA	75			
LD03-20B24-C	85-264VAC	24V/125mA	77				
LDE05-20B03	3.3W	85-264VAC	3.3V/1000mA	68			UL us CB CE RoHS
LDE05-20B05	5W	85-264VAC	5V/1000mA	75			
LDE05-20B09		85-264VAC	9V/560mA	77			
LDE05-20B12		85-264VAC	12V/420mA	79			
LDE05-20B15		85-264VAC	15V/330mA	79			
LDE05-20B24	85-264VAC	24V/210mA	81				
LDE05-20B03W	5W	85-264VAC	3.3V/1000mA	68			
LDE05-20B05W		85-264VAC	5V/1000mA	75			
LDE05-20B09W		85-264VAC	9V/560mA	77			
LDE05-20B12W		85-264VAC	12V/420mA	79			
LDE05-20B15W	85-264VAC	15V/330mA	79				
LDE05-20B24W	85-264VAC	24V/210mA	81				
LD05-20B03-C	3.3W	85-264VAC	3.3V/1000mA	67	UL us CB CE RoHS		
LD05-20B05-C	5W	85-264VAC	5V/1000mA	74			
LD05-20B09-C		85-264VAC	9V/560mA	76			
LD05-20B12-C		85-264VAC	12V/420mA	78			
LD05-20B15-C		85-264VAC	15V/330mA	78			
LD05-20B24-C	85-264VAC	24V/210mA	80				
LDE06-20B03	4.1W	85-264VAC	3.3V/1250mA	70		UL us CB CE RoHS	
LDE06-20B05	6W	85-264VAC	5V/1200mA	76			
LDE06-20B09		85-264VAC	9V/660mA	74			
LDE06-20B12		85-264VAC	12V/500mA	77			
LDE06-20B15		85-264VAC	15V/400mA	77			
LDE06-20B24	85-264VAC	24V/250mA	80				



Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification	
LDE10-20B03	6.6W	85-264VAC	3.3V/2000mA	71	UL us CB CE RoHS	
LDE10-20B05	10W	85-264VAC	5V/2000mA	76		
LDE10-20B09		85-264VAC	9V/1100mA	80		
LDE10-20B12		85-264VAC	12V/900mA	81		
LDE10-20B15		85-264VAC	15V/700mA	81		
LDE10-20B24	85-264VAC	24V/450mA	83			
LDE15-20B03	8.9W	85-264VAC	3.3V/2700mA	72		UL us CB CE RoHS
LDE15-20B05	13.5W	85-264VAC	5V/2700mA	76		
LDE15-20B09	15W	85-264VAC	9V/1660mA	77		
LDE15-20B12		85-264VAC	12V/1250mA	80		
LDE15-20B15		85-264VAC	15V/1000mA	81		
LDE15-20B24		85-264VAC	24V/625mA	81		
LDE20-20B03	11.8W	85-264VAC	3.3V/3600mA	74	UL us CB CE RoHS	
LDE20-20B05	18W	85-264VAC	5V/3600mA	78		
LDE20-20B09	20W	85-264VAC	9V/2200mA	79		
LDE20-20B12		85-264VAC	12V/1660mA	82		
LDE20-20B15		85-264VAC	15V/1330mA	83		
LDE20-20B24		85-264VAC	24V/833mA	83		
LDE45-20B05	40W	85-264VAC	5V/8A	81		UL us CB CE RoHS
LDE45-20B12	45W	85-264VAC	12V/3.8A	84		
LDE45-20B15		85-264VAC	15V/3A	85		
LDE45-20B24		85-264VAC	24V/1.9A	86		
LDE45-20B48		85-264VAC	48V/0.94A	87		
LDE60-20B05	50W	85-264VAC	5V/10000mA	84		
LDE60-20B12	60W	85-264VAC	12V/5000mA	87		
LDE60-20B15		85-264VAC	15V/4000mA	88		
LDE60-20B24		85-264VAC	24V/2500mA	89		
LDE60-20B48		85-264VAC	48V/1250mA	90		

- Note: 1. LDE series meet the requirements of lightning protection. If the application requires higher performance for lightning protection and EMI, our standard products LHE series (surge level three), LH-ER2 (surge level four) and recommended peripheral circuit are available;
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, LDE03/LDE05 with FC-LX1D reaches to $\pm 2\text{kV}/4\text{kV}$ (level four), and LDE15/LDE20 with FC-LX1D2 to $\pm 4\text{kV}/6\text{kV}$;
3. Detailed application please refer to datasheet.


• This catalog is used to introduce our latest products, for more information, please contact our sales department

Package Dimension


LDE03/05 Series: LxWxH: 37.00x24.50x18.00(mm)

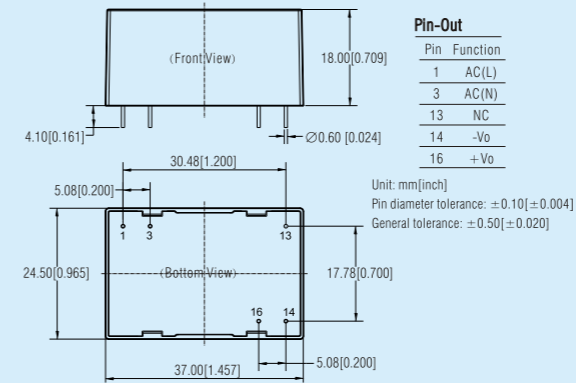


LDE06/10/15/20 Series:

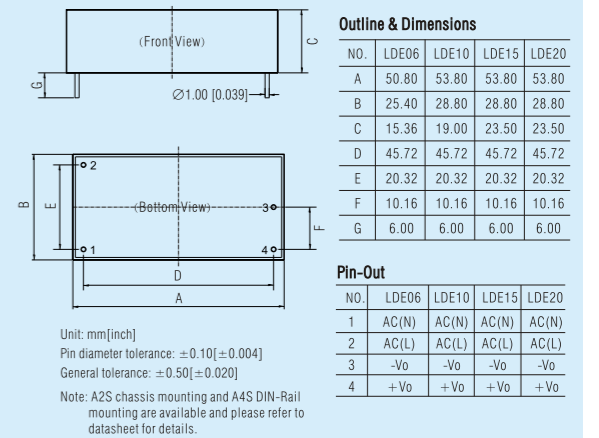


LDE03/05-20BxxW Series: LxWxH: 37.00x24.50x18.00(mm)

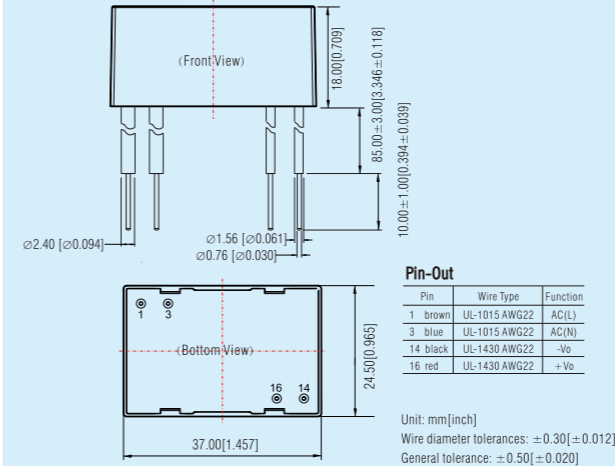


LDE45/60-20Bxx Series: LxWxH: 87.00x52.00x29.50(mm)

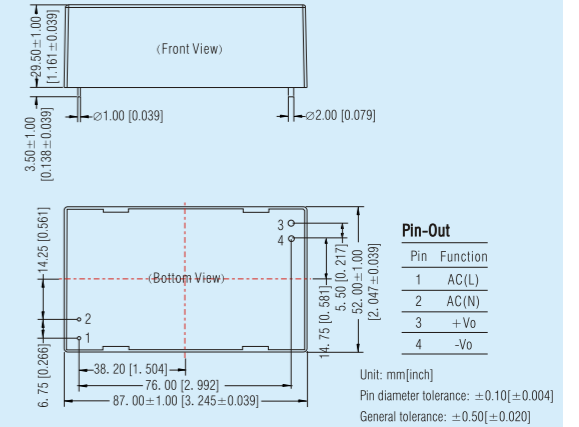

LD03/05-20Bxx-C Series: LxWxH: 37.00x24.50x18.00(mm)

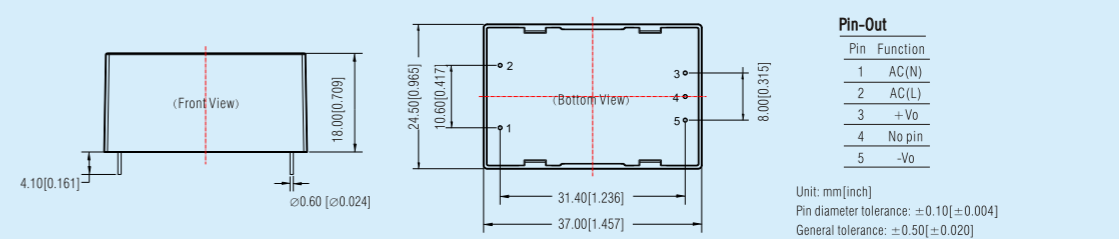

EMC Solution-recommended Circuit

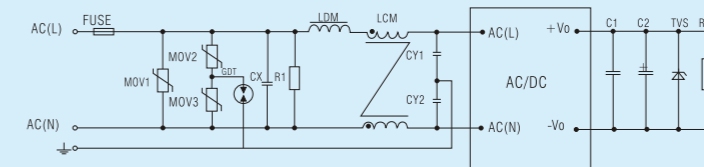

Take LDE20-20Bxx as an example, others please refer to datasheet.

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

These series are suitable for industrial outdoor environment

5-60W 85-305VAC wide input voltage LH/LHE series



Features



- Wide input voltage, suitable for unstable electric supply application
- Input voltage range: 85-305VAC/100-430VDC
- Operating temperature: -40°C to +70°C/-40°C to +85°C
- Isolation: 4000VAC(LH:3000VAC)
- Efficiency up to 87%
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting(TS35)
- EMI meets EN55022 CLASS B
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN62368 approval

Model Number	Power	Input Voltage Range	Output Voltage/ Current(Vo/Io)	Effi(%) (230VAC.typ.)	Certification
LH05-13B03	4W	85-305VAC	3.3V/1250mA	72	UL
LH05-13B05		85-305VAC	5V/1000mA	77	
LH05-13B09		85-305VAC	9V/550mA	79	CB
LH05-13B12	5W	85-305VAC	12V/420mA	81	
LH05-13B15		85-305VAC	15V/330mA	82	CE
LH05-13B24		85-305VAC	24V/230mA	84	
LHE10-23B03	6.6W	85-305VAC	3.3V/2000mA	70	RoHS
LHE10-23B05		85-305VAC	5V/2000mA	76	
LHE10-23B09		85-305VAC	9V/1100mA	78	CE
LHE10-23B12	10W	85-305VAC	12V/900mA	80	
LHE10-23B15		85-305VAC	15V/700mA	81	RoHS
LHE10-23B24		85-305VAC	24V/450mA	82	
LHE15-23B03	9.9W	85-305VAC	3.3V/3000mA	73	UL
LHE15-23B05	14W	85-305VAC	5V/2800mA	76	
LHE15-23B09		85-305VAC	9V/1600mA	78	CB
LHE15-23B12		85-305VAC	12V/1250mA	80	
LHE15-23B15	15W	85-305VAC	15V/1000mA	80	CE
LHE15-23B24		85-305VAC	24V/625mA	83	
LHE15-23B48		85-305VAC	48V/320mA	85	RoHS
LH20-13B03	11.55W	85-305VAC	3.3V/3500mA	75	
LH20-13B05	17.5W	85-305VAC	5V/3500mA	78	
LH20-13B09		85-305VAC	9V/2100mA	79	CB
LH20-13B12	20W	85-305VAC	12V/1600mA	83	
LH20-13B15		85-305VAC	15V/1300mA	84	CE
LH20-13B24		85-305VAC	24V/850mA	85	
LHE25-23B03	13.53W	85-305VAC	3.3V/4100mA	75	UL
LHE25-23B05	20.5W	85-305VAC	5V/4100mA	78	
LHE25-23B09	22.5W	85-305VAC	9V/2500mA	80	CB
LHE25-23B12	25W	85-305VAC	12V/2100mA	82	
LHE25-23B15	24W	85-305VAC	15V/1600mA	83	CE
LHE25-23B24	26.4W	85-305VAC	24V/1100mA	85	
LHE25-23B48	24W	85-305VAC	48V/500mA	87	RoHS
LHE40-23B03	26.4W	85-305VAC	3.3VDC/8000mA	77	
LHE40-23B05		85-305VAC	5VDC/8000mA	80	
LHE40-23B12		85-305VAC	12VDC/3330mA	84	RoHS
LHE40-23B15	40W	85-305VAC	15VDC/2660mA	84	
LHE40-23B24		85-305VAC	24VDC/1670mA	84	CE
LHE40-23B48		85-305VAC	48VDC/830mA	84	
LHE60-23B05	50W	85-305VAC	5V/10000mA	82	UL
LHE60-23B12		85-305VAC	12V/5000mA	86	
LHE60-23B15	60W	85-305VAC	15V/4000mA	86	CE
LHE60-23B24		85-305VAC	24V/2500mA	86	
LHE60-23B48		85-305VAC	48V/1250mA	86	RoHS



Package Dimension

LH05/LH20 Series

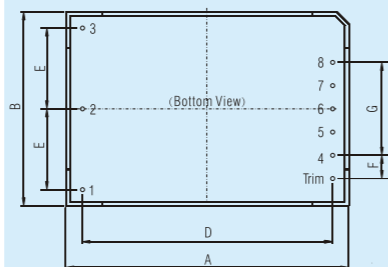

Outline & Dimensions

NO.	LH05	LH20
A	55.00	70.00
B	45.00	48.00
C	21.00	23.50
D	40.50	62.00
E	12.50	20.00
F	-	5.75
G	16.00	23.00

Pin-Out



Pin	LH-13B	Pin	LH-13B
1	⏏	6	No Pin
2	AC(N)	7	No Pin
3	AC(L)	8	+Vo
4	-Vo	Trim	Trim**
5	No Pin		

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
Pin length(H): $\geq 6.00 [0.236]$
General tolerance: $\pm 0.50 [\pm 0.020]$

Note: There is no pin "1" ⏏ on LH15-13B
Trim**: only for LH20/25-13B Series
A2 chassis mounting and A4 DIN-Rail mounting are available and please refer to datasheet for details.
Further developing is also available if needed.

Package Dimension

LHE10/15

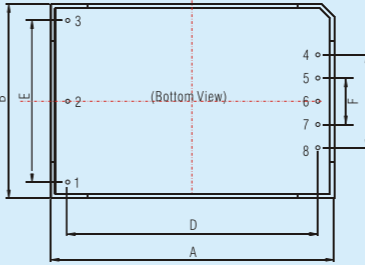

Outline & Dimensions



NO.	LHE10	LHE15
A	55.00	62.00
B	45.00	45.00
C	21.00	22.50
D	47.00	54.00
E	35.00	35.00
F	10.00	10.00
G	20.00	20.00

Pin-Out

Pin	LHE10	LHE15
1	⏏	No Pin
2	AC(N)	AC(N)
3	AC(L)	AC(L)
4	+Vo	+Vo
5	No Pin	No Pin
6	No Pin	No Pin
7	No Pin	No Pin
8	-Vo	-Vo

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.50 [\pm 0.020]$

LDE25-23Bxx Series: LxWxH: 87.00x52.00x29.00(mm)

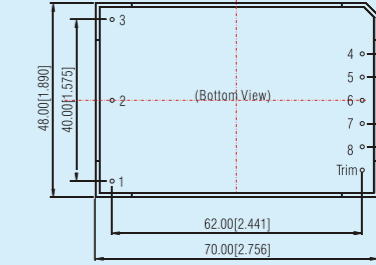
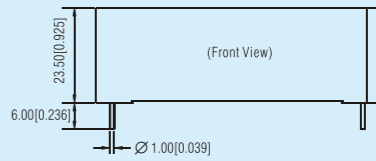


Pin-Out

Pin	LHE10
1	⏏
2	AC(N)
3	AC(L)
4	+Vo
5	No Pin
6	No Pin
7	No Pin
8	-Vo
Trim	Trim

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.50 [\pm 0.020]$

LHE40-23Bxx Series: LxWxH: 87.00x52.00x29.00(mm)

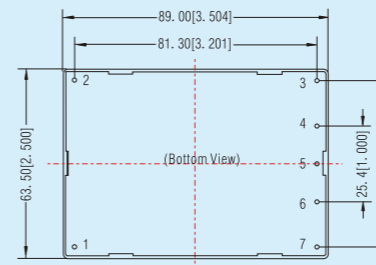
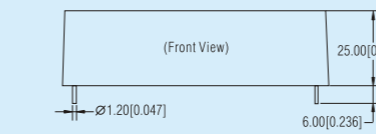


Pin-Out

Pin	LHE40-23B
1	AC(L)
2	AC(N)
3	Trim
4	No Pin
5	-Vo
6	No Pin
7	+Vo

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.50 [\pm 0.020]$

LHE60-23Bxx Series: LxWxH: 109.00x58.50x30.00(mm)

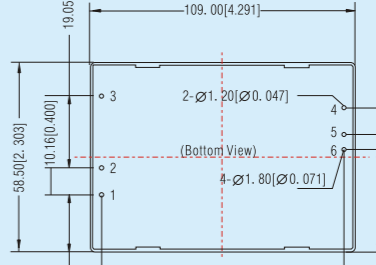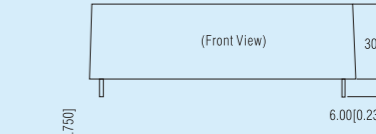


Pin-Out

Pin	LHE60-23B
1	AC(N)
2	AC(L)
3	⏏
4	Trim
5	-Vo
6	+Vo

Unit: mm[inch]
1, 2, 5, 6 Pin diameter 1.80[0.071], 3, 4 Pin diameter 1.20[0.047]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
Pin height tolerance: $\pm 1.50 [\pm 0.059]$
General tolerance: $\pm 0.50 [\pm 0.020]$

EMC Solution-recommended Circuit

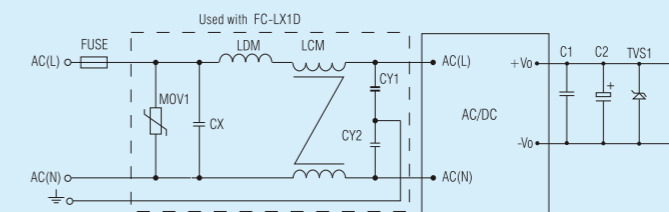

These series are suitable for special industrial outdoor environment (harsh environment)

5-60W standard package AC/DC converter LH/LHE series



Features

- Standard package, suitable for industrial control application requiring high EMC performance
- Input voltage range: 85-264VAC/100-370VDC
LH60-20Bxx-DT:55-264VAC/77-370VDC
- Operating temperature: -40°C to +85°C/-30°C to +70°C/-40°C to +70°C
- Isolation: 4000VAC(LH40:3000VAC)
- Efficiency up to 87%
- Low ripple & noise
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- EMI meets CISPR32/EN55032 CLASS B
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN62368 approval



Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo1/Io1)	Output Voltage/Current(Vo2/Io2)	Effi.(%) (typ)	Certification			
LHE05-20B03	4W	85-264VAC	3.3V/1250mA	---	70	cULus CB CE RoHS			
LHE05-20B05	5W	85-264VAC	5V/1000mA	---	75				
LHE05-20B09		85-264VAC	9V/550mA	---	77				
LHE05-20B12		85-264VAC	12V/420mA	---	79				
LHE05-20B15	5.5W	85-264VAC	15V/330mA	---	80		RoHS		
LHE05-20B24		85-264VAC	24V/230mA	---	82				
LHE05-20A05**	5W	85-264VAC	+5V/500mA	-5V/500mA	73			RoHS	
LHE05-20A12**		85-264VAC	+12V/210mA	-12V/210mA	77				
LHE05-20A15**		85-264VAC	+15V/160mA	-15V/160mA	77				
LHE05-20C0505-01		5.4W	85-264VAC	5V/800mA	±5V/100mA				70
LHE05-20C0512-01			85-264VAC	5V/600mA	±12V/100mA				73
LHE05-20C0515-01			85-264VAC	5V/600mA	±15V/80mA	74			
LHE05-20D0505-01		5W	85-264VAC	5V/900mA	5V/100mA	70			RoHS
LHE05-20D0512-01	85-264VAC		5V/750mA	12V/100mA	72				
LHE05-20D0515-01	85-264VAC		5V/700mA	15V/100mA	72				
LHE05-20D0524-01	85-264VAC		5V/600mA	24V/100mA	74				
LHE10-20B03	6.6W	85-264VAC	3.3V/2000mA	---	70	cULus CB CE RoHS			
LHE10-20B05	10W	85-264VAC	5V/2000mA	---	76				
LHE10-20B09		85-264VAC	9V/1100mA	---	78				
LHE10-20B12		85-264VAC	12V/900mA	---	80				
LHE10-20B15	10W	85-264VAC	15V/700mA	---	81		RoHS		
LHE10-20B24		85-264VAC	24V/450mA	---	82				
LHE10-20A05**	10W	85-264VAC	+5V/1000mA	-5V/1000mA	76			RoHS	
LHE10-20A12**		85-264VAC	+12V/450mA	-12V/450mA	80				
LHE10-20A15**		85-264VAC	+15V/350mA	-15V/350mA	81				
LHE10-20C0512-02		10W	85-264VAC	5V/1000mA	±12V/200mA				75
LHE10-20C0515-02			85-264VAC	5V/900mA	±15V/200mA				75
LHE10-20D0505-02			85-264VAC	5V/1800mA	5V/200mA	75			
LHE10-20D0512-02		10W	85-264VAC	5V/1500mA	12V/200mA	78			RoHS
LHE10-20D0515-02	85-264VAC		5V/1400mA	15V/200mA	79				
LHE10-20D0524-02	10W	85-264VAC	5V/1000mA	24V/200mA	80	RoHS			
LHE15-20B03	9.9W	85-264VAC	3.3V/3000mA	---	73		cULus CB CE RoHS		
LHE15-20B05	14W	85-264VAC	5V/2800mA	---	76				
LHE15-20B09		85-264VAC	9V/1600mA	---	78				
LHE15-20B12		85-264VAC	12V/1250mA	---	80				
LHE15-20B15	15W	85-264VAC	15V/1000mA	---	80			RoHS	
LHE15-20B24		85-264VAC	24V/625mA	---	83				

Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo1/Io1)	Output Voltage/Current(Vo2/Io2)	Effi.(%) (typ)	Certification			
LHE15-20A05**	15W	85-264VAC	+5V/1500mA	-5V/1500mA	76	RoHS			
LHE15-20A12**		85-264VAC	+12V/650mA	-12V/650mA	80				
LHE15-20A15**		85-264VAC	+15V/500mA	-15V/500mA	81				
LHE15-20C0505-05		15W	85-264VAC	5V/2000mA	±5V/500mA		75		
LHE15-20C0512-02			85-264VAC	5V/2000mA	±12V/200mA		77		
LHE15-20C0515-02			85-264VAC	5V/1800mA	±15V/200mA		78		
LHE15-20D0505-08		15W	85-264VAC	5V/2000mA	5V/800mA		76	RoHS	
LHE15-20D0512-04	85-264VAC		5V/2000mA	12V/400mA	78				
LHE15-20D0524-02	85-264VAC		5V/2000mA	24V/200mA	78				
LHE15-20D0524-04	85-264VAC		5V/1000mA	24V/400mA	80				
LHE20-20B03	11.55W	85-264VAC	3.3V/3500mA	---	73		cULus CB CE RoHS		
LHE20-20B05	15.5W	85-264VAC	5V/3100mA	---	77				
LHE20-20B09		85-264VAC	9V/2100mA	---	79				
LHE20-20B12		85-264VAC	12V/1600mA	---	81				
LHE20-20B15	20W	85-264VAC	15V/1300mA	---	82	RoHS			
LHE20-20B24		85-264VAC	24V/850mA	---	84				
LHE20-20A12**	20W	85-264VAC	+12V/830mA	-12V/830mA	82				RoHS
LHE20-20A15**		85-264VAC	+15/650mA	-15/650mA	83				
LHE20-20C0512-04		20W	85-264VAC	5V/2000mA	±12V/400mA			78	
LHE20-20C0515-03			85-264VAC	5V/2000mA	±15V/300mA			79	
LHE20-20D0512-06			85-264VAC	5V/2500mA	12V/600mA			78	
LHE20-20D0515-05		20W	85-264VAC	5V/2500mA	15V/500mA		78	RoHS	
LHE20-20D0524-03			85-264VAC	5V/2500mA	24V/300mA		78		
LHE25-20B03	13.53W	85-264VAC	3.3V/4100mA	---	74		cULus CB CE RoHS		
LHE25-20B05	20.5W	85-264VAC	5V/4100mA	---	79				
LHE25-20B09		85-264VAC	9V/2500mA	---	81				
LHE25-20B12		85-264VAC	12V/2100mA	---	83				
LHE25-20B15	25W	85-264VAC	15V/1600mA	---	84	RoHS			
LHE25-20B24		85-264VAC	24V/1100mA	---	85				
LHE25-20B48	25W	85-264VAC	48V/500mA	---	87				RoHS


Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo1/Io1)	Output Voltage/Current(Vo2/Io2)	Effi.(%) (typ)	Certification		
LHE40-20B03	26.4W	85-264VAC	3.3V/8000mA	---	78	CE RoHS		
LHE40-20B05		85-264VAC	5V/8000mA	---	82			
LHE40-20B12		85-264VAC	12V/3330mA	---	84			
LHE40-20B15	40W	85-264VAC	15V/2660mA	---	84		CE RoHS	
LHE40-20B24		85-264VAC	24V/1670mA	---	84			
LHE40-20B48	40W	85-264VAC	48V/830mA	---	84			CE RoHS

- Note: 1. Standard LHE series meet the requirements of surge level of ±1KV/2KV(level three). If the application requires higher performance for surge, our LH-ER2 series for ±2KV/4KV (level four) and recommended peripheral circuit for ±2KV/4KV(level four) are available;
 2. If the application requires higher performance for surge, our matching EMC auxiliary devices are available. For example, standard LHE(05-25) series with FC-LX1D reaches to ±2KV/4KV (level four);
 3. Detailed application please refer to datasheet.
 4. Products marked with "*"feature that Vo2 is the main circuit. Other products feature that Vo1 is the main circuit.
 5. LHE40 meet the requirements of surge immunity ±1KV/2KV without peripheral components; LHE40 can achieve ±2KV/4KV with the recommended peripheral circuit.
 6. LHE60 meet the requirements of surge immunity ±2KV/4KV without peripheral components; LHE60 can achieve ±4KV/6KV with the recommended peripheral circuit.

Package Dimension

LHE05/10/15/20 Series

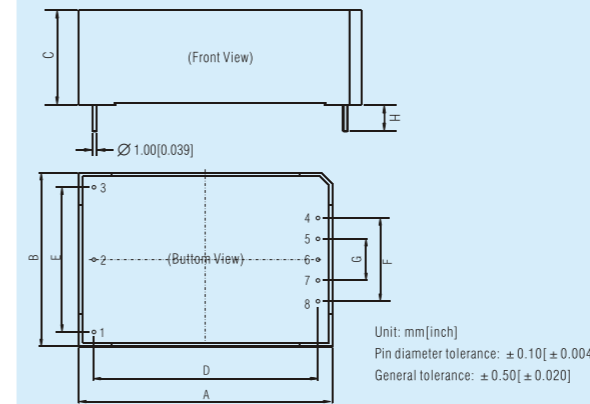


Pin-Out

Pin	LHE05-20B	LHE10-20B	LHE15-20B	LHE20-20B
1	AC(N)	AC(N)	AC(N)	AC(N)
2	AC(L)	AC(L)	AC(L)	AC(L)
3	+	+	+	+
4	-	-	-	-
5	No Pin	No Pin	No Pin	No Pin
6	No Pin	No Pin	No Pin	No Pin
7	No Pin	No Pin	No Pin	No Pin
8	-Vo	-Vo	-Vo	-Vo

Outline & Dimensions

NO.	LHE05	LHE10	LHE15	LHE20
A	48.50	55.00	62.00	62.00
B	36.00	45.00	45.00	45.00
C	20.50	21.00	22.50	22.50
D	40.50	47.00	54.00	54.00
E	25.00	35.00	35.00	35.00
F	16.00	20.00	20.00	20.00
G	10.00	10.00	10.00	10.00
H	6.00	6.00	6.00	6.00


LHE25 Series: LxWxH: 70.00x48.50x23.50(mm)

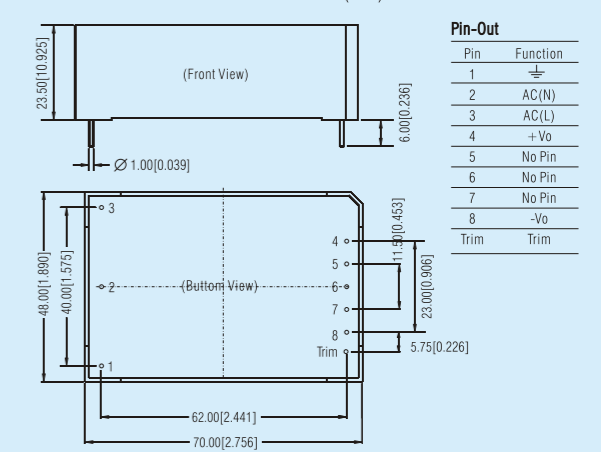

Pin	Function
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo
5	No Pin
6	No Pin
7	No Pin
8	Trim

Package Dimension

LHE05-20A/C/Dxx Series: LxWxH: 48.50x36.00x20.50(mm)

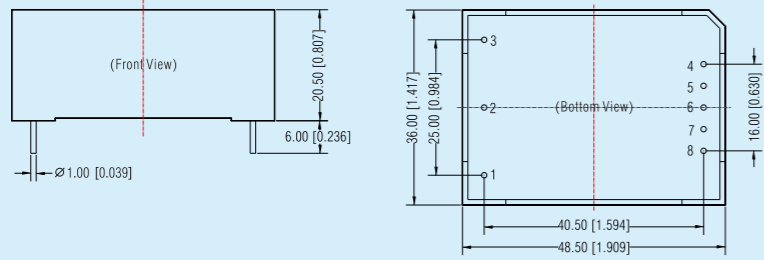


Pin-Out

Pin	LHE05-20A	LHE05-20C	LHE05-20D
1	⏏	⏏	⏏
2	AC(N)	AC(N)	AC(N)
3	AC(L)	AC(L)	AC(L)
4	+Vo	+Vo2	+Vo2
5	No Pin	COM	-Vo2
6	COM	-Vo2	No Pin
7	No Pin	+Vo1	+Vo1
8	-Vo	-Vo1	-Vo1

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

LHE10-20A/C/Dxx Series: LxWxH: 55.00x45.00x21.00(mm)

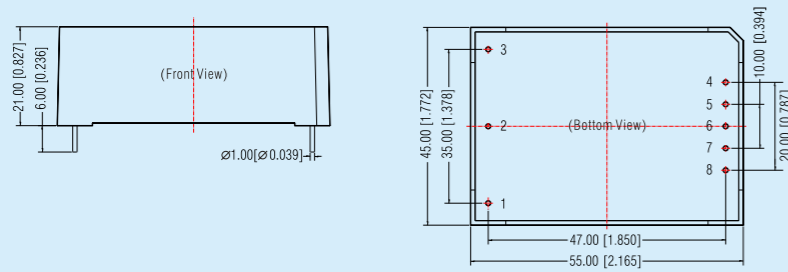


Pin-Out

Pin	LHE10-20A	LHE10-20C	LHE10-20D
1	⏏	⏏	⏏
2	AC(N)	AC(N)	AC(N)
3	AC(L)	AC(L)	AC(L)
4	+Vo	+Vo2	+Vo2
5	No Pin	COM	-Vo2
6	COM	-Vo2	No Pin
7	No Pin	+Vo1	+Vo1
8	-Vo	-Vo1	-Vo1

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

LHE15-20A/C/Dxx Series: LxWxH: 62.00x45.00x22.50(mm)

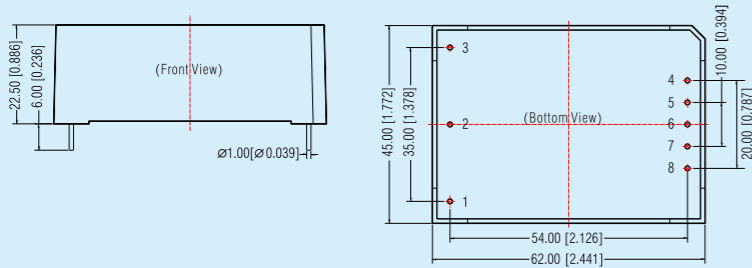


Pin-Out

Pin	LHE15-20A	LHE15-20C	LHE15-20D
1	⏏	⏏	⏏
2	AC(N)	AC(N)	AC(N)
3	AC(L)	AC(L)	AC(L)
4	+Vo	+Vo2	+Vo2
5	No Pin	COM	-Vo2
6	COM	-Vo2	No Pin
7	No Pin	+Vo1	+Vo1
8	-Vo	-Vo1	-Vo1

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

LHE20-20A/C/Dxx Series: LxWxH: 70.00x48.00x23.50(mm)

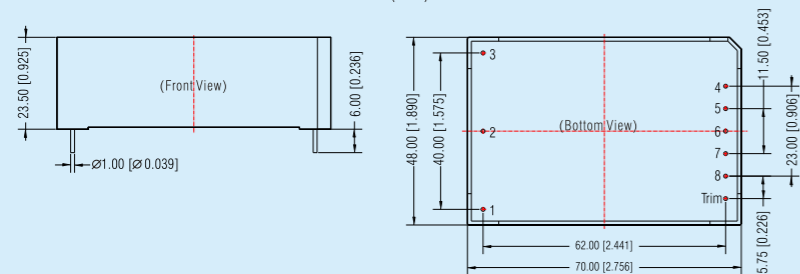


Pin-Out

Pin	LHE20-20A	LHE20-20C	LHE20-20D
1	⏏	⏏	⏏
2	AC(N)	AC(N)	AC(N)
3	AC(L)	AC(L)	AC(L)
4	+Vo	+Vo2	+Vo2
5	No Pin	COM	-Vo2
6	COM	-Vo2	No Pin
7	No Pin	+Vo1	+Vo1
8	-Vo	-Vo1	-Vo1
Trim	No Pin	No Pin	No Pin

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

Package Dimension

40W Package Dimension LxWxH: 89.00x63.50x25.00(mm)




Pin-Out

Pin	LH40-10A	LH40-10B	LH40-10D
1	AC(L)	AC(L)	AC(L)
2	AC(N)	AC(N)	AC(N)
3	+Vo	+Vo	+Vo2
4	No Pin	No Pin	+Vo1
5	COM	-Vo	-Vo2
6	No Pin	No Pin	-Vo1
7	-Vo	Trim	No Pin

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

Note: A5 chassis mounting and A6 DIN-Rail mounting are available and please refer to datasheet for details.

60W Package Dimension LxWxH: 109.00x58.50x30.00(mm)

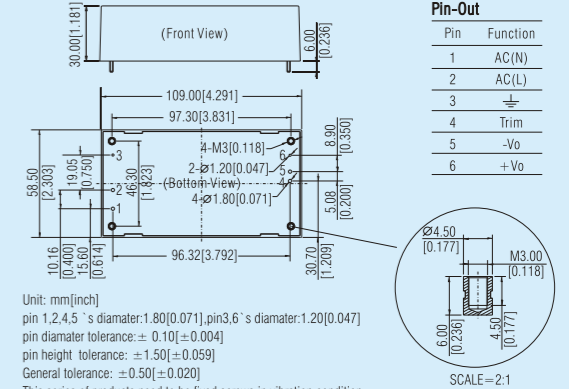


Pin-Out

Pin	Function
1	AC(N)
2	AC(L)
3	⏏
4	Trim
5	-Vo
6	+Vo


Unit: mm[inch]
pin 1,2,4,5's diameter: 1.80[0.071], pin 3,6's diameter: 1.20[0.047]
pin diameter tolerance: ±0.10[±0.004]
pin height tolerance: ±1.50[±0.059]
General tolerance: ±0.50[±0.020]
This series of products need to be fixed screws in vibration condition.

SCALE=2:1

EMC Solution-recommended Circuit

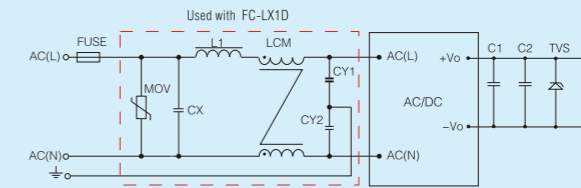

e.g.: LH60-20Bxx, for others please refer to datasheet.

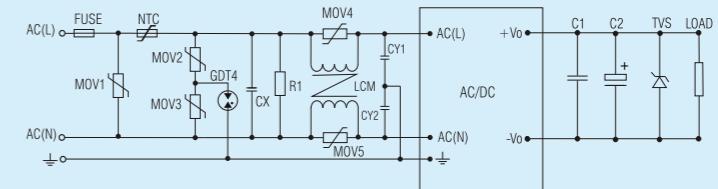

These series are suitable for industrial outdoor environment

30W four outputs metal mask LM series specialized for protective relaying system

RoHS

Features


- EMC: EMI CLASS B; $\pm 2KV/4KV$ surge (level 4)
- Input voltage range: 85-264VAC/100-370VDC
- Isolation: 2000VAC
- Low standby power consumption, high efficiency
- Low ripple & noise
- Multiplexed outputs, metal mask
- Output short-circuit, over-current and over-voltage protections

Product Program


Model Number	Power	Input Voltage Range	Output Voltage (VDC)	Certification
LM30-00J0512-03E	30W	85-264VAC, 100-370VDC	5/ $\pm 12/24$	RoHS

Note: 1. LM series meet the requirements of $\pm 2KV/4KV$ surge level (level four). If the application requires higher performance for surge, our recommended peripheral circuit for $\pm 4KV/6KV$ is available;
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, series with FC-L01D2 reaches to $\pm 4KV/6KV$;
3. Detailed application please refer to datasheet.

EMC Solution-recommended Circuit

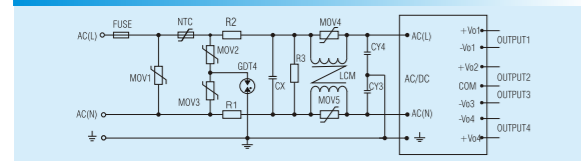

Package Dimension LxWxH: 105.00x70.00x24.50(mm)

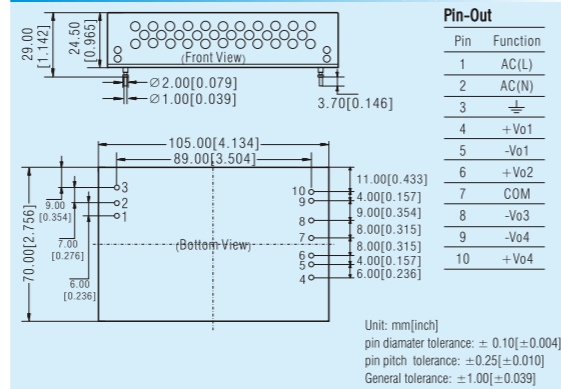

These series are suitable for special industrial indoor environment

5-8W compact size LD-MU series for medical

RoHS

Features


- EN60601-1, ANSI/AAMI ES60601-1 approval (2xMOPP)
- Input voltage range: 85-264VAC/100-370VDC
- Operating temperature: $-25^{\circ}C$ to $+70^{\circ}C$
- Isolation: 4000VAC
- Ripple & noise: 50mV(Typ.)
- Optional packages: PCB mounting
- Output short-circuit, over-current and over-voltage protections

Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Certification
LD05-20B05MU	5W	85-264VAC	5V/1000mA	76	RoHS
LD05-20B12MU		85-264VAC	12V/420mA	80	
LD05-20B15MU		85-264VAC	15V/333mA	81	
LD05-20B24MU	5.5W	85-264VAC	24V/230mA	81	RoHS
LD08-20BY4-US	7.6W	85-264VAC	3.8V/2000mA	74	

Note: 1. LD05-20BxxMU series meet the requirements of $\pm 1KV/2KV$ surge level. If the application requires $\pm 2KV/4KV$, our EMC solution-recommended circuit is available as follows;
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, series with FC-LX1D reaches to $\pm 2KV/4KV$;
3. Detailed application please refer to datasheet.

EMC Solution-recommended Circuit

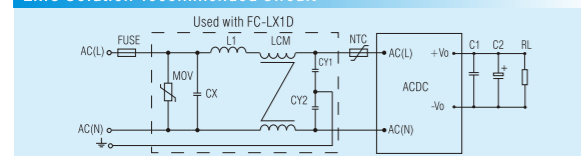

Package Dimension LxWxH: 53.80x28.80x19.00(mm)

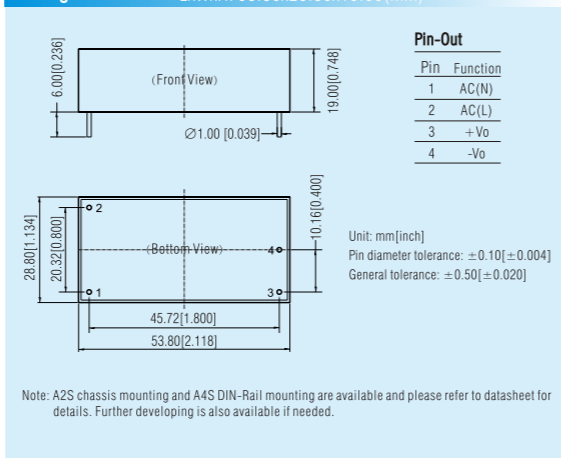

These series are suitable for special industrial indoor environment

15-25W low power consumption AC/DC LH-MU series for medical

RoHS

Features

- IEC60601-1, EN60601-1, ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1 approval (2xMOPP)
- Input voltage range: 85-264VAC/100-370VDC
- Operating Temperature: $-40^{\circ}C$ to $+70^{\circ}C$
- Isolation: 4000VAC
- Meet 5000m altitude requirements
- Low standby power consumption: $< 0.1W$
- Low leakage current: $< 100uA$
- Output short-circuit, over-current and over-voltage protections
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting (TS35)

Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Certification
LH15-20B05MU	14W	85-264VAC	5V/2800mA	78	RoHS
LH15-20B12MU	15W	85-264VAC	12V/1250mA	83	
LH15-20B15MU		85-264VAC	15V/1000mA	83	
LH15-20B18MU	20.5W	85-264VAC	18V/833mA	84	RoHS
LH15-20B24MU		85-264VAC	24V/625mA	86	
LH25-20B05MU	25W	85-264VAC	5V/4100mA	82	RoHS
LH25-20B12MU		85-264VAC	12V/2100mA	88	
LH25-20B15MU		85-264VAC	15V/1600mA	88	
LH25-20B18MU	25W	85-264VAC	18V/1400mA	88	RoHS
LH25-20B24MU		85-264VAC	24V/1100mA	89	

Note: LH-MU series meet the requirements of $\pm 1KV/2KV$ surge level (level three). If the application requires higher performance, our EMC solution-recommended circuit is available.



Package Dimension

LH15-20BxxMU Series: LxWxH: 70.00x48.00x23.50(mm)

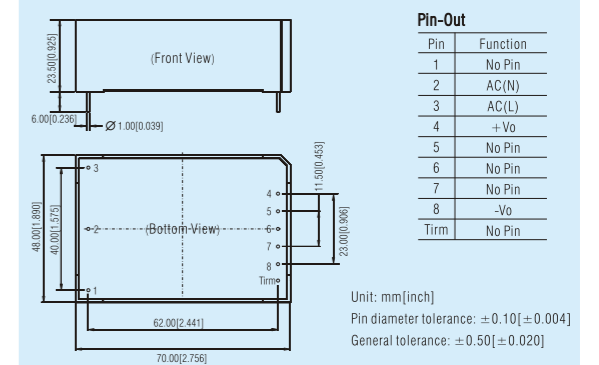

Note: A2S chassis mounting and A4S DIN-Rail mounting are available and please refer to datasheet for details.

These series are suitable for commercial indoor environment

3-65W cost-effective open frame AC/DC converter LO series

Features

- Input voltage range: 85-264VAC/100-370VDC
LO05:165-264VAC/230-370VDC
- Operating temperature: -25°C to +70°C
- Isolation: 3000VAC
- Regulated output, Low ripple & noise
- Output short-circuit, overcurrent protections
- High efficiency, high reliability
- EMI meets CISPR32/EN55032 CLASS B
- 45-65W series meet IEC/EN/UL62368 standards
15-30W series meet IEC/EN/UL62368, EN60335 standards
- 2 years warranty(LO30:3 years warranty)




Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
LO03-10B03	2.3W	85-264VAC	3.3V/700mA	69	RoHS
LO03-10B05	3W	85-264VAC	5V/600mA	73	
LO03-10B09		85-264VAC	9V/330mA	76	
LO03-10B12		85-264VAC	12V/250mA	78	
LO03-10B15		85-264VAC	15V/200mA	78	
LO03-10B24		85-264VAC	24V/125mA	79	
LO05-12B03	3.3W	165-264VAC	3.3V/1000mA	66	RoHS
LO05-12B05	5W	165-264VAC	5V/1000mA	73	
LO05-12B09		165-264VAC	9V/550mA	75	
LO05-12B12		165-264VAC	12V/420mA	77	
LO05-12B15		165-264VAC	15V/330mA	77	
LO05-12B24		165-264VAC	24V/210mA	79	
LO15-10B03	9W	85-264VAC	3.3V/3000mA	72	RoHS
LO15-10B05	14W	85-264VAC	5V/2800mA	76	
LO15-10B09	15W	85-264VAC	9V/1600mA	78	
LO15-10B12		85-264VAC	12V/1250mA	81	
LO15-10B15		85-264VAC	15V/1000mA	81	
LO15-10B24	85-264VAC	24V/625mA	82		
LO30-10B03	13.5W	85-264VAC	3.3VDC/4100mA	73	RoHS
LO30-10B05	20.5W	85-264VAC	5VDC/4100mA	78	
LO30-10B09	30W	85-264VAC	9VDC/3333mA	82	
LO30-10B12		85-264VAC	12VDC/2500mA	84	
LO30-10B15		85-264VAC	15VDC/2000mA	86	
LO30-10B24		85-264VAC	24VDC/1250mA	87	
LO30-10B48	85-264VAC	48VDC/625mA	88		
LO45-10B03	26.4W	85-264VAC	3.3V/8000mA	76	RoHS
LO45-10B05	40W	85-264VAC	5V/8000mA	82	
LO45-10B09	45W	85-264VAC	9V/4444mA	84	
LO45-10B12		85-264VAC	12V/3750mA	84	
LO45-10B15		85-264VAC	15V/3000mA	86	
LO45-10B24	85-264VAC	24V/1875mA	86		
LO45-10B48	85-264VAC	48V/940mA	87		
LO65-10B05	50W	85-264VAC	5V/10000mA	80	RoHS
LO65-10B09	60W	85-264VAC	9V/6600mA	83	
LO65-10B12	65W	85-264VAC	12V/5420mA	85	
LO65-10B15		85-264VAC	15V/4340mA	85	
LO65-10B24		85-264VAC	24V/2710mA	87	
LO65-10B48	85-264VAC	48V/1360mA	87		

Package Dimension

LO03-10Bxx/LO05-12Bxx Series: LxWxH: 42.00x16.00x17.00(mm)

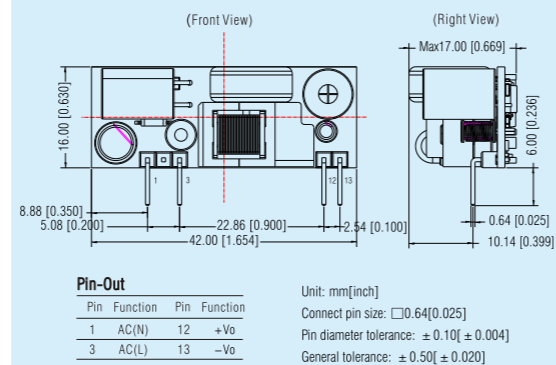


LO15-10Bxx Series: LxWxH: 63.50x45.70x19.00(mm)

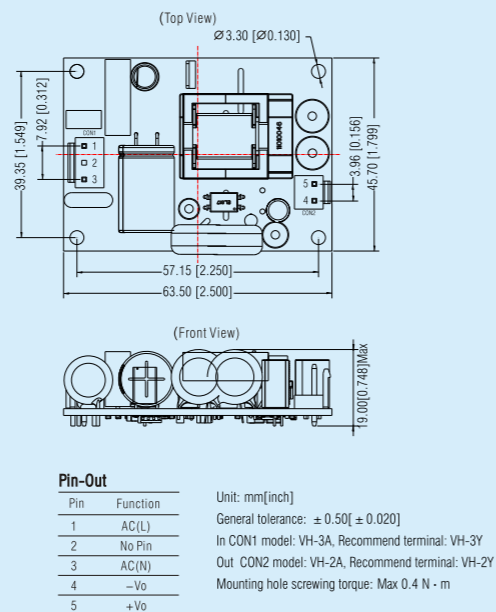


Package Dimension

LO30-10Bxx Series: LxWxH: 76.20x50.80x27.00(mm)

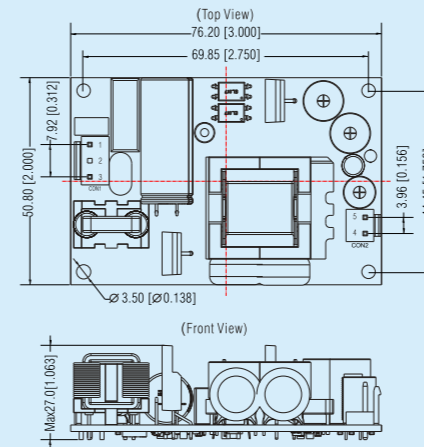

LO45-10Bxx/LO65-10Bxx Series: LxWxH: 76.20x50.80x30.00(mm)

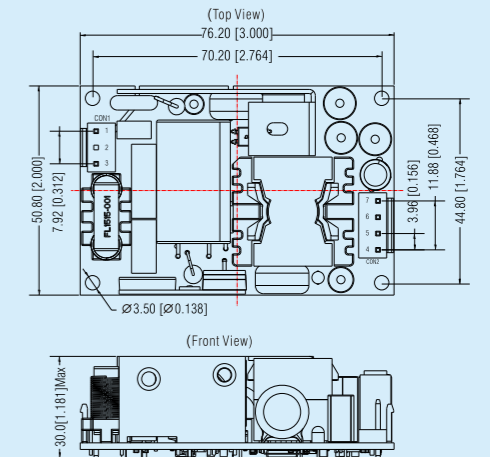

These series are suitable for industrial indoor environment

10W seven outputs open frame LO series specialized for flow meter

Features

- Seven outputs specialized for flow meter application, various outputs customization acceptable
- Input voltage range: 85-264VAC, 50/60HZ
- Isolation: 3000VAC
- Low ripple & noise
- EMC: Conduction/Radiation: CLASS B, Burst/Surge: level 4
- Output short-circuit protection

Product Program

Model Number	Power	Input Voltage Range	Output Available (Vo1/Vo2/Vo3)	Output Available (Vo4/Vo5)	Output Available (Vo6/Vo7)
LO10-10J	10W	85-264VAC/120-370VDC	Triple outputs (3.3V-24V) available	Positive and negative voltage ($\pm 5V$ to $\pm 24V$) available	Positive and negative voltage ($\pm 5V$ to $\pm 70V$) available

Note: Seven or less outputs products customization is acceptable. For more information, please contact our sales department.

Package Dimension LxWxH: 94.50x90.00x15.00(mm)

Pin-Out

Pin	Function	Pin	Function
1	+Vo3	2	-Vo3
3	No Pin	4	No Pin
5	+Vo2	6	-Vo2
7	+Vo6	8	COM
9	-Vo7	10	COM
11	+Vo4	12	COM
13	-Vo5	14	COM
15	NC	16	NC
17	GND	18	-Vo1
19	+Vo1	20	AC(L)
21	AC(N)		

Unit: mm[inch]
General tolerance: $\pm 0.50[\pm 0.020]$

RoHS



These series are suitable for industrial outdoor environment

10-15W dual outputs 528V input voltage open frame LO series specialized for electric power

Features

- four-wire system available
- Ultra-wide input voltage range: 57-528VAC/80-745VDC
- EMC: Burst/Surge: level 4
- Conduction/Radiation: CLASS B
- Output short-circuit, over-current and over-voltage protections
- Multiple outputs, customization acceptable

Product Program

Model Number	Power	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Effi(%) (typ)	Certification
LO10-26D0512-04L	10.92W	5.1V/1.2A	12V/0.4A	78	RoHS
LO15-26D1212-03	13.2W	12V/0.8A	12V/0.3A	77	
LO15-26D1305-03	15W	13.5V/1.0A	5V/0.3A	78	

Note: 1. 05V/24A and 05V/15A outputs customization is acceptable.
2. If the application requires higher performance for EMC, our recommended peripheral circuit is available.

Package Dimension LxWxH: 80.00x40.00x35.00(mm)

Pin Name Function Define

1	AC(L)	AC voltage line wire(s) or DC voltage positive
2	AC(N)	AC voltage neutral wire(s) or DC voltage negative
3	+Vo2	The second output positive(+)
4	-Vo2	The second output negative(-)
5	+Vo1	The first output voltage positive(+)
6	-Vo1	The first output voltage negative(-)

Unit: mm[inch]
General tolerance: $\pm 0.50[\pm 0.020]$
FR-4, 1.6mm thick double sided glass fiber PCB

RoHS



These series are suitable for industrial outdoor environment

10W open frame LO series specialized for electric power

Features

- Specialized for electric-meter application, EMI CLASS B with $\pm 2KV$ surge
- Input voltage range: 30-280VAC/30-400VDC
- Isolation: 4000VAC
- High efficiency, high reliability
- Low ripple & noise, low standby power consumption
- Long-longevity, low-impedance electrolytic capacitors
- Output short-circuit and over-voltage protections
- Gild pin, customization acceptable

Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Certification
LO10-24B05K	6W	30-280VAC, 30-400VDC	5V/1200mA	71	RoHS
LO10-24B12K	6.6W	30-280VAC, 30-400VDC	12V/550mA	77	
LO10-24B13K	6.5W	30-280VAC, 30-400VDC	13V/500mA	77	

Note: 3.3-48V output customization is acceptable.

Package Dimension LxWxH: 80.00x40.00x30.00(mm)

Pin-Out

Pin	Function
1	AC(L)
2	AC(N)
3	NC
4	No Pin
5	OUT1-
6	OUT1+

Unit: mm[inch]
General tolerance: $\pm 0.50[\pm 0.020]$
FR-4, 1.6mm thick double sided glass fiber PCB
0.40mm black MYLAR insulating sheet material

RoHS



These series are suitable for industrial outdoor environment

20-30W three outputs open frame AC/DC converters specialized for AC charging station

Features

- Input voltage range: LO20:165-264VAC/230-370VDC
LO30:85-264VAC/100-370VDC
- Isolation: 3000VAC
- Three outputs, high accuracy
- Efficiency up to 78%
- Output short-circuit, over-current and over-voltage protections
- Safety Class: CLASS II
- Meet IEC 60950

Product Program

Model Number	Power	Output Voltage /current (Vo1/Io1)	Output Voltage /Current (Vo2/Io2) (-Vo2/-Io2)	Effi(%) (typ)	Certification
LO20-10C0512-01	18.7W	5V/500mA	12V/1200mA -12V/150mA	78	RoHS
LO30-10C0512-12	31.2W	5V/3000mA	12V/1200mA -12V/150mA	78	RoHS

This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com


RoHS




This catalog is used to introduce our latest products, for more information, please contact our sales department

Package Dimension

L020-10C0512-01: LxWxH: 70.00x48.00x23.50(mm)

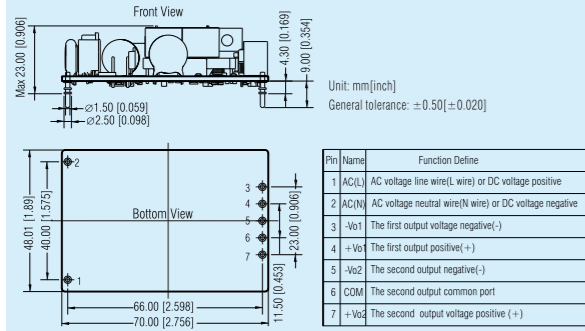

L030-10C0512-12: LxWxH: 97.00x50.00x28.00(mm)

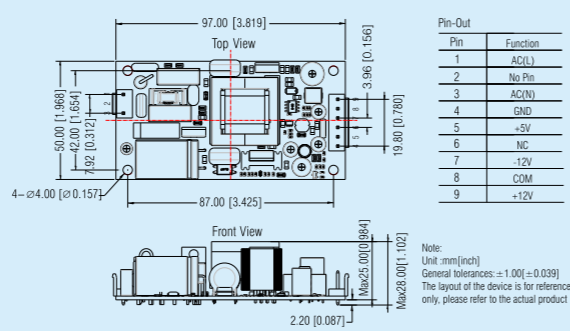

These series are suitable for industrial outdoor environment

10-25W LH-ER2 series specialized for electric power

Features

- Specialized for electric power application, excellent EMS performance with ±2KV/±4KV surge(level four)
- Input voltage range: 85-264VAC/100-370VDC
- Isolation: 3000VAC/4000VAC (LHE10)
- Efficiency up to 85%
- Safety Class: CLASS I
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit and over-current protections



A2 Chassis Mounting


A4 DIN-Rail Mounting

Product Program


Model Number	Power	Output Voltage/Current(Vo1/Io1)	Output Voltage/Current(Vo2/Io2)	Effi(%) (typ)	Certification
LH10-10B05ER2	10W	5V/2000mA	---	74	RoHS
LH10-10B12ER2		12V/900mA	---	79	
LH10-10B24ER2		24V/450mA	---	81	
LH10-10D0505-02ER2		5V/1800mA	5V/200mA	75	
LHE10-20D0512-02ER2		5V/1500mA	12V/200mA	77	
LHE10-20D0524-02ER2	5V/1000mA	24V/200mA	77	RoHS	
LH15-10B05ER2	15W	5V/2800mA	---		76
LH15-10B12ER2		12V/1250mA	---		80
LH15-10B24ER2		24V/650mA	---		83
LH15-10D0512-04ER2		5V/2000mA	12V/400mA		80
LH15-10D0524-02ER2	5V/2000mA	24V/200mA	80	RoHS	
LH25-10B05ER2	25W	5V/4100mA	---		79
LH25-10B12ER2		12V/2100mA	---		83
LH25-10B15ER2		15V/1600mA	---		84
LH25-10B24ER2		24V/1100mA	---	85	

Note: 1. LHxx-10BxxER2 and LHxx-10DxxER2 series meet the requirements of ±2KV/4KV surge level (level four).
If application requires for ±4KV/6KV, our EMC solution-recommended circuit is available as follows:
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, series with FC-L01D2 reaches to ±4KV/6KV;
3. Detailed application please refer to datasheet.

Package Dimension

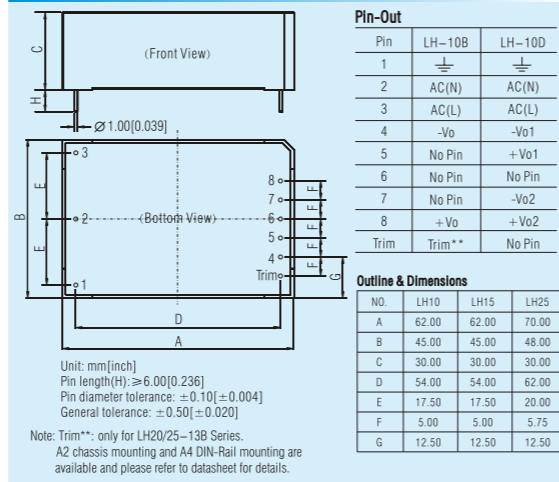

EMC Solution-recommended Circuit

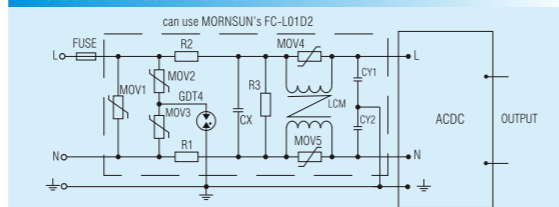

These series are suitable for special industrial outdoor environment (harsh environment)

300W 165-264VAC input AC/DC battery charging module power supply

RoHS

Features

- It is specialized for distribution automation system. It has battery charge function and can be used to charge the lead-acid battery. It is also suitable for applications in distribution automation system, intelligent box transformer substation, ring main unit.
- Operating temperature: -40°C to +70°C
- Efficiency up to 80%
- Low stand-by power consumption, meets the requirements of DL/T721-2013 standards.
- Output over-current, over-voltage protections
- With charge and discharge management, battery activation
- Chassis mounting




Product Program

Model Number	Long term power	Instantaneous power	Load voltage /current	Float voltage /charge current	Certification
MBP300-2A27D27M	40.5W	270W/15s, 432W/1s	27V/1A	27V/0.5A	RoHS

Note: customization is available.

Package Dimension

MBP300-2A27D27M LxWxH: 168.00x79.00x30.00(mm)

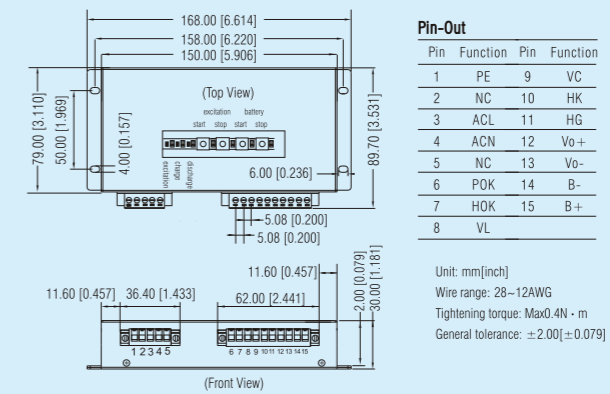

These series are suitable for commercial indoor environment Bus power supply for smart building

KNX RoHS
(pending)

Features

- Input voltage range: 180-264VAC/254 - 370VDC
- Operating temperature: -30°C to +70°C
- Isolation: 4000VAC
- Output short-circuit, over-current and over-voltage protections
- Meet EN61558、UL1310 standards
- Easy to install with the DIN-Rail design




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
KNX20-22A640	19.2W	180-264VAC	30V/640mA	86	KNX (pending) RoHS

Package Dimension

KNX20-22A640: LxWxH: 90.00x52.00x58.00(mm)

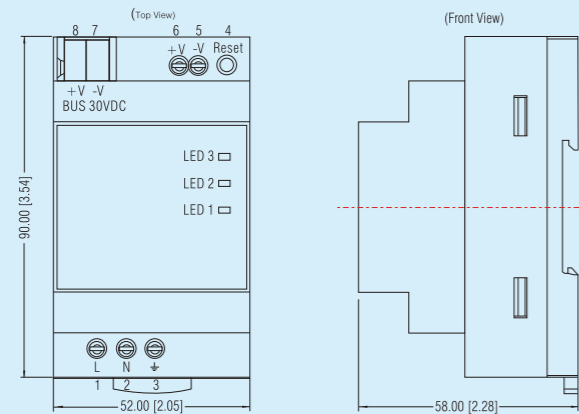

Pin-Out

Pin	Function	Pin	Function
1	L	4	Reset
2	N	5	-Vo
3	PE	6	+Vo
LED1	NC	7	KNX Nus -Vo2
LED1	NC	8	KNX Nus +Vo2
LED1	NC		

Unit: mm[inch]
General tolerance: ±1.0[±0.039]

These series are suitable for industrial indoor environment 30-100W ladder-shaped AC/DC DIN-Rail power supply

CE RoHS

Features

- Suitable for building automation and factory automation applications
- Input voltage: 85-264VAC/120-370VDC
- Operating temperature: -40°C to +70°C
- Isolation: 4000VAC
- Over-voltage class III (designed to meet EN61558 safety standards)
- Output short circuit, over-current, over-voltage protections
- EN62368 approval




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
LI30-20B05PR2	15W	85-264VAC	5V/3A	82	CE RoHS
LI30-20B12PR2	24W	85-264VAC	12V/2A	88	
LI30-20B15PR2	30W	85-264VAC	15V/2A	89	
LI30-20B24PR2	36W	85-264VAC	24V/1.5A	89	
LI30-20B48PR2	36W	85-264VAC	48V/0.75A	90	CE RoHS
LI60-20B05PR2	33W	85-264VAC	5V/6.5A	84	
LI60-20B12PR2	54W	85-264VAC	12V/4.5A	88	
LI60-20B15PR2	60W	85-264VAC	15V/4.0A	89	
LI60-20B24PR2	60W	85-264VAC	24V/2.5A	90	CE RoHS
LI60-20B48PR2	60W	85-264VAC	48V/1.25A	91	
LI100-20B12PR2	90W	85-264VAC	12V/7.5A	88	
LI100-20B15PR2	97.5W	85-264VAC	15V/6.5A	89	
LI100-20B24PR2	100.8W	85-264VAC	24V/4.2A	90	CE RoHS
LI100-20B48PR2	100.8W	85-264VAC	48V/2.1A	90	

Package Dimension

LI30-20BxxPR2 Series: LxWxH: 92.66x35.00x58.00(mm)


LI60-20BxxPR2 Series: LxWxH: 92.66x52.00x58.00(mm)

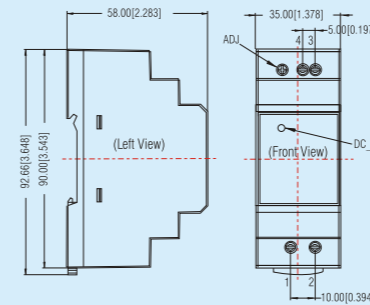

Pin-Out

Pin	LI30-20B
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

Unit: mm[inch]
ADJ: adjustable resistance to change
Wire diameter: 24~12AWG
Tightening torque: Max 0.4 N · m
Mounting rail: TS35
Pin section tolerances: ±1.00[±0.039]

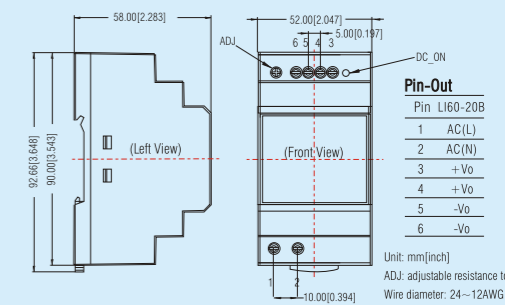


Pin-Out

Pin	LI60-20B
1	AC(L)
2	AC(N)
3	+Vo
4	+Vo
5	-Vo
6	-Vo

Unit: mm[inch]
ADJ: adjustable resistance to change
Wire diameter: 24~12AWG
Tightening torque: Max 0.4 N · m
Mounting rail: TS35
Pin section tolerances: ±1.00[±0.039]

LI100-20BxxPR2 Series: LxWxH: 92.66x70.00x58.00(mm)

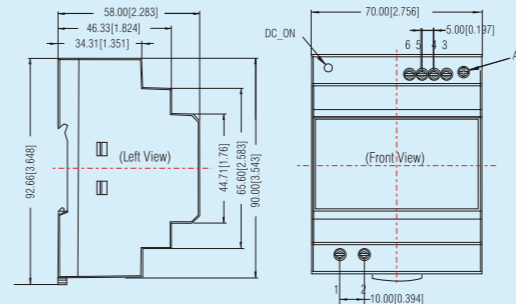

Pin-Out

Pin	LI30-20B
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

Unit: mm[inch]
ADJ: adjustable resistance to change
Wire diameter: 24~12AWG
Tightening torque: Max 0.4 N · m
Mounting rail: TS35
Pin section tolerances: ±1.00[±0.039]

These series are suitable for industrial outdoor environment

75-120W DIN35 package AC/DC DIN-Rail power supply

CE RoHS

Features

- Great power DIN-Rail power supply, suitable for industrial control, instrumentation and railway applications
- Input voltage: LI75-20BxxR2: 90-264VAC/120-373VDC
LI120-20BxxR2: 90-264VAC/127-373VDC
LI120-13B: 85-305VAC/100-430VDC
- Operating temperature: -30°C to +70°C/-20°C to +60°C/-25°C to +70°C
- Isolation: 3000VAC/4000VAC
- Input under-voltage, output short circuit, over-current, over-voltage and over-temperature protections
- Meet IEC/UL/EN 62368, EN60335, GB4943 standards




Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification
LI75-20B12R2	75.6W	90-264VAC	12V/6.3A	86	CE (pending) RoHS
LI75-20B24R2	76.8W	90-264VAC	24V/3.2A	89	
LI75-20B48R2	76.8W	90-264VAC	48V/1.6A	90	
LI120-20B12R2	120W	90-264VAC	12V/10A	85	CE (pending) RoHS
LI120-20B24R2		90-264VAC	24V/5A	88	
LI120-20B48R2		90-264VAC	48V/2.5A	89	
LI120-13B12	120W	85-305VAC	12V/10A	89	RoHS
LI120-13B24		85-305VAC	24V/5A	91	

Package Dimension

LI75-20BxxR2 series: LxWxH: 30.00x128.00x120.00(mm)

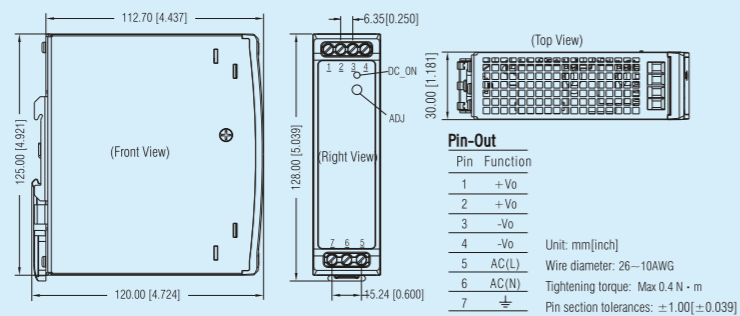

LI120-20BxxR2/LI120-13Bxx series: LxWxH: 35.00x128.00x120.00(mm)

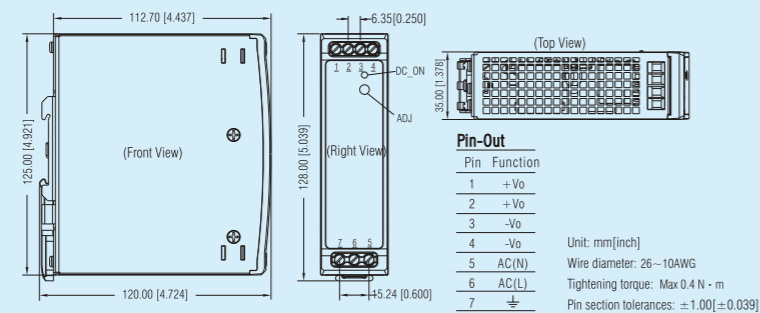

• This catalog is used to introduce our latest products, for more information, please contact our sales department

These series are suitable for industrial outdoor environment

Parallel redundancy power supply

CE RoHS

Features

- Input voltage range: 22-60VDC
- Operating temperature: -40°C to +80°C
- High efficiency, 1500VAC insulation voltage
- Two input status indicators, relay contact signal input
- Meet IEC/EN/UL62368 standards
- Level III Voltage (meet EN61558)
- Meet 5000m altitude requirements
- Support N+1 parallel redundancy
- 10 year warranty


Product Program

Model Number	Input Voltage Range(Vin)	Output Voltage (Vo/typ)	Current (Io)	Effi (%) (typ)	Certification
LIR-20	22-60VDC	Vin-0.65V	20A	97	CE RoHS (pending)



Package Dimension

LIR-20: LxWxH: 125.00x35.00x120.00(mm)

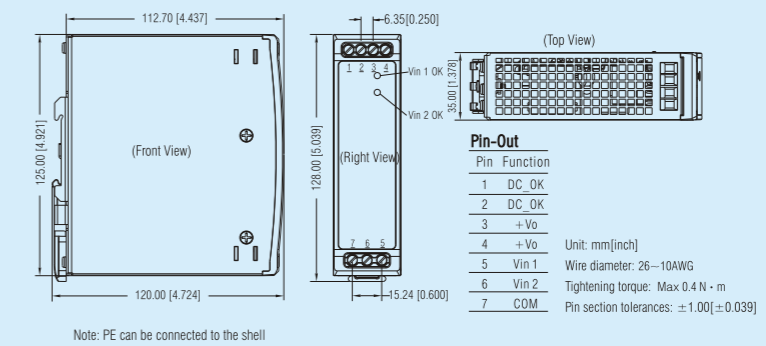

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

These series are suitable for special industrial outdoor environment (Ocean)

80-150W AC/DC LI series specialized for marine engineering device

RoHS

Features

- High reliability power supply specialized for electrical system in marine engineering device
- Ultra-wide input voltage: 85-305VAC/100-430VDC
- Isolation: 3000VAC
- Operating temperature: -25°C to +70°C
- Output short circuit, over-voltage, over-current protections
- Reliable process design, meets requirement of salt spray test




Product Program

Model Number	Power	Input Voltage Range	Nominal Output Voltage/Current(Vo/Io)			Effi (230VAC, %/typ)	Max. Capacitive Load (μF)			Certification
			(Vo1/Io1)	(Vo2/Io2)	(Vo3/Io3)		Vo1	Vo2	Vo3	
LI80-13C2412-10-ZX	77W	85-305VAC/100-430VDC	24V/2.5A	12V/1.0A	5V/1.0A	84	4000	1600	1600	RoHS
LI120-10B24-ZX	120W	85-264VAC/100-370VDC	24V/5A	/	/	91	4700	/	/	
LI150-13B29	150W	85-305VAC/100-430VDC	29V/5.2A	/	/	85	4000	/	/	

Package Dimension


LI80-13C-ZX series: LxWxH: 149.00x132.00x35.50(mm)

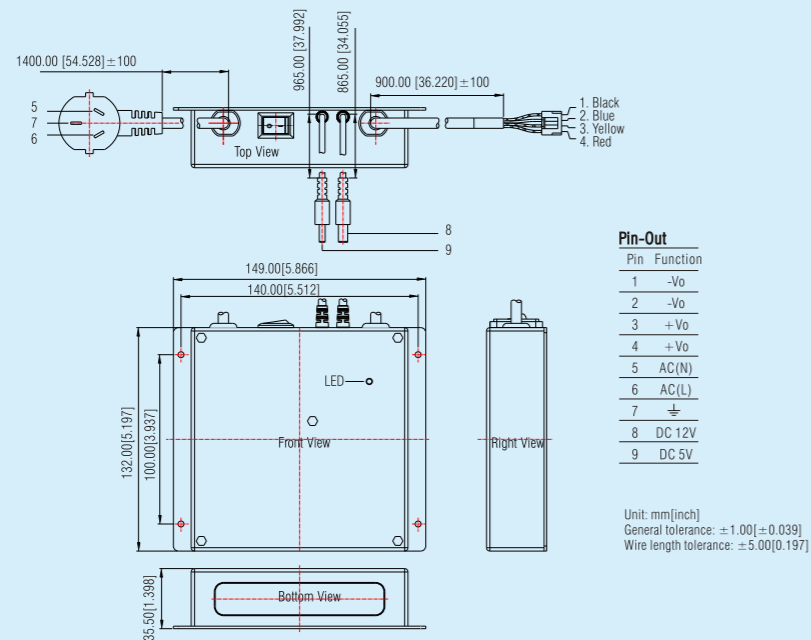


• This catalog is used to introduce our latest products, for more information, please contact our sales department

Package Dimension

LI120-10B-ZX series: LxWxH: 149.00x132.00x35.50(mm)

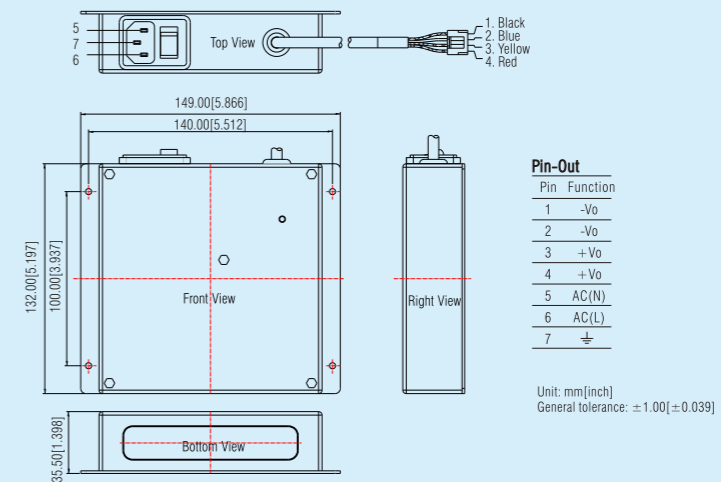

LI150-13B series: LxWxH: 149.00x132.00x35.50(mm)

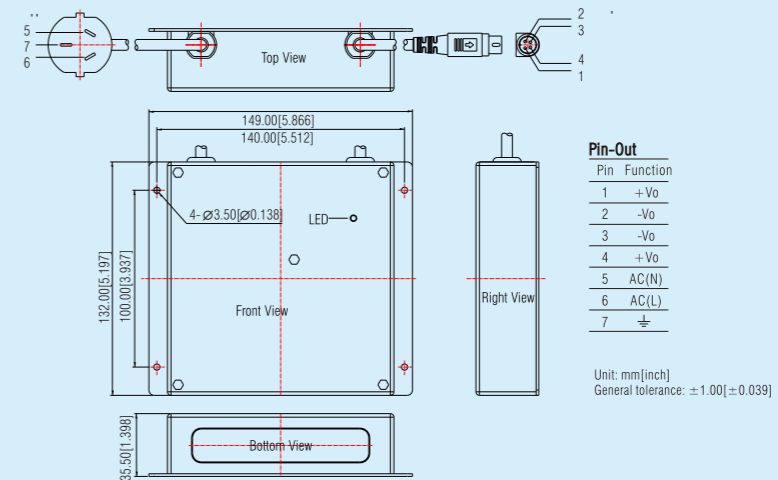

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

These series are suitable for special industrial outdoor environment (harsh environment)

40-120W 85-900VAC ultra-wide, ultra-high input voltage series specialized for mining industry

RoHS

Features

- Specialized for electrical equipment in mining industry
- Ultra-wide input voltage: 85 - 900VAC
- Operating temperature: -25°C to +70°C
- Isolation: 4000VAC
- High reliability, high efficiency, long life span
- Output short circuit, over-current, over-voltage protections
- Immunity, EFT/Surge: ±4KV perf. Criteria B




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
PVA40-27B18	40W	85-900VAC	18V/2222mA	86	RoHS
PVA40-27B24		85-900VAC	24V/1667mA	86	
PVA40-27B30		85-900VAC	30V/1333mA	86	
PVA70-27B24	70W	85-900VAC	24V/2917mA	87	
PVA70-27B28		85-900VAC	28V/2500mA	87	
PVA70-27B35		85-900VAC	35V/2000mA	87	
PVA120-27B28	120W	85-900VAC	28V/4.3A	82	
PVA120-27B35		85-900VAC	35V/3.5A	82	
PVA120-27B30-C	120W	85-900VAC	30V/4A	82	
PVA120-27B35-C	122.5W	85-900VAC	35V/3.5A	82	

Package Dimension

PVA40-27Bxx series: LxWxH: 138.00x82.00x32.00(mm)

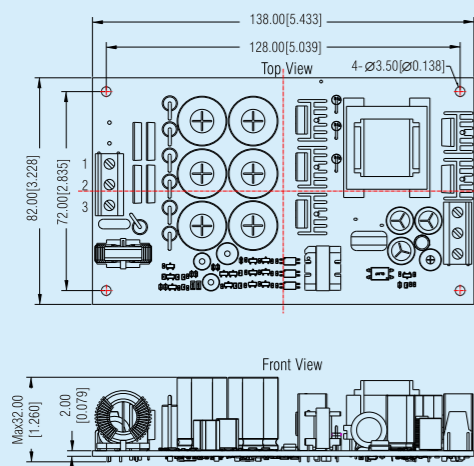


Pin-Out

Pin	Function
1	AC(L)
2	NC
3	AC(N)
4	Trim
5	-Vo
6	+Vo

Unit: mm[inch]
Wire range: 24-12AWG
Tightening torque: Max 0.4 N·m
General tolerance: ±1.00[±0.039]
The layout of the device is for reference only, please refer to the actual product

Package Dimension

PVA70-27Bxx series: LxWxH: 155.00x95.00x41.00(mm)

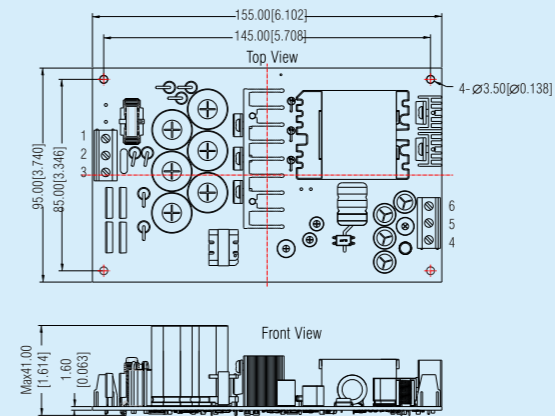


Pin-Out

Pin	Function
1	AC(L)
2	NC
3	AC(N)
4	Trim
5	-Vo
6	+Vo

Unit: mm[inch]
Wire range: 24-12AWG
Tightening torque: Max 0.4 N·m
General tolerance: ±1.00[±0.039]
The layout of the device is for reference only, please refer to the actual product

PVA120-27Bxx series: LxWxH: 170.00 x 107.00 x 52.00(mm)

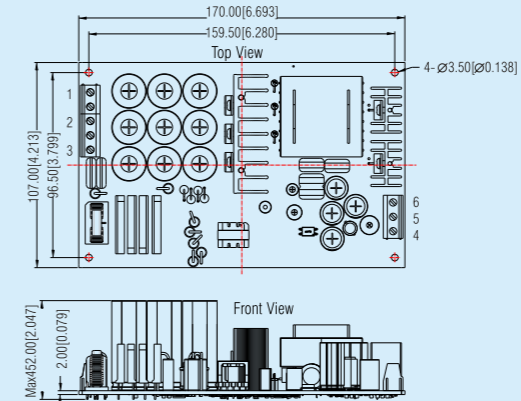


Pin-Out

Pin	Function
1	PE
2	AC(L)
3	AC(N)
4	Trim
5	-Vo
6	+Vo

Unit: mm[inch]
Wire range: 24-12AWG
Tightening torque: Max 0.4 N·m
General tolerance: ±1.00[±0.039]
The layout of the device is for reference only, please refer to the actual product

PVA120-27Bxx-C series: LxWxH: 187.00 x 113.00 x 59.00(mm)

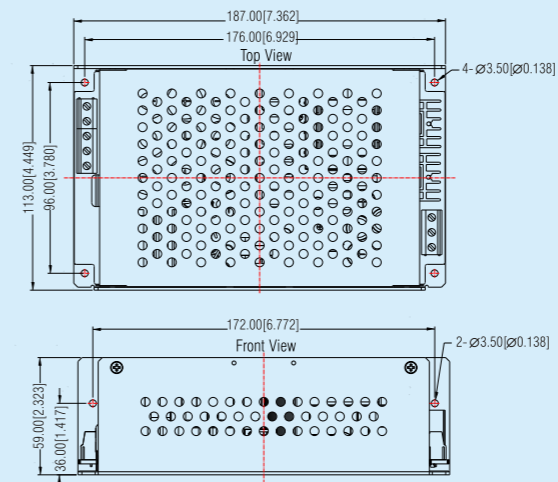

Pin-Out

Pin	Function
1	PE
2	AC(L)
3	AC(N)
4	Trim
5	-Vo
6	+Vo

Unit: mm[inch]
Wire range: 24-12AWG
Tightening torque: Max 0.4 N·m
General tolerance: ±1.00[±0.039]

These series are suitable for special industrial outdoor environment (harsh environment)

40-120W 460-1500VAC ultra-wide, ultra-high input voltage series specialized for mining industry

RoHS

Features

- Specialized for electrical equipment in mining industry
- Ultra-wide input voltage: 460 - 1500VAC
- Operating temperature: -25°C to +70°C
- Isolation: 4200VAC
- Ultra-low input impulse current
- High reliability, high efficiency, long life span
- Output short circuit, over-current, over-voltage protections




Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
PVA40-26B12	40W	460-1500VAC	12V/3400mA	82	RoHS
PVA40-26B28		460-1500VAC	28V/1430mA	85	
PVA40-26B35		460-1500VAC	35V/1150mA	85	

Package Dimension


PVA40-26Bxx series: LxWxH: 144.50 x 105.00 x 40.00(mm)

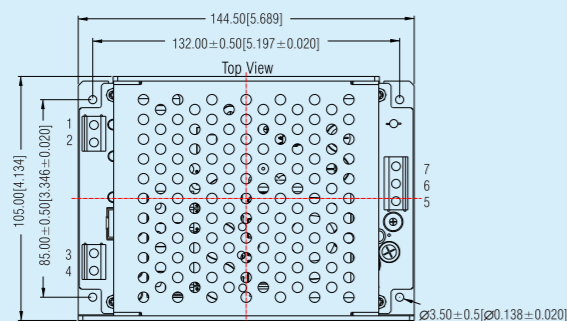

Pin-Out

Pin	Function
1	AC(L)
2	AC(L)
3	AC(N)
4	AC(N)
5	+Vo
6	-Vo
7	Trim

Unit: mm[inch]
Wire range: 24-12AWG
Tightening torque: Max 0.4 N·m
General tolerance: ±1.00[±0.039]

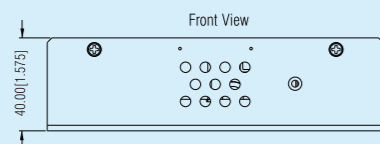

DC/DC Converter

1. 5-60W 100-1200VDC ultra-wide input voltage isolated & regulated output series.....	83
2. 40W 200-1200VDC ultra-wide input voltage isolated & regulated output series.....	84
3. 15-40W 200-1500VDC ultra-wide input voltage isolated series.....	84-85
4. 45-75W ultra-wide input voltage caged power supply specialized for SVG.....	85-86
5. 120-200W new energy 200-1100VDC ultra-wide input voltage converter.....	87
6. 200W 250-1500VDC new energy ultra wide & high input voltage converter.....	88
7. 1W fixed input voltage, isolated & unregulated output series (automotive).....	89
8. HK series specialized for intelligent instrument.....	90
9. 1W fixed input voltage, isolated & unregulated output series specialized for BMS.....	91
10. 1-2W fixed input voltage, isolated & unregulated output G/H_S series specialized for medical.....	92
11. 1-2W fixed input voltage, 1500VDC isolated & unregulated output series.....	93
12. 0.25-3W fixed input voltage, isolated & unregulated output series.....	94-100
13. 0.75-2W fixed input voltage, isolated & regulated output series.....	101-102
14. 0.5-3A non-isolated switching regulator.....	103-104
15. 6-16A wide input voltage, non-isolated switching regulator.....	105
16. 10A wide input non-isolated & regulated converter.....	105
17. 1W/3W ultra-compact size wide input isolated DC/DC converter.....	106
18. 1-50W wide input voltage, isolated & regulated output series.....	107-130
19. 20W ultra-wide input voltage, 1500VDC isolated & regulated output series.....	108
20. 600VDC/1000VDC/1250VDC/1500VDC/2000VDC high output voltage, non-isolated & regulated output series.....	108-109
21. 3W ultra-thin SMD/DIP package wide input isolated & regulated DC/DC converter.....	112
22. 3-6W wide input voltage, isolated & regulated output series for automotive.....	114-115
23. 3-10W open-frame wide input isolated & regulated DC/DC converter.....	117
24. 6/10/15W ultra-thin wide input voltage, isolated & regulated SMD/DIP DC/DC converter.....	120/123/126
25. DC/DC converter specialized for super-capacitor and lithium battery-powered.....	122
26. 75-200W 4:1 wide input voltage, 2250VDC isolated & regulated output series.....	131
27. 6-40W 4:1 wide input voltage, 2250VDC/3000VDC isolated & regulated output series for railway.....	132-133
28. 50-250W wide input voltage, 3000VDC isolated & regulated output series for railway.....	133-134
29. 3-30W ultra-wide input, dual isolated & regulated output series.....	135

5-60W 100-1200VDC ultra-wide input voltage isolated & regulated output series CE RoHS

Features

- Ultra-wide input voltage, suitable for PV & HVC applications
- 10:1 ultra-wide input voltage range: 100-1200VDC
- Operating temperature: -40°C to +70°C
- Isolation: 4000VAC
- Efficiency up to 85%
- High reliability, 3 years warranty
- Input reverse voltage, output over-voltage and short-circuit protections
- EN62109 approval




Model Number	Power	Input Voltage Range(VDC)	Output Voltage/Current(Vo1/Io1)	Output Voltage/Current(Vo2/Io2)	Output Voltage/Current(Vo3/Io3)	Effi(%) (typ)	Certification
PV05-27B05R2	5W	100-1000	5V/1000mA	/	/	72	CE RoHS
PV10-27B05R2	10W	100-1000	5V/2000mA	/	/	72	
PV10-27B09R2			9V/1110mA	/	/	76	
PV10-27B24R2	10W	100-1000	24V/420mA	/	/	80	RoHS
PV10-27C050524			200-1200	5V/1000mA	5V/400mA	24V/100mA	
PV15-27B12R2	15W	100-1000	12V/1250mA	/	/	77	CE RoHS
PV15-27B15R2			15V/1000mA	/	/	78	
PV15-27B24R2			24V/625mA	/	/	80	
PV60-27D1215-13	60W	200-1100	12V/3000mA	15V/1330mA	/	85	RoHS

Note: Detailed application please refer to datasheet.

Package Dimension


PV10-27C Series LxWxH: 70.00x48.00x23.50(mm)



Pin	Function
1	-Vin
2	No pin
3	+Vin
4	+Vo3
5	-Vo3
6	+Vo2
7	-Vo2
8	+Vo1
9	-Vo1

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

PV05/10/15-27BxxR2 Series LxWxH: 70.00x48.00x23.50(mm)




Pin	Function
1	NC
2	-Vin
3	+Vin
4	+Vo
5	-Vo

NC: No connection.
Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

Note: A2 chassis mounting and A4 DIN-Rail mounting are available and please refer to datasheet for details.

PV60-27D1215-13 Series LxWxH: 162.00x69.00x30.00(mm)

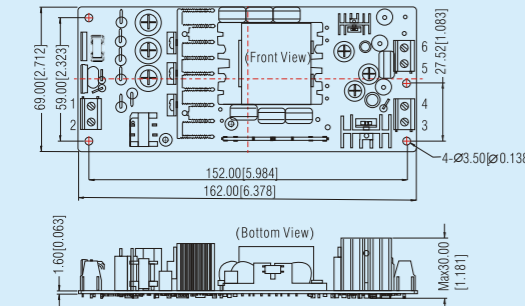

Pin	Function
1	+Vin
2	-Vin
3	-Vo1
4	+Vo1
5	-Vo2
6	+Vo2

Unit: mm[inch]
Wire diameter: 24-12AWG
Tightening torque: Max 0.4 N·m
General tolerance: ±1.00[±0.039]

• This catalog is used to introduce our latest products, for more information, please contact our sales department

40W 200-1200VDC ultra-wide input voltage isolated & regulated output series RoHS

Features


- Ultra-wide input voltage, suitable for PV & HVC applications
- 6:1 ultra-wide input voltage range: 200-1200VDC
- Operating temperature: -25°C to +70°C
- Isolation: 4000VDC
- Efficiency up to 84%
- High efficiency, low ripple & noise
- Optional packages: chassis mounting, Din-Rail mounting
- Input under-voltage, reverse voltage, output over-voltage and short-circuit protections



Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Certification
PV40-27B12	40W	200-1200VDC	12V/3330mA	83	RoHS
PV40-27B15			15V/2670mA	84	
PV40-27B24			24V/1670mA	84	

Note: Detailed application please refer to datasheet.

Package Dimension LxWxH: 89.00x63.50x25.00(mm)

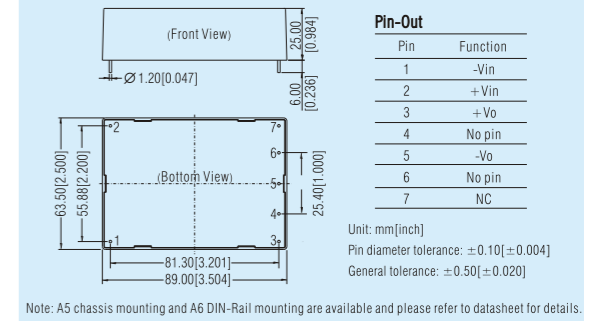

15-40W 200-1500VDC ultra-wide input voltage isolated series

UL US CE RoHS

Features

- Ultra-wide input voltage, suitable for PV & HVC applications
- 7.5:1 ultra-wide input voltage range: 200-1500VDC
- Isolation: 4000VAC
- Efficiency up to 80%
- High reliability, 3 years warranty
- Input under-voltage, reverse input voltage, output over-current and short-circuit protections
- UL 1741/CSA-C22.2 No. 107.1, EN62109 approval
- Compact size and cost-effective PV15-29BxxL series available




Model Number	Power	Input Voltage Range (VDC)	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Output Voltage/Current (Vo3/Io3)	Effi(%) (typ)	Certification
PV15-29B05	10W	200-1500	5V/2000mA	/	/	64	CE RoHS
PV15-29B12			12V/1250mA	/	/	71	
PV15-29B15			15V/1000mA	/	/	72	
PV15-29B24	15W	200-1500	24V/625mA	/	/	74	RoHS
PV15-29C050505			5V/1500mA	5V/800mA	5V/400mA	76	
PV15-29C050524			5V/1500mA	5V/600mA	24V/150mA	76	
PV40-29B12	40W	200-1500	12V/3330mA	/	/	78	CE RoHS
PV40-29B15			15V/2670mA	/	/	82	
PV40-29B24			24V/1670mA	/	/	83	
PV15-29B05L	10W	200-1500	5V/2000mA	/	/	70	RoHS
PV15-29B12L	15W	200-1500	12V/1250mA	/	/	76	
PV15-29B15L			15V/1000mA	/	/	77	
PV15-29B24L	24V/625mA	/	/	79			

Note: Series with suffix DIN-Rail A8 package offer built-in 1500VDC fuse and EMC circuit and with A10 are standard DIN-Rail package.


• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Package Dimension


PV15/40-29Bxx Series LxWxH: 125.00x75.00x40.00(mm)

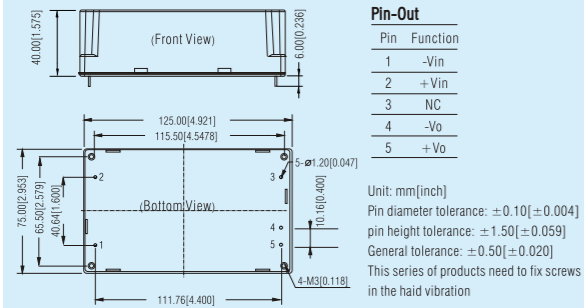

PV15-29BxxL Series LxWxH: 109.00x58.50x30.00(mm)

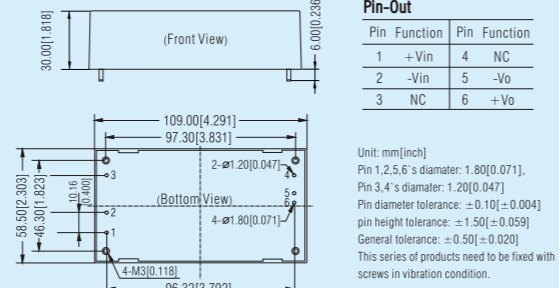

PV15-29Cxx Series LxWxH: 89.00x63.50x25.00(mm)

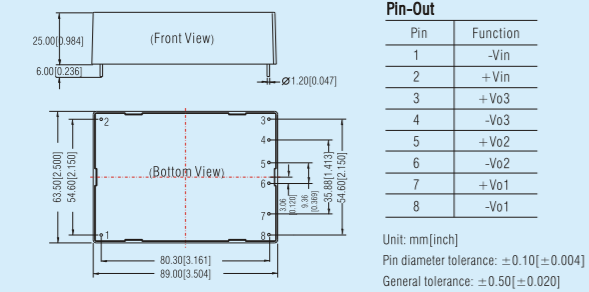

45-50W 150-1500VDC ultra-wide input voltage caged power supply specialized for SVG

RoHS

Features

- Specialized for SVG application with input under-voltage, reverse input voltage, output short-circuit and over-voltage protections
- 10:1 ultra-wide input voltage range: 150-1500VDC
- Operating temperature: -40°C to +85°C (PV45-29D)
-40°C to +65°C (PV50-29D)
- Isolation: 4000VAC
- High reliability, long longevity
- Input under-voltage, reverse input voltage, output over-current and short-circuit protections
- High 78% efficiency low ripple & noise
- Meet 5000m altitude requirements




Product Program

Model Number	Power	Input Voltage Range(Optional)	Output Voltage/Current(Vo/Io)	Output Voltage Range	Certification
PV45-29D1515-15	45W	150-1500VDC	15V/1.53A 15V/1.53A	12V/15V dual outputs(customization is acceptable)	RoHS
PV45-29D1505-10	45W	150-1500VDC	15V/2.66A, 5V/1A		
PV45-29D1508-06	45W	150-1500VDC	15V/2.66A, 8V/0.625A		
PV50-29D1505-20	50W	150-1500VDC	15V/2.66A, 5V/2A		

Note: 1500VDC input with 12V/15V dual outputs(customization is acceptable).


Package Dimension

PV45-29D Series LxWxH: 144.50x105.00x40.00(mm)

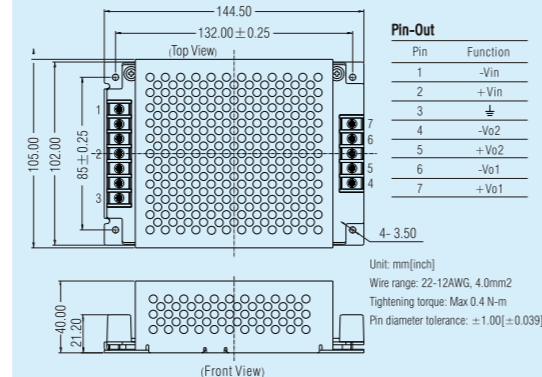

Package Dimension

PV50-29D Series LxWxH: 150.00 x 100.00 x 38.70(mm)

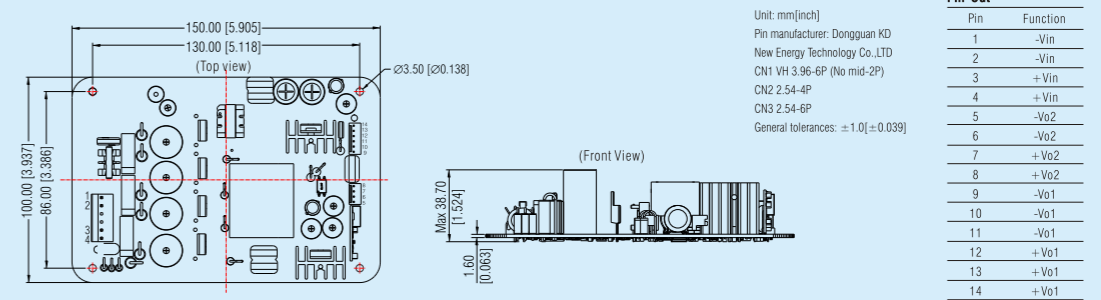

75W 250-3300VDC ultra-wide input voltage caged power supply specialized for SVG

RoHS

Features

- Ultra-wide input voltage range: 250 - 3300VDC
- High I/O isolation test voltage of 6000VAC (Input-output)
- High I/O isolation test voltage of 4000VAC (Vo1-Vo2)
- Operating temperature: -40°C to +85°C
- Input under-voltage, reverse input voltage, output over-current and short-circuit protections
- Vo1: output short-circuit, over-current, over-voltage protections
- Immunity, EFT/Surge: ±4KV perf. Criteria B
- Meet 5000m altitude requirements



Product Program


Model Number	Output Power		Nominal Output Voltage and Current			Efficiency (%) Typ.	Capacitive Load (μF) Max.		Certification
	Steady state	transient*	Vo1/Io1	Vo2/Io2**		Efficiency (%) Typ.	Vo1	Vo2	
			Constant voltage mode	transient* (Constant current mode)	Steady state (Constant voltage mode)				
PV75-36D15400-01	32W	75W	15V/2000mA	20-400V/ 112.5mA	400V/5mA	70	2000	560	RoHS

Note: *The working time of constant current mode is ≤ 2s (Typ.), the interval is 1.5s (Typ.).

**At room temperature, 560μF capacitor can be charged to 400V in 2 seconds; The output current of the Vo2 constant current mode is 112.5mA (Typ.), the output voltage of constant voltage mode is 400V (Typ.).

Package Dimension

PV45-29D Series LxWxH: 220.00x157.00x40.00(mm)

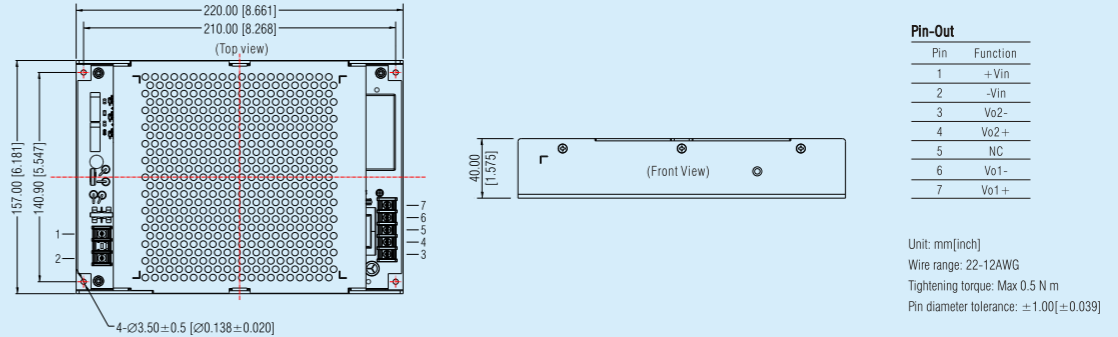

120-200W new energy 200-1100VDC ultra-wide input voltage converter



Features

- Ultra-wide input voltage range: 200 - 1100VDC(PV200:200-1000VDC)
- Isolation: 4000VAC
- Industrial operating temperature: -40°C to +70°C
- High efficiency, low ripple & noise
- Input reverse voltage, output short-circuit, over-current and over-voltage protections
- High reliability, long longevity
- EN62109 approval




Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Max.Capacitive Load (μF)	Certification
PV120-27B12	90W	200-1100 VDC	12V/7.5A	84	3000	RoHS
PV120-27B15	100W		15V/6.67A	85	2500	
PV120-27B24	120W		24V/5A	87	2000	
PV120-27B48	120W		48V/2.5A	89	680	
PV200-27B12	120W	200-1000 VDC	12V/10A	86	6000	CE RoHS
PV200-27B15	150W		15V/10A	87	4000	
PV200-27B24	200W		24V/8.4A	87	2000	
PV200-27B26	200W		26V/7.7A	87	2000	
PV200-27B48	200W		48V/4.2A	87	1000	

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension


PV120-27B Series LxWxH: 144.50x105.00x40.00(mm)

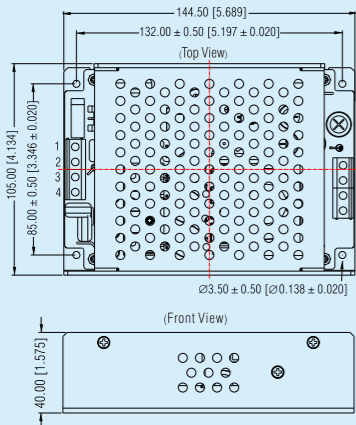

Pin	Function
1	+Vin
2	NC
3	-Vin
4	PE
5,6	-Vo
7,8	+Vo

Unit: mm[inch]
Wire range: 24-12AWG
Tightening torque: Max 0.4 N·m
Pin diameter tolerance: ±1.00[±0.039]

PV200-27B Series LxWxH: 168.00x110.00x45.00(mm)

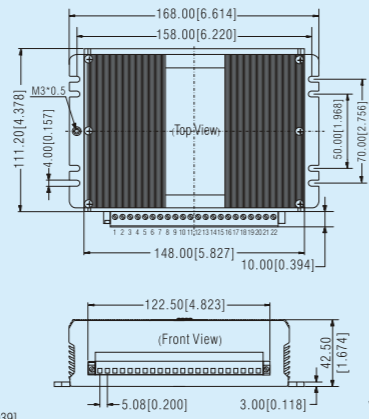

Pin	Function	Pin	Function
1	VIN+	12	NC
2	NC	13	NC
3	NC	14	NC
4	VIN-	15	NC
5	NC	16	Trim
6	NC	17	Vo-
7	PE	18	Vo-
8	NC	19	Vo-
9	NC	20	Vo+
10	NC	21	Vo+
11	NC	22	Vo+

Unit: mm[inch]
Pin diameter tolerance: ±1.00[±0.039]
Wire range: 28-12AWG

• This catalog is used to introduce our latest products, for more information, please contact our sales department

200W 250-1500VDC new energy ultra wide & high input voltage converter



Features


- Ultra-wide input voltage range: 250 - 1500VDC
- Isolation: 4000VAC
- Industrial operating temperature: -40°C to +70°C
- High efficiency, low ripple & noise
- Input reverse voltage, output short-circuit, over-current and over-voltage protections
- High reliability, long longevity
- UL 1741/CSA-C22.2 No.107.1, EN62109 approval
- Meet 5000m altitude requirements



Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Max.Capacitive Load (μF)	Certification
PV150-29B12	120W	250-1500 VDC	12V/10000mA	84	3500	RoHS
PV150-29B15	150W		15V/8000mA	85	3000	
PV150-29B24	150W		24V/6250mA	87	2000	
PV150-29B48	150W		48V/3125mA	88	1000	
PV200-29B24	200W	300-1500 VDC	24V/8.4A	86	5000	CE RoHS
PV200-29B48			48V/4.2A	87	2000	

Package Dimension LxWxH: 168.00x110.00x45.00(mm)


PV150-29Bxx Series LxWxH: 168.00x111.20x42.50(mm)

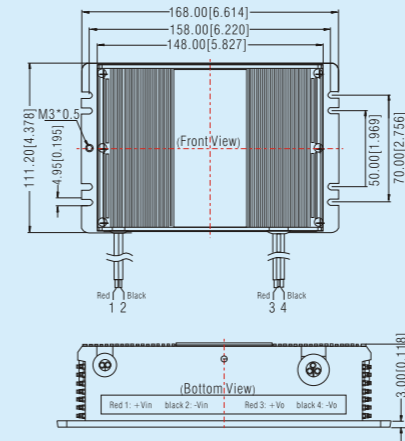

Pin	Function
1	+Vin
2	-Vin
3	+Vo
4	-Vo
5	PE

Unit: mm[inch]
Pin diameter tolerance: ±1.00[±0.039]

PV200-29Bxx Series LxWxH: 215.00x125.00x50.00(mm)

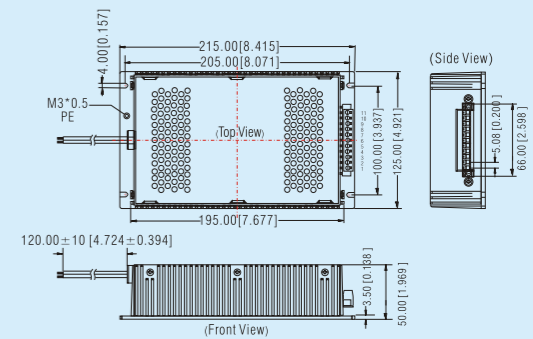

Pin	Function	Pin	Function
red line	Vin+	6	Vo+
black line	Vin-	7	Vo+
1	Vo-	8	Vo+
2	Vo-	9	Vo+
3	Vo-	10	Trim
4	Vo-	11	Trim
5	NC		

Unit: mm[inch]
Wire diameter: 24-12AWG
Tightening torque: Max 0.4 N·m
Pin diameter tolerance: ±1.00[±0.039]

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

1W fixed input voltage, isolated & unregulated output series (automotive)

CE RoHS

Features

- Specialized for automotive application, the whole machine meet AEC-Q100 standard
- Operating temperature: -40°C to +105°C
- Compact SMD package
- Manufacturing process meets IATF16949 standard
- Output short-circuit protection (self-recovery)
- International standard pin-out
- EN62368 approval




Product Program

Model Number	Power	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Isolation	Effi(%) (typ)	Certification
CF0505XT-1WR3	1W	4.5-5.5 (5VDC)	5	200	3500VDC	82	CE RoHS
CFB0505XT-1WR3			5	200			

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension

CF0505XT-1WR3 Series LxWxH: 13.20x11.40x7.25(mm)

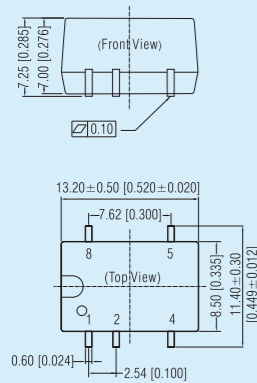


Pin-Out

Pin	Function
1	GND
2	Vin
4	OV
5	+Vo
8	NC

NC: No connection.

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

CFB0505XT-1WR3 Series LxWxH: 15.24x11.40x7.25(mm)



Pin-Out

Pin	Function
1	GND
2	Vin
4	OV
5	NC
7	+Vo
10	NC

NC: No connection.


Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

HK series specialized for intelligent instrument

RoHS

Features

- Suitable for two-wire loop power application
- Operating temperature: -40°C to +85°C
- High output current up to 5mA
- Ultra-miniature SIP package (HK_S Series)
- Excellent high and low temperature characteristics
- Isolation 1500VDC

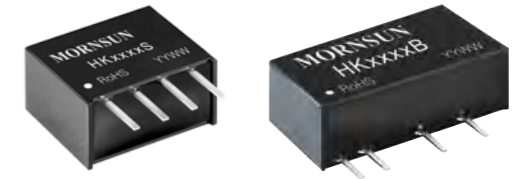


Product Program

Model Number	Input Voltage (VDC)	Input Current (mA)	Output Voltage (VDC)	Output Current (mA)	Isolation voltage (package)	Max.Capacitive Load (μF)
HK0503S	5	3.5-20	3.3	2.5	1500VDC (SIP)	10
HK5S03B		4-20	3.3	3.2	1000VDC (SIP)	10
HK8S03B	7.5	4-20	3.3	3.5	1000VDC (SIP)	10
HK8SX3B		4-20	3	5	1000VDC (SIP)	10
HK0803S	7-8	3.5-20	3.3	3.5	1500VDC (SIP)	10
HK0805S	7-8	3.5-20	5	2	1500VDC (SIP)	10

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension LxWxH: 19.65x6.00x10.16(mm) HKxxxxB




Pin-Out


Pin	Function
1	Vin
2	GND
4	OV
6	+Vo

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

Application:

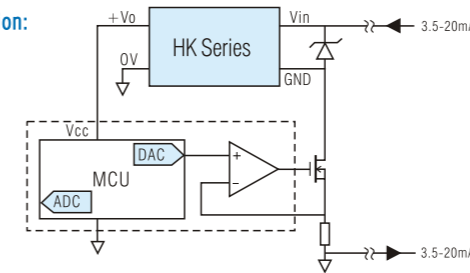

Package Dimension LxWxH: 11.60x6.00x10.16(mm) HKxxxxS

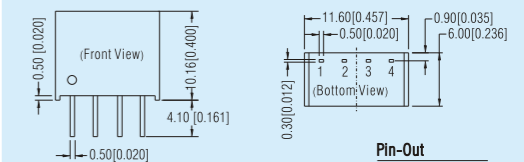

Pin-Out

Pin	Function
1	GND
2	Vin
3	OV
4	+Vo

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

1W fixed input voltage, isolated & unregulated output series specialized for BMS

RoHS


Features

- Suitable for BMS application
- Isolation: 1500VDC
- High power density
- No external component required
- International standard pin-out
- Meet requirements of EMI CISPR25 CLASS 3 Standard




Product Program					
Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi.(%) (typ)	Package
B0560LD-1WR2	4.5-5.5 (5VDC)	60	17	77	DIP
B0550LD-1WR2		50	20	79	DIP
B0505LD-1WR3		5	200	82	DIP

Application:

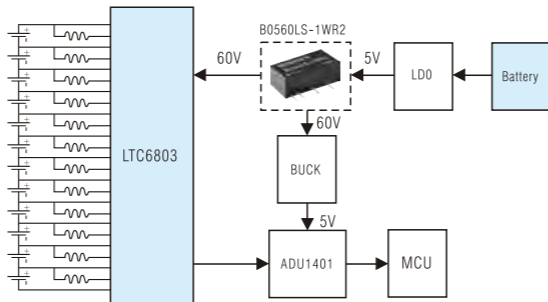

Package Dimension


B_LD-1WR3 LxWxH: 20.00x10.00x7.00(mm)



Pin	Function
1	GND
7	NC
8	OV
9	+Vo
14	Vin

NC: No connection.
Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

B_LD-1WR2 LxWxH: 20.32x10.16x8.20(mm)



Pin	Function
1	GND
7	NC
8	OV
9	+Vo
14	Vin

NC: No connection.
Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

1-2W fixed input voltage, isolated & unregulated output G/H_S series specialized for medical

RoHS CE CB

Features

- IEC60950, EN60601-1, ANSI/AAMI ES60601-1 approval (3rd edition, 1xMOPP/2xMOPP)
- Operating temperature: -40°C to +85°C
- Isolation: 4200VAC/6000VDC
- Efficiency up to 84%
- International standard pin-out
- The patient leakage current: Max 2μA




Product Program								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
H0305S-1WR2	1W	4.5-5.5 (5VDC)	5V/200mA	4200VAC (SIP)	RoHS			
G0505S-1WR2			±5V/±100mA		CE			
G0509S-1WR2			±9V/±56mA		RoHS			
G0512S-1WR2			±12V/±42mA		CE CB			
G0515S-1WR2			±15V/±34mA		RoHS			
H0503S-1WR2			3.3V/303mA		CE CB			
H0505S-1WR2			5V/200mA		RoHS			
H0512S-1WR2			12V/84mA		CE CB			
H0515S-1WR2			15V/67mA		RoHS			
G1205S-1WR2			1W		10.8-13.2 (12VDC)	±5V/±100mA	4200VAC (SIP)	CE
G1209S-1WR2	±9V/±56mA	RoHS						
G1212S-1WR2	±12V/±42mA	CE						
G1215S-1WR2	±15V/±34mA	RoHS						
H1205S-1WR2	5V/200mA	CE						
H1212S-1WR2	12V/84mA	RoHS						
H1215S-1WR2	15V/67mA	CE						
G1515S-1WR2	1W	13.5-16.5(15VDC)		±15V/±34mA		4200VAC (SIP)		RoHS
G2405S-1WR2				±5V/±100mA				CE
G2409S-1WR2				±9V/±56mA				RoHS
G2412S-1WR2			±12V/±42mA	CE				
G2415S-1WR2			±15V/±34mA	RoHS				
H2405S-1WR2			5V/200mA	CE				
H2412S-1WR2			12V/84mA	RoHS				
H2415S-1WR2			15V/67mA	CE				
G0505S-2WR2			2W	4.5-5.5 (5VDC)	±5V/±200mA		4200VAC (SIP)	CE
G0509S-2WR2					±9V/±111mA			RoHS
G0512S-2WR2	±12V/±83mA	CE						
G0515S-2WR2	±15V/±67mA	RoHS						
H0505S-2WR2	5V/400mA	CE						
H0512S-2WR2	12V/167mA	RoHS						
H0515S-2WR2	15V/133mA	CE						
G1205S-2WR2	2W	10.8-13.2 (12VDC)			±5V/±200mA	4200VAC (SIP)		CE
G1209S-2WR2					±9V/±111mA			RoHS
G1212S-2WR2					±12V/±83mA			CE
G1215S-2WR2			±15V/±67mA	RoHS				
H1205S-2WR2			5V/400mA	CE				
H1212S-2WR2			12V/167mA	RoHS				
H1215S-2WR2			15V/133mA	CE				
G1505S-2WR2			2W	13.5-16.5 (15VDC)	±5V/±200mA		4200VAC (SIP)	RoHS
G1515S-2WR2					±15V/±67mA			CE
H1505S-2WR2					5V/400mA			RoHS
G2405S-2WR2	±5V/±200mA	CE						
G2409S-2WR2	±9V/±111mA	RoHS						
G2412S-2WR2	±12V/±83mA	CE						
G2415S-2WR2	±15V/±67mA	RoHS						
H2405S-2WR2	5V/400mA	CE						
H2412S-2WR2	12V/167mA	RoHS						
H2415S-2WR2	15V/133mA	CE						

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension


H_S-1WR2, H_S-2WR2 Series LxWxH: 19.50x9.80x12.50(mm)

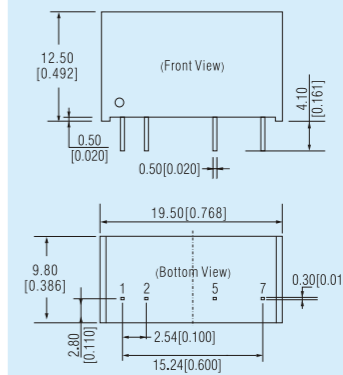

Pin	Single
1	Vin
2	GND
5	OV
7	+Vo

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

G_S-1WR2, G_S-2WR2 Series LxWxH: 19.50x9.80x12.50(mm)

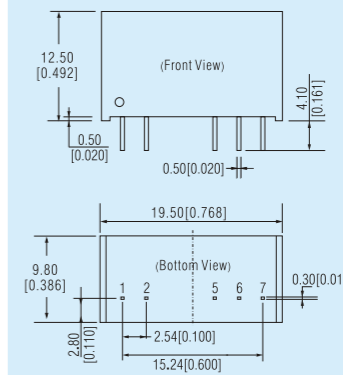

Pin	Dual
1	Vin
2	GND
5	-Vo
6	OV
7	+Vo


Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

1-2W fixed input voltage, 1500VDC isolated & unregulated output series

Features

- Pin-out compatible with DCP01 series
- Operating temperature: -40°C to +105°C
- Compact size, ultra-thin package
- International standard pin-out
- Continuous short-circuit protection

RoHS

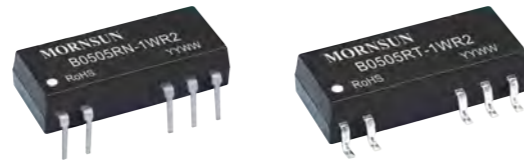


Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Package
B0505RN-1WR2	1W	4.5-5.5 (5VDC)	5V/200mA	1500VDC	DIP
B0505RT-1WR2					SMD

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension

B_RN-1WR2 LxWxH: 19.50x9.50x4.68(mm)




Pin-Out

Pin	Function
1	Vin
2	GND
5	0V
6	+Vo
Others	NC

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

B_RT-1WR2 LxWxH: 19.50x10.53x5.00(mm)



Pin-Out

Pin	Function
1	Vin
2	GND
5	0V
6	+Vo
Others	NC

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

• This catalog is used to introduce our latest products, for more information, please contact our sales department

0.25-1W fixed input voltage, 1500VDC isolated & unregulated output series

Features

- Isolation: 1500VDC
- Operating temperature: -40°C to +105°C
- Efficiency up to 83%
- No-load input current as low as 5mA
- Miniature SIP package
- Continuous short-circuit protection
- International standard pin-out
- IEC/EN/UL60950 approval, UL/EN62368 approval

RoHS CE CB



Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
B0303S-W2R2	0.25W	4.5-5.5 (5VDC)	3.3V/76mA	1500VDC (SIP)	RoHS				
B0305S-W2R2			5V/50mA						
B0503S-W2R2			3.3V/76mA						
B0505S-W2R2			5V/50mA						
B0512S-W2R2			12V/21mA						
B1205S-W2R2			5V/50mA						
B1505S-W2R2			5V/50mA						
B2405S-W2R2			5V/50mA						
B0303S-1WR2*			1W			2.97-3.63 (3.3VDC)	3.3V/303mA	1500VDC (SIP)	RoHS
B0305S-1WR2*							5V/200mA		
B0303S-1WR2*	3.3V/303mA								
B0305S-1WR2*	5V/200mA								
A0503S-1WR3	$\pm 3.3V/\pm 152mA$	1500VDC (SIP)		RoHS					
A0505S-1WR3	$\pm 5V/\pm 100mA$								
A0509S-1WR3	$\pm 9V/\pm 56mA$								
A0512S-1WR3	$\pm 12V/\pm 42mA$								
A0515S-1WR3	$\pm 15V/\pm 34mA$								
A0524S-1WR3	$\pm 24V/\pm 21mA$								
B0503LS-1WR3	3.3V/303mA								
B0505LS-1WR3	5V/200mA								
B0509LS-1WR3	9V/111mA								
B0512LS-1WR3	12V/84mA								
B0515LS-1WR3	15V/67mA								
B0524LS-1WR3	24V/42mA								
B0503S-1WR3	1W	4.5-5.5 (5VDC)	3.3V/303mA	1500VDC (SIP)	RoHS				
B0505S-1WR3			5V/200mA						
B0509S-1WR3			9V/111mA						
B0512S-1WR3			12V/84mA						
B0515S-1WR3			15V/67mA						
B0524S-1WR3			24V/42mA						
A1205S-1WR2			$\pm 5V/\pm 100mA$			1500VDC (SIP)	RoHS		
A1212S-1WR2			$\pm 12V/\pm 42mA$						
A1215S-1WR2			$\pm 15V/\pm 34mA$						
B1205LS-1WR2			5V/200mA						
B1212LS-1WR2	12V/84mA								
B1215LS-1WR2	15V/67mA								
B1224LS-1WR2	24V/42mA								
B1205S-1WR2	5V/200mA								
B1212S-1WR2	12V/84mA								
B1215S-1WR2	15V/67mA								
B1224S-1WR2	24V/42mA								
A1505S-1WR2	1W	13.5-16.5 (15VDC)	$\pm 5V/\pm 100mA$	1500VDC (SIP)	RoHS				
A1512S-1WR2			$\pm 12V/\pm 42mA$						
A1515S-1WR2			$\pm 15V/\pm 34mA$						
B1505LS-1WR2			5V/200mA						
B1512LS-1WR2			12V/84mA						
B1515LS-1WR2			15V/67mA						
B1505S-1WR2			5V/200mA						
B1512S-1WR2			12V/84mA						
B1515S-1WR2			15V/67mA						
A2405S-1WR2*			1W			21.6-26.4 (24VDC)	$\pm 5V/\pm 100mA$	1500VDC (SIP)	RoHS
A2412S-1WR2*	$\pm 12V/\pm 42mA$								
A2415S-1WR2*	$\pm 15V/\pm 34mA$								
B2405LS-1WR2*	5V/200mA								
B2412LS-1WR2*	12V/84mA								
B2415LS-1WR2*	15V/67mA								
B2424LS-1WR2*	24V/42mA								

Note: 1. Short circuit protection time of products marked with * is 1s;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.


Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
B2405S-1WR2*	1W	21.6-26.4 (24VDC)	5V/200mA	1500VDC (SIP)	RoHS
B2412S-1WR2*			12V/84mA		
B2415S-1WR2*			15V/67mA		
B2424S-1WR2*			24V/42mA		

Package Dimension

B_S-1WR2, B_S-W2R2, B_S-1WR3 Series (SIP-4)

LxWxH: 11.60x6.00x10.16(mm)




Pin-Out

Pin	Function
1	GND
2	Vin
3	0V
4	+Vo

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

A_S-1WR2, B_LS-1WR2 Series (SIP-7) LxWxH: 19.50x6.00x9.30(mm)




Pin-Out

Pin	A_S-1WR2	B_LS-1WR2
1	Vin	Vin
2	GND	GND
4	-Vo	0V
5	0V	No Pin
6	+Vo	+Vo

Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

A_S-1WR3, B_LS-1WR3 Series (SIP-7) LxWxH: 19.65x6.00x10.16(mm)

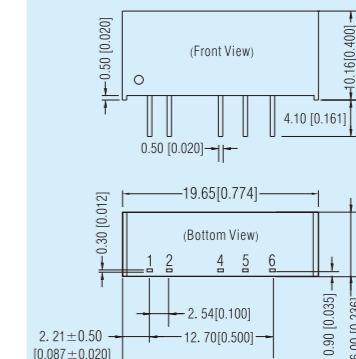

Pin-Out

Pin	Single	Dual
1	Vin	Vin
2	GND	GND
4	0V	-Vo
5	No Pin	0V
6	+Vo	+Vo


Unit: mm[inch]
Pin section tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

1W fixed input voltage, isolated & unregulated output series

Features

- Isolation: 3000VDC
- Operating temperature: -40°C to +105°C
- Efficiency up to 85%
- No-load input current as low as 5mA
- Miniature SIP package, automation packaged
- Continuous short-circuit protection
- International standard pin-out
- UL/EN60950 approval, UL/EN62368 approval

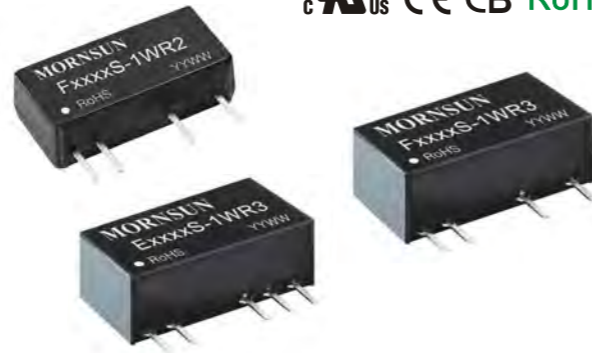


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification		
F0303S-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	3000VDC (SIP)	RoHS		
F0305S-1WR2*			5V/200mA				
E0503S-1WR3	1W	4.5-5.5 (5VDC)	±3.3V/±152mA	3000VDC (SIP)	CE RoHS		
E0505S-1WR3			±5V/±100mA				
E0509S-1WR3			±9V/±56mA				
E0512S-1WR3			±12V/±42mA				
E0515S-1WR3			±15V/±33mA				
E0524S-1WR3			±24V/±21mA				
F0503S-1WR3			3.3V/303mA				
F0505S-1WR3			5V/200mA				
F0509S-1WR3			9V/111mA				
F0512S-1WR3			12V/83mA				
F0515S-1WR3	15V/67mA	3000VDC (SIP)	CE RoHS				
F0524S-1WR3	24V/42mA						
E1205S-1WR2	1W	10.8-13.2 (12VDC)	±5V/±100mA	3000VDC (SIP)	CE RoHS		
E1212S-1WR2			±12V/±42mA				
E1215S-1WR2			±15V/±33mA				
F1205S-1WR2			5V/200mA				
F1212S-1WR2			12V/83mA				
F1215S-1WR2			15V/67mA				
F1224S-1WR2			24V/42mA				
E1505S-1WR2			±5V/±100mA			3000VDC (SIP)	CE RoHS
E1515S-1WR2			±15V/±33mA				
F1505S-1WR2			5V/200mA				
F1512S-1WR2	12V/83mA						
F1515S-1WR2	15V/67mA						
E2405S-1WR2*	1W	21.6-26.4 (24VDC)	±5V/±100mA	3000VDC (SIP)	CE RoHS		
E2412S-1WR2*			±12V/±42mA				
E2415S-1WR2*			±15V/±33mA				
F2405S-1WR2*			5V/200mA				
F2412S-1WR2*			12V/83mA				
F2415S-1WR2*			15V/67mA				
F2424S-1WR2*			24V/42mA				


Note: 1. Short circuit protection time of products marked with * is 1s;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension

E_S-1WR2、F_S-1WR2 Series (SIP) LxWxH: 19.50x6.00x9.30 (mm)

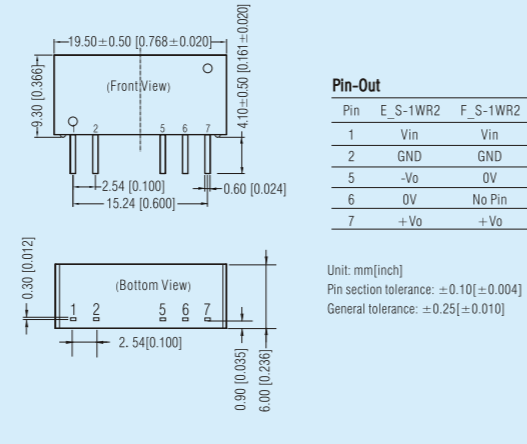

E_S-1WR3、F_S-1WR3 Series (SIP) LxWxH: 19.65x6.00x10.16 (mm)

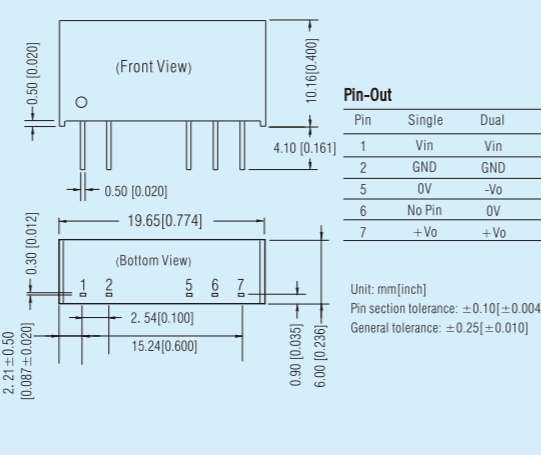

0.25-1W fixed input voltage, isolated & unregulated output series

Features

- Operating temperature: -40°C to +105°C
- Efficiency up to 85%
- High power density
- Miniature compact SMD package
- Continuous short-circuit protection




Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
B0303XT-W2R2*	0.25W	2.97-3.63 (3.3VDC)	3.3V/76mA	1500VDC (SMD)	RoHS			
B0305XT-W2R2*			5V/50mA					
B0503XT-W2R2			3.3V/76mA					
B0505XT-W2R2			5V/50mA					
B0515XT-W2R2			15V/17mA					
B1205XT-W2R2			5V/50mA					
B1212XT-W2R2			12V/21mA					
B2405XT-W2R2			5V/50mA					
F0505XT-W2R3			4.5-5.5(5VDC)			5V/40mA	3000VDC (SMD)	CE RoHS
F1205XT-W2R2			10.8-13.2(12VDC)			5V/50mA		
B0303XT-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	1500VDC (SMD)	CE RoHS			
B0305XT-1WR2*			5V/200mA					
B0506XT-1WR2			6V/167mA					
A0505XT-1WR3	1W	4.5-5.5 (5VDC)	±5V/±100mA	1500VDC (SMD)	CE RoHS			
A0509XT-1WR3			±9V/±56mA					
A0512XT-1WR3			±12V/±42mA					
A0515XT-1WR3			±15V/±34mA					
A0524XT-1WR3			±24V/±21mA					
B0503XT-1WR3			3.3V/303mA					
B0505XT-1WR3			5V/200mA					
B0509XT-1WR3			9V/111mA					
B0512XT-1WR3			12V/84mA					
B0515XT-1WR3			15V/67mA					
B0524XT-1WR3	24V/42mA							
A1205XT-1WR2	1W	10.8-13.2 (12VDC)	±5V/±100mA	1500VDC (SMD)	CE RoHS			
A1212XT-1WR2			±12V/±42mA					
A1215XT-1WR2			±15V/±33mA					
B1205XT-1WR2			5V/200mA					
B1212XT-1WR2			12V/84mA					
B1215XT-1WR2			15V/67mA					
B1224XT-1WR2			24V/42mA					
A1515XT-1WR2			±15V/±33mA			1500VDC (SMD)	CE RoHS	
B1505XT-1WR2			5V/200mA					
B1515XT-1WR2			15V/67mA					
A2405XT-1WR2*	1W	21.6-26.4 (24VDC)	±5V/±100mA	1500VDC (SMD)	CE RoHS			
A2412XT-1WR2*			±12V/±42mA					
A2415XT-1WR2*			±15V/±33mA					
B2405XT-1WR2*			5V/200mA					
B2412XT-1WR2*			12V/84mA					
B2415XT-1WR2*			15V/67mA					
B2424XT-1WR2*			24V/42mA					
F0303XT-1WR2*			1W			2.97-3.63 (3.3VDC)	3.3V/303mA	3000VDC (SMD)
F0305XT-1WR2*	5V/200mA							
E0505XT-1WR3	1W	4.5-5.5 (5VDC)	±5V/±100mA	3000VDC (SMD)	CE RoHS			
E0509XT-1WR3			±9V/±56mA					
E0512XT-1WR3			±12V/±42mA					
E0515XT-1WR3			±15V/±34mA					
E0524XT-1WR3			±24V/±21mA					
F0503XT-1WR3			3.3V/303mA					
F0505XT-1WR3			5V/200mA					
F0509XT-1WR3			9V/111mA					
F0512XT-1WR3			12V/84mA					
F0515XT-1WR3			15V/67mA					
F0524XT-1WR3	24V/42mA							
E1205XT-1WR2	1W	10.8-13.2 (12VDC)	±5V/±100mA	3000VDC (SMD)	CE RoHS			
E1212XT-1WR2			±12V/±42mA					
E1215XT-1WR2			±15V/±33mA					
E1224XT-1WR2			±24V/±21mA					
F1205XT-1WR2			5V/200mA					
F1212XT-1WR2			12V/84mA					
F1215XT-1WR2			15V/67mA					
F1224XT-1WR2			24V/42mA					

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
E1515XT-1WR2	1W	13.5-16.5 (15VDC)	±15V/±33mA	3000VDC (SMD)	CE RoHS
F1515XT-1WR2			15V/67mA		
E2405XT-1WR2*	1W	21.6-26.4 (24VDC)	±5V/±100mA	3000VDC (SMD)	CE RoHS
E2412XT-1WR2*			±12V/±42mA		
E2415XT-1WR2*			±15V/±33mA		
E2424XT-1WR2*			±24V/±21mA		
F2405XT-1WR2*			5V/200mA		
F2415XT-1WR2*			15V/67mA		
F2424XT-1WR2*			24V/42mA		
FB0505XT-1WR3			1W		

Note: 1. Short circuit protection time of products marked with * is 1s;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.


Package Dimension

A_XT-1WR2、E_XT-1WR2 Series LxWxH: 15.24x11.20x7.25 (mm)

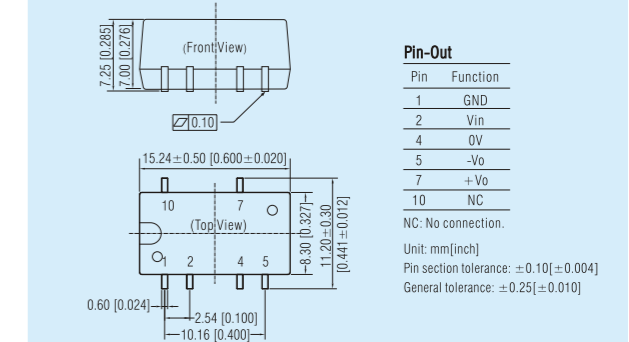

A_XT-1WR3/E_XT-1WR3、FB_XT-1WR3、E_XT-1WR2 Series

LxWxH: 15.24x11.40x7.25 (mm)

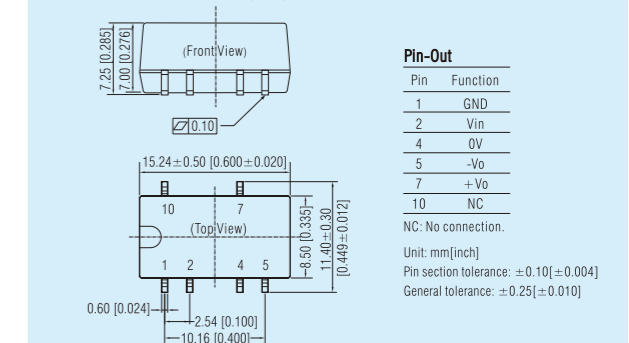


• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Package Dimension

B/F_XT-W2R2, B/F_XT-1WR2 Series LxWxH: 12.70x11.20x7.25(mm)

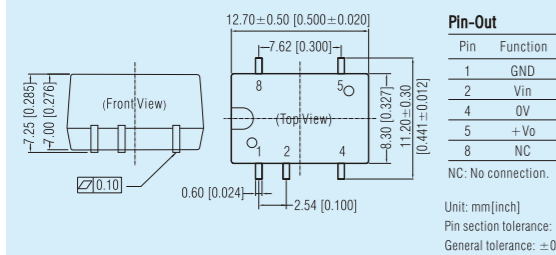


Pin-Out

Pin	Function
1	GND
2	Vin
4	OV
5	+Vo
8	NC

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

F_XT-W2R3, B/F_XT-1WR3 Series LxWxH: 13.20x11.40x7.25(mm)

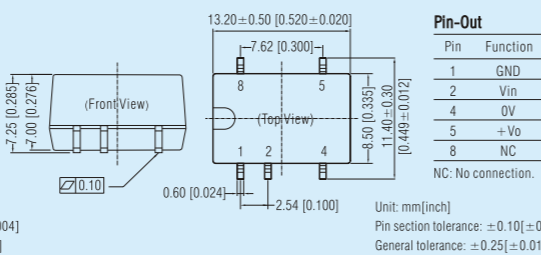

Pin-Out

Pin	Function
1	GND
2	Vin
4	OV
5	+Vo
8	NC

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

1W fixed input voltage, isolated & unregulated output series

Features

- Operating temperature: -40°C to +105°C
- Isolation: 3000VDC
- Efficiency up to 83%
- No-load input current as low as 5mA
- Miniature DIP package
- Continuous short-circuit protection
- International standard pin-out
- IEC/EN/UL60950 approval, UL/EN62368 approval(pending)



us CE CB RoHS

Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
B0303D-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	1500VDC (DIP)	RoHS				
B0305D-1WR2*			5V/200mA						
A1205D-1WR2			±5V/±100mA						
A1212D-1WR2	1W	10.8-13.2 (12VDC)	±12V/±42mA	1500VDC (DIP)	RoHS				
B1205D-1WR2			5V/200mA						
B1212D-1WR2			12V/84mA						
B1215D-1WR2	1W	13.5-16.5 (15VDC)	15V/67mA	1500VDC (DIP)	RoHS				
B1505D-1WR2			5V/200mA						
B1515D-1WR2			15V/67mA						
A2412D-1WR2*	1W	21.6-26.4 (24VDC)	±12V/±42mA	1500VDC (DIP)	RoHS				
A2415D-1WR2*			±15V/±34mA						
B2405D-1WR2*			5V/200mA						
B2412D-1WR2*			12V/84mA						
B2415D-1WR2*			15V/67mA						
B2424D-1WR2*			24V/42mA						
E0505D-1WR3	1W	4.5-5.5 (5VDC)	±5V/±100mA	3000VDC (DIP)	CE				
E0509D-1WR3			±9V/±56mA						
E0512D-1WR3			±12V/±42mA						
E0515D-1WR3			±15V/±34mA						
F0303D-1WR2*			1W			2.97-3.63(3.3VDC)	3.3V/303mA	3000VDC (DIP)	RoHS
F0503D-1WR2							3.3V/303mA		
F0505D-1WR2	5V/200mA								
F0512D-1WR2	1W	4.5-5.5 (5VDC)	12V/83mA	3000VDC (DIP)	CE				
F0515D-1WR2			15V/67mA						
F1205D-1WR2			±5V/±100mA						
F1205D-1WR2	1W	10.8-13.2 (12VDC)	5V/200mA	3000VDC (DIP)	RoHS				
F1212D-1WR2			12V/83mA						
F1215D-1WR2			15V/67mA						
F1515D-1WR2	1W	13.5-16.5(15VDC)	15V/67mA	3000VDC (DIP)	RoHS				
E2412D-1WR2*			±12V/±42mA						
E2415D-1WR2*			±15V/±34mA						
F2405D-1WR2*	1W	21.6-26.4 (24VDC)	5V/200mA	3000VDC (DIP)	RoHS				
F0503N-1WR3			3.3V/303mA						
F0505N-1WR3			5V/200mA						
F0509N-1WR3			9V/111mA						
F0512N-1WR3			12V/84mA						
F0515N-1WR3			15V/67mA						
F0524N-1WR3	1W	4.5-5.5 (5VDC)	24V/42mA	3000VDC (DIP)	RoHS				
F0524N-1WR3			24V/42mA						

Note: 1. Short circuit protection time of products marked with * is 1s;

2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension

B_D-1WR2 Series (DIP) LxWxH: 12.70x10.16x8.20(mm)

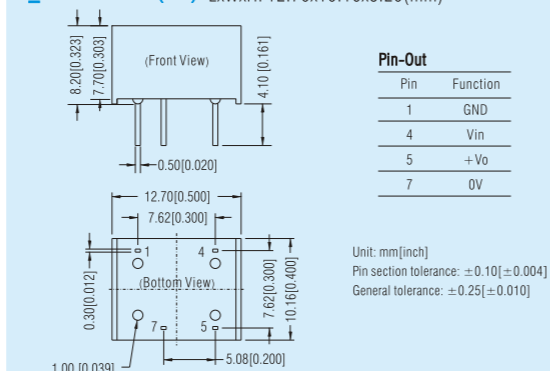


Pin-Out

Pin	Function
1	GND
4	Vin
5	+Vo
7	OV

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

A_D-1WR2 Series (DIP) LxWxH: 20.00x10.00x7.00(mm)

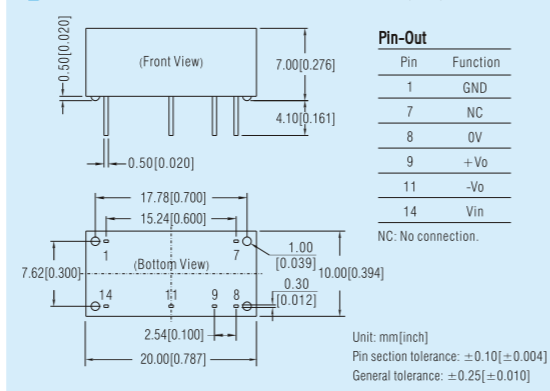


Pin-Out

Pin	Function
1	GND
7	NC
8	OV
9	+Vo
11	-Vo
14	Vin

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

Package Dimension

F05_N-1WR3 Series (DIP) LxWxH: 12.70x10.16x8.20(mm)

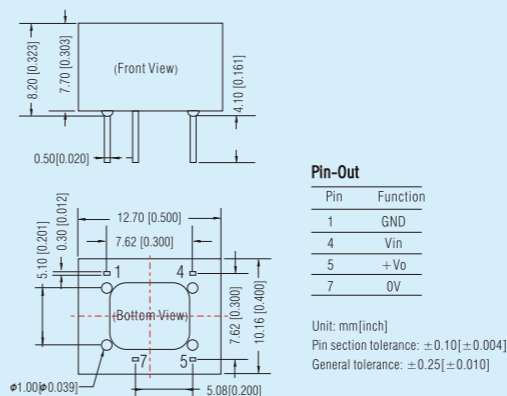


Pin-Out

Pin	Function
1	GND
4	Vin
5	+Vo
7	OV

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

E/F_D-1WR2, E_D-1WR3 Series (DIP) LxWxH: 20.00x10.00x7.00(mm)

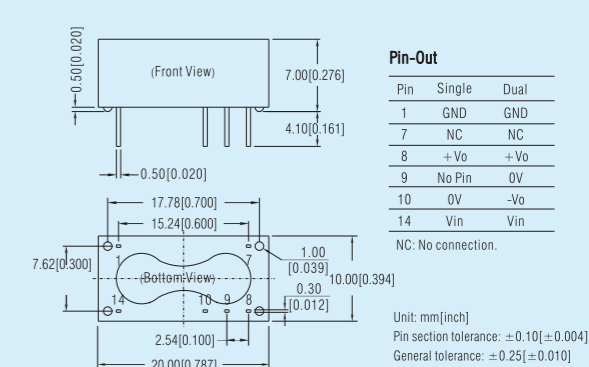

Pin-Out

Pin	Single	Dual
1	GND	GND
7	NC	NC
8	+Vo	+Vo
9	No Pin	OV
10	OV	-Vo
14	Vin	Vin


NC: No connection.

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

2-3W fixed input voltage, isolated & unregulated output series

Features

- Operating temperature: -40°C to +105°C
- Efficiency up to 88%
- High power density
- Miniature SIP package
- Anti-static protection: ±8KV
- Continuous short-circuit protection

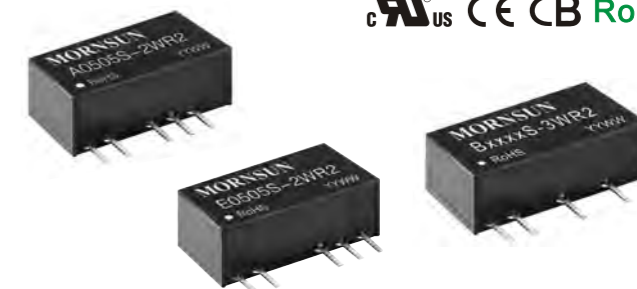

us CE CB RoHS

Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
A0505S-2WR2	2W	4.5-5.5 (5VDC)	±5V/±200mA	1500VDC (SIP)	RoHS
A0512S-2WR2			±12V/±83mA		
A0515S-2WR2			±15V/±67mA		
B0503S-2WR2			3.3V/400mA		
B0505S-2WR2			5V/400mA		
B0512S-2WR2			12V/167mA		
B0515S-2WR2	15V/133mA				
B0524S-2WR2*	2W	10.8-13.2 (12VDC)	24V/83mA	1500VDC (SIP)	RoHS
A1205S-2WR2			±5V/±200mA		
A1212S-2WR2			±12V/±83mA		
A1215S-2WR2			±15V/±67mA		
B1205S-2WR2			5V/400mA		
B1212S-2WR2			12V/167mA		
B1215S-2WR2	15V/133mA				
B1224S-2WR2	2W	13.5-16.5 (15VDC)	24V/83mA	1500VDC (SIP)	RoHS
A1505S-2WR2			±5V/±200mA		
A1515S-2WR2			±15V/±67mA		
B1505S-2WR2			5V/400mA		
B1515S-2WR2			15V/133mA		
A2405S-2WR2*			±5V/±200mA		
A2412S-2WR2*	±12V/±83mA				
A2415S-2WR2*	±15V/±67mA				
B2405S-2WR2*	2W	21.6-26.4 (24VDC)	5V/400mA	1500VDC (SIP)	RoHS
B2412S-2WR2*			12V/167mA		
B2415S-2WR2*			15V/133mA		
B2424S-2WR2*			24V/83mA		

Note: 1. Short circuit protection time of products marked with * is 1s;

2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
E0505S-2WR2	2W	4.5-5.5 (5VDC)	±5V/±200mA	3000VDC (SIP)	RoHS
E0512S-2WR2			±12V/±83mA		
E0515S-2WR2			±15V/±67mA		
F0503S-2WR2			3.3V/400mA		
F0505S-2WR2			5V/400mA		
F0512S-2WR2			12V/167mA		
F0515S-2WR2	15V/133mA				
F0524S-2WR2*	2W	10.8-13.2 (12VDC)	24V/83mA	3000VDC (SIP)	RoHS
E1205S-2WR2			±5V/±200mA		
E1212S-2WR2			±12V/±83mA		
E1215S-2WR2			±15V/±67mA		
F1205S-2WR2			5V/400mA		
F1212S-2WR2			12V/167mA		
F1215S-2WR2	15V/133mA				
F1224S-2WR2	2W	13.5-16.5 (15VDC)	24V/83mA	3000VDC (SIP)	RoHS
E1515S-2WR2			±15V/±67mA		
F1505S-2WR2			5V/400mA		
F1512S-2WR2			12V/167mA		
E2405S-2WR2*			±5V/±200mA		
E2412S-2WR2*			±12V/±83mA		
E2415S-2WR2*	±15V/±67mA				
F2405S-2WR2*	2W	21.6-26.4 (24VDC)	5V/400mA	3000VDC (SIP)	RoHS
F2412S-2WR2*			12V/167mA		
F2415S-2WR2*			15V/133mA		
F2424S-2WR2*			24V/83mA		
B0505S-3WR2*			5V/600mA		
B1212S-3WR2*			12V/250mA		
F0505S-3WR2	3W	4.5-5.5(5VDC)	5V/600mA	1500VDC (SIP)	RoHS
F1205S-3WR2			10.8-13.2 (12VDC)		
F1212S-3WR2			12V/250mA		

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Package Dimension


A_S-2WR2, B_S-2WR2 Series (SIP) LxWxH: 19.65x7.05x10.16(mm)



Pin-Out table for A_S-2WR2 and B_S-2WR2 series.

Unit: mm[inch] Pin section tolerance: ±0.10[±0.004] General tolerance: ±0.25[±0.010]



B_S-3WR2 Series (SIP) LxWxH: 19.65x7.05x10.16(mm)



Pin-Out table for B_S-3WR2 series.

Unit: mm[inch] Pin section tolerance: ±0.10[±0.004] General tolerance: ±0.25[±0.010]

E_S-2WR2, F_S-2WR2, F_S-3WR2 Series (SIP) LxWxH: 19.65x7.05x10.16(mm)



Pin-Out table for E_S-2WR2, F_S-2WR2, F_S-3WR2 series.

Unit: mm[inch] Pin section tolerance: ±0.10mm[±0.004] General tolerance: ±0.25mm[±0.010]

2W fixed input voltage, isolated & unregulated output series

Features

- Operating temperature: -40°C to +105°C
Efficiency up to 84%
High power density
Miniature SMD package
Anti-static protection: ±8kV




Product Program

Product Program table listing Model Number, Power, Input Voltage, Output Voltage/Current, Isolation, and Certification for various converter models.

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension

B/F_XT-2WR2 Series LxWxH: 12.70x11.20x7.25(mm)

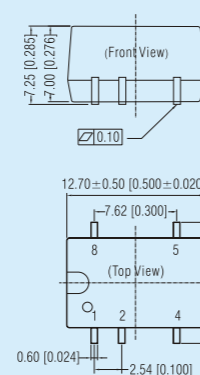

Pin-Out table for B/F_XT-2WR2 series.

NC: No connection.

Unit: mm[inch] Pin section tolerance: ±0.10[±0.004] General tolerance: ±0.25[±0.010]

This catalog is used to introduce our latest products, for more information, please contact our sales department

2W fixed input voltage, isolated & unregulated output series

Features

- Operating temperature: -40°C to +85°C
Efficiency up to 85%
Miniature DIP package
Anti-static protection: ±8kV
Continuous short-circuit protection




Product Program

Product Program table listing Model Number, Power, Input Voltage, Output Voltage/Current, Isolation, and Certification for various converter models.

Note: 1. Short circuit protection time of products marked with * is 1s; 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension


A/B_D-2WR2 Series (DIP-14) LxWxH: 20.32x10.16x8.20(mm)

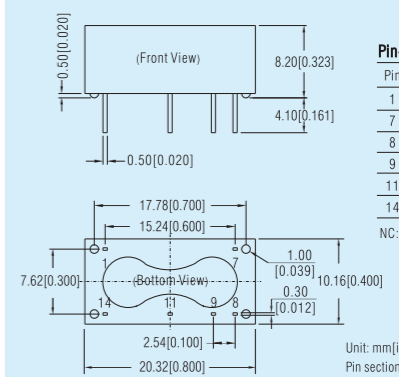

Pin-Out table for A/B_D-2WR2 series.

Unit: mm[inch] Pin section tolerance: ±0.10[±0.004] General tolerance: ±0.25[±0.010]

E/F_D-2WR2 Series (DIP-14) LxWxH: 20.32x10.16x8.20(mm)

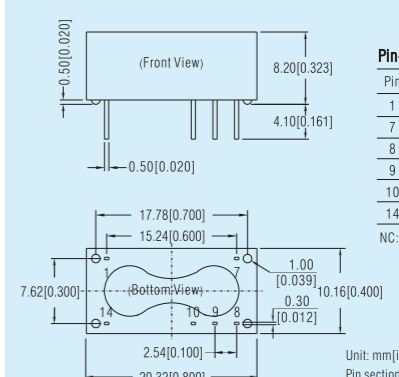

Pin-Out table for E/F_D-2WR2 series.

Unit: mm[inch] Pin section tolerance: ±0.10[±0.004] General tolerance: ±0.25[±0.010]

This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

0.75-2W fixed input voltage, isolated & regulated output series

Features

- Isolation: 3000VDC
- Operating temperature: -40°C to +85°C
- Efficiency up to 74%
- No-load input current as low as 5mA
- Miniature SIP package
- Continuous short-circuit protection
- International standard pin-out
- EN60950 approval, UL/EN62368 approval



MORNSUN CE CB RoHS

Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/ Current (Vo/Io)	Isolation (Package)	Certification				
IB0503S-W75R3	0.75W	4.75-5.25 (5VDC)	3.3V/200mA	1500VDC (SIP)	CE RoHS				
IB0505S-W75R3			5V/150mA						
IB0509S-W75R3			9V/83mA						
IB0512S-W75R3			12V/62mA						
IB0515S-W75R3			15V/50mA						
IB0503LS-1WR3	1W	4.75-5.25 (5VDC)	3.3V/250mA	1500VDC (SIP)	RoHS				
IB0505LS-1WR3			5V/200mA						
IB0509LS-1WR3			9V/111mA						
IB0512LS-1WR3			12V/84mA						
IB0515LS-1WR3			15V/67mA						
IB0524LS-1WR3			24V/41mA						
IB1205LS-1W*			5V/200mA			1000VDC (SIP)	CE RoHS		
IB1212LS-1W			12V/83mA						
IB1215LS-1W			15V/67mA						
IB1224LS-1W*			24V/42mA						
IB1505LS-1W*	5V/200mA								
IB1515LS-1W	15V/67mA								
IB2405LS-1W*	5V/200mA								
IB2412LS-1W	12V/83mA								
IB2415LS-1W	15V/67mA								
IB0503XT-W75R3	0.75W	4.75-5.25 (5VDC)	3.3V/200mA	1500VDC (SMD)	CE RoHS				
IB0505XT-W75R3			5V/150mA						
IB0509XT-W75R3			9V/83mA						
IB0512XT-W75R3			12V/62mA						
IB0515XT-W75R3			15V/50mA						
IB0503XT-1WR2	1W	4.75-5.25 (5VDC)	3.3V/243mA	1500VDC (SMD)	CE RoHS				
IB0505XT-1WR2			5V/200mA						
IB0512XT-1WR2			12V/84mA						
IB0515XT-1WR2			15V/67mA						
IB1205XT-1WR2			5V/200mA						
IB1212XT-1WR2			12V/84mA						
IB1215XT-1WR2			15V/67mA						
IB1505XT-1WR2			5V/200mA						
IB2405XT-1WR2			5V/200mA						
IB2412XT-1WR2			12V/84mA						
IB2415XT-1WR2	15V/67mA								
IF0503XT-1WR3	1W	4.75-5.25 (5VDC)	3.3V/250mA	3000VDC (SMD)	CE RoHS				
IF0505XT-1WR3			5V/200mA						
IF0509XT-1WR3			9V/111mA						
IF0512XT-1WR3			12V/84mA						
IF0515XT-1WR3			15V/67mA						
IF1205XT-1WR2	1W	11.4-12.6 (12VDC)	5V/200mA	3000VDC (SIP)	CE RoHS				
IF1212XT-1WR2			12V/83mA						
IF2405XT-1WR2			5V/200mA						
IF0503S-1WR3			1W			4.75-5.25 (5VDC)	3.3V/250mA	3000VDC (SIP)	RoHS
IF0505S-1WR3							5V/200mA		
IF0509S-1WR3	9V/111mA								
IF0512S-1WR3	12V/84mA								
IF0515S-1WR3	15V/67mA								
IF0524S-1WR3	24V/41mA								
IF1205S-1W*	5V/200mA	3000VDC (SIP)		CE RoHS					
IF1212S-1W	12V/83mA								
IF2405S-1W*	5V/200mA								
IF2415S-1W	15V/67mA								
IB0505S-2W	2W		4.75-5.25(5VDC)		5V/400mA	1000VDC (SIP)	CE RoHS		
IB1205S-2W		5V/400mA							
IB1212S-2W		12V/167mA							
IB1215S-2W		15V/133mA							
IB2405S-2W		5V/400mA							


Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/ Current (Vo/Io)	Isolation (Package)	Certification
IF0505S-2W	2W	4.75-5.25(5VDC)	5V/400mA	3000VDC (SIP)	CE RoHS
IF2405S-2W			22.8-25.2(24VDC)		
IE0505KS-1WR3	1W	4.75-5.25 (5VDC)	±5V/±100mA	3000VDC (SIP)	CE RoHS
IE0509KS-1WR3			±9V/±56mA		
IE0512KS-1WR3			±12V/±42mA		
IE0515KS-1WR3			±15V/±33mA		


Note: 1. Short circuit protection time of products marked with * is 1s;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

Package Dimension

IB_XT-1WR2, IF_XT-1WR2 Series LxWxH: 15.24x11.20x7.25(mm)

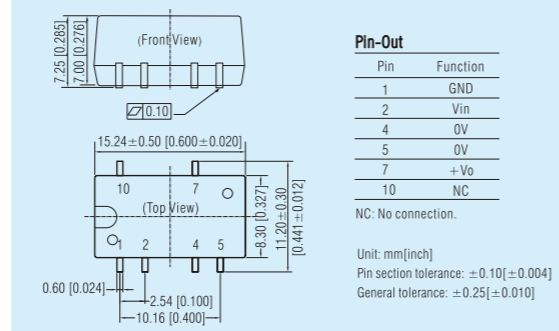


IF_S-1W, IB_LS-1W, IF_S-1WR3, IB_LS-1WR3, IB_S-2W, IF_S-2W Series

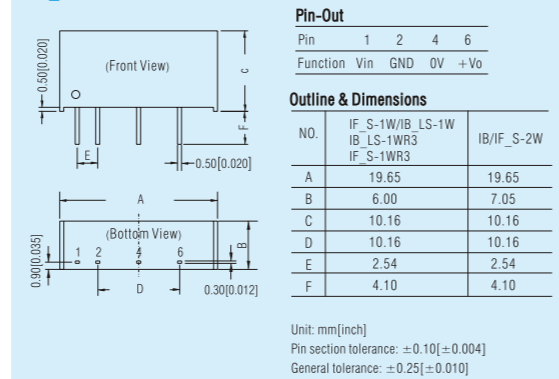


Package Dimension


IF_RT-1W Series LxWxH: 19.50x10.53x5.00(mm)

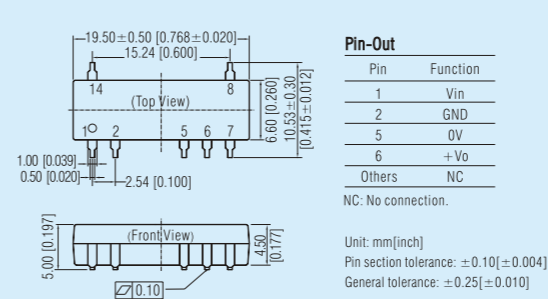


IB05_XT-W75R3 LxWxH: 13.20x11.40x7.25(mm)

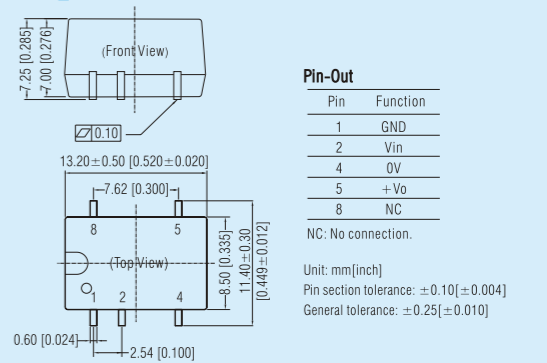


IB05_S-W75R3 Series LxWxH: 11.60x6.00x10.16(mm)

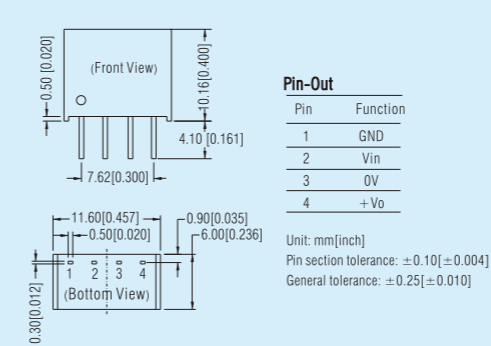

IF05-XT-1WR3 Series LxWxH: 15.24x11.20x7.25(mm)

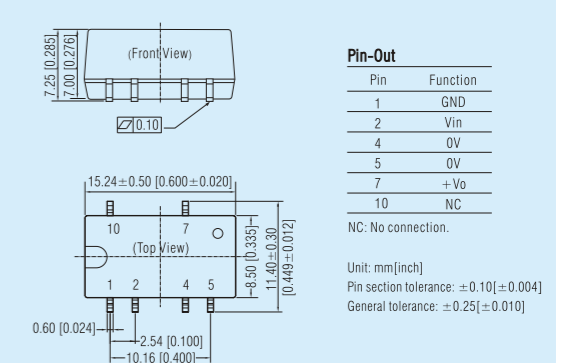

IE05_KS-1WR3 Series LxWxH: 27.50x9.50x12.00(mm)

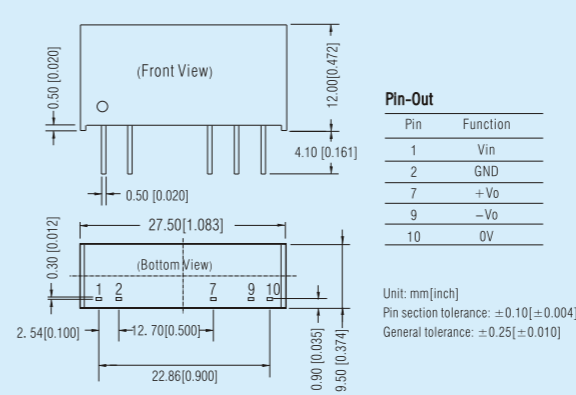

6-16A wide input voltage, non-isolated switching regulator **CE RoHS**

Features

- Efficiency up to 96%
- Operating temperature: -40°C to +85°C
- Input under-voltage, output over-current and short-circuit protections
- Fast dynamic response speed
- Miniature open frame SMD package

Product Program


Model Number	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (mA)	Certification
K12T-6A-P	8.3-14(12VDC)	0.75-5.0	6000	CE RoHS
K12T-6A-N	8.3-14(12VDC)	0.75-5.0	6000	
K12T-10A-P	8.3-14(12VDC)	0.75-5.0	10000	
K12T-10A-N	8.3-14(12VDC)	0.75-5.0	10000	
K12T-16A-P	8.3-14(12VDC)	0.75-5.0	16000	
K12T-16A-N	8.3-14(12VDC)	0.75-5.0	16000	

Note: Series with suffix "H" feature Ctrl pin is positive logic control with suffix "N" feature Ctrl pin is negative logic control.




Package Dimension

K12T-6A Series LxWxH: 20.30x11.40x6.60(mm)

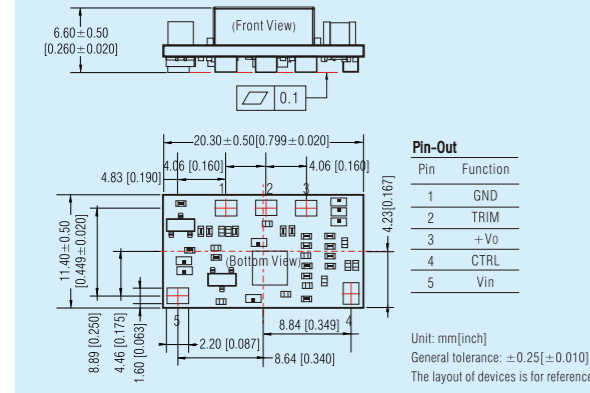

K12T-10A, 16A Series LxWxH: 33.02x13.50x8.32(mm)

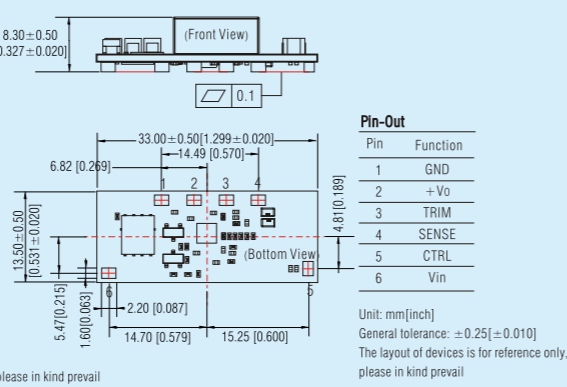

10A wide input non-isolated & regulated converter **RoHS**


Features

- Efficiency up to 97%
- Operating temperature: -40°C to +85°C
- Adjustable input start-up (under-voltage) voltage
- Input under-voltage, output over-current and short-circuit protections
- Open frame package
- 1/4 international standard brick package

Product Program

Model Number	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (A)	Certification
KUB4824QB-10A	30-75 (48VDC)	24	10	RoHS
KUB4812QB-10A	16-75 (48VDC)	12	10	

Package Dimension LxWxH: 59.2x37.60x13.00(mm)

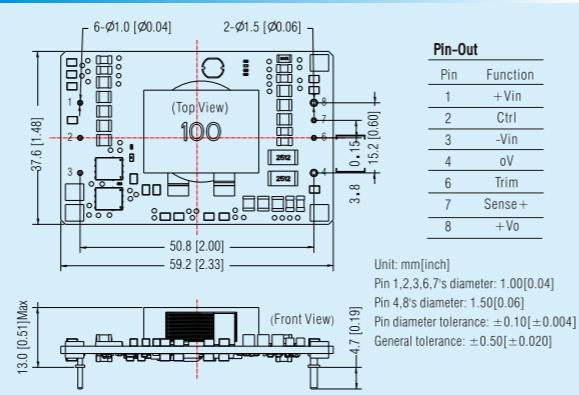

1W/3W ultra-compact size wide input isolated DC/DC converter **RoHS**

Features

- Suitable for communication, instrument, industrial control applications
- Ultra-compact DIP/SMD packages
- 2:1 Wide input voltage
- Operating temperature: -40°C to +85°C
- Isolation: 1500VDC
- Continuous short-circuit protection
- Meet EN62368, UL62368 certifications




Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRA1205ST/SD-1WR2	1W	9-18 (12VDC)	±5V/200mA	1500VDC (DIP/SMD)	RoHS
WRA1212ST/SD-1WR2			±12V/83mA		
WRA1215ST/SD-1WR2			±15V/67mA		
WRA1224ST/SD-1WR2		±24V/42mA			
WRA2405ST/SD-1WR2		18-36 (24VDC)	±5V/200mA		
WRA2412ST/SD-1WR2			±12V/83mA		
WRA2415ST/SD-1WR2	±15V/67mA				
WRA2424ST/SD-1WR2	1W	9-18 (12VDC)	±24V/42mA	1500VDC (DIP/SMD)	RoHS
WRB1203ST/SD-1WR2			3.3V/303mA		
WRB1205ST/SD-1WR2			5V/200mA		
WRB1212ST/SD-1WR2		12V/83mA			
WRB1215ST/SD-1WR2		15V/67mA			
WRB1224ST/SD-1WR2		24V/42mA			
WRB2403ST/SD-1WR2	18-36 (24VDC)	3.3V/303mA			
WRB2405ST/SD-1WR2		5V/200mA			
WRB2412ST/SD-1WR2		12V/83mA			
WRB2415ST/SD-1WR2	15V/67mA				
WRB2424ST/SD-1WR2	24V/42mA				
WRA1205ST/SD-3WR2	3W	9-18 (12VDC)	±5V/600mA	1500VDC (DIP/SMD)	RoHS
WRA1212ST/SD-3WR2			±12V/250mA		
WRA1215ST/SD-3WR2			±15V/200mA		
WRA1224ST/SD-3WR2		±24V/125mA			
WRA2405ST/SD-3WR2		18-36 (24VDC)	±5V/600mA		
WRA2412ST/SD-3WR2			±12V/250mA		
WRA2415ST/SD-3WR2	±15V/200mA				
WRA2424ST/SD-3WR2	±24V/125mA				
WRB1203ST/SD-3WR2	3W	9-18 (12VDC)	3.3V/758mA	1500VDC (DIP/SMD)	RoHS
WRB1205ST/SD-3WR2			5V/600mA		
WRB1212ST/SD-3WR2			12V/250mA		
WRB1215ST/SD-3WR2		15V/200mA			
WRB1224ST/SD-3WR2		24V/125mA			
WRB2403ST/SD-3WR2		18-36 (24VDC)	3.3V/758mA		
WRB2405ST/SD-3WR2	5V/600mA				
WRB2412ST/SD-3WR2	12V/250mA				
WRB2415ST/SD-3WR2	15V/200mA				
WRB2424ST/SD-3WR2	24V/125mA				

Package Dimension LxWxH: 59.2x37.60x13.00(mm)


WRA/B_ST-1WR2 WRA/B_ST-3WR2 Series

LxWxH: 15.00x14.00x9.10(mm)

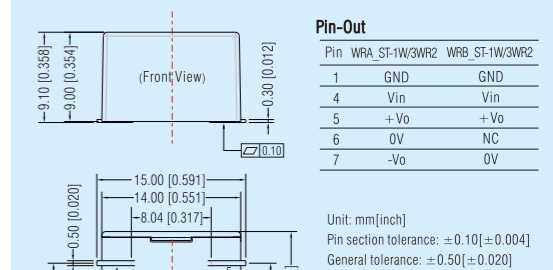

WRA/B_SD-1WR2 WRA/B_SD-3WR2 Series

LxWxH: 14.00x14.00x9.00(mm)

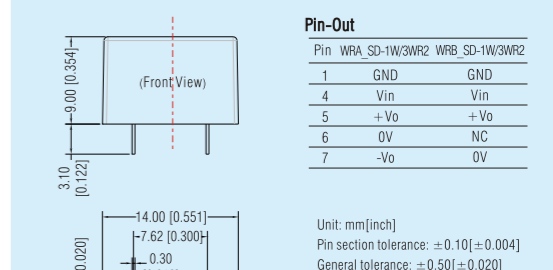

• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

1W 2:1 wide input voltage, isolated & regulated output series

Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Remote ON/OFF
- Output continuous short-circuit protection (self-recovery)
- EN60950 approval




Product Program 2:1 Input series									
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
WRA0505S-1WR2	1W	4.5-9 (5VDC)	±5V/±100mA	1500VDC (SIP)	RoHS				
WRA0512S-1WR2			±12V/±42mA						
WRA0515S-1WR2			±15V/±33mA						
WRB0503S-1WR2			3.3V/303mA						
WRB0505S-1WR2			5V/200mA						
WRB0512S-1WR2			12V/83mA						
WRB0515S-1WR2			15V/67mA						
WRB0524S-1WR2			24V/42mA						
WRA1205S-1WR2	1W	9-18 (12VDC)	±5V/±100mA	1500VDC (SIP)	RoHS				
WRA1212S-1WR2			±12V/±42mA						
WRA1215S-1WR2			±15V/±33mA						
WRB1203S-1WR2			3.3V/303mA						
WRB1205S-1WR2			5V/200mA						
WRB1209S-1WR2			9V/111mA						
WRB1212S-1WR2			12V/83mA						
WRB1215S-1WR2			15V/67mA						
WRB1224S-1WR2			24V/42mA						
WRA2405S-1WR2			1W			18-36 (24VDC)	±5V/±100mA	1500VDC (SIP)	RoHS
WRA2409S-1WR2							±9V/±56mA		
WRA2412S-1WR2	±12V/±42mA								
WRA2415S-1WR2	±15V/±33mA								
WRB2403S-1WR2	3.3V/303mA								
WRB2405S-1WR2	5V/200mA								
WRB2412S-1WR2	12V/83mA								
WRB2415S-1WR2	15V/67mA								
WRB2424S-1WR2	24V/42mA								
WRA4805S-1WR2	1W	36-75 (48VDC)		±5V/±100mA	1500VDC (SIP)		RoHS		
WRA4812S-1WR2				±12V/±42mA					
WRA4815S-1WR2			±15V/±33mA						
WRB4803S-1WR2			3.3V/303mA						
WRB4805S-1WR2			5V/200mA						
WRB4812S-1WR2			12V/83mA						
WRB4815S-1WR2			15V/67mA						

Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRE0505S-1WR2	1W	4.5-9 (5VDC)	±5V/±100mA	3000VDC (SIP)	RoHS
WRE0512S-1WR2			±12V/±42mA		
WRE0515S-1WR2			±15V/±33mA		
WRF0505S-1WR2			5V/200mA		
WRF0512S-1WR2			12V/83mA		
WRF0515S-1WR2			15V/67mA		
WRE1205S-1WR2	1W	9-18 (12VDC)	±5V/±100mA	3000VDC (SIP)	RoHS
WRE1212S-1WR2			±12V/±42mA		
WRE1215S-1WR2			±15V/±33mA		
WRF1203S-1WR2			3.3V/303mA		
WRF1205S-1WR2			5V/200mA		
WRF1209S-1WR2			9V/111mA		
WRF1212S-1WR2			12V/83mA		
WRF1215S-1WR2			15V/67mA		
WRE2405S-1WR2	1W	18-36 (24VDC)	±5V/±100mA	3000VDC (SIP)	RoHS
WRE2412S-1WR2			±12V/±42mA		
WRE2415S-1WR2			±15V/±33mA		
WRF2403S-1WR2			3.3V/303mA		
WRF2405S-1WR2			5V/200mA		
WRF2412S-1WR2			12V/83mA		
WRF2415S-1WR2			15V/67mA		
WRF2424S-1WR2			24V/42mA		
WRE4805S-1WR2	1W	36-75 (48VDC)	±5V/±100mA	3000VDC (SIP)	RoHS
WRE4812S-1WR2			±12V/±42mA		
WRE4815S-1WR2			±15V/±33mA		
WRF4803S-1WR2			3.3V/303mA		
WRF4805S-1WR2			5V/200mA		
WRF4812S-1WR2			12V/83mA		
WRF4815S-1WR2			15V/67mA		

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

Package Dimension

WRA/B_S-1WR2, WRE/F_S-1WR2 Series LxWxH: 22.00x9.50x12.00(mm)

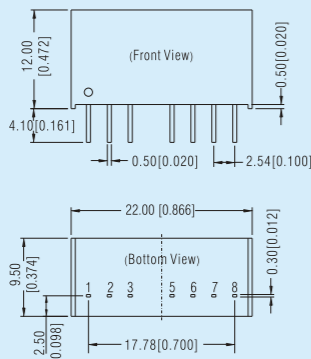

Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	Ctrl	Ctrl
5	NC	NC
6	+Vo	+Vo
7	OV	OV
8	CS	-Vo

NC: No connection.

Unit: mm[inch]
Pin section tolerance: ±0.10[±0.004]
General tolerance: ±0.25[±0.010]

20W ultra-wide input voltage, 1500VDC isolated & regulated output series


RoHS

Features

- Suitable for automotive application
- Operating temperature: -40°C to +85°C
- Efficiency up to 82%
- Input voltage as low as 6VDC
- Standby power consumption as low as 0.4W
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections



Package Dimension LxWxH: 50.80x40.60x11.8(mm)

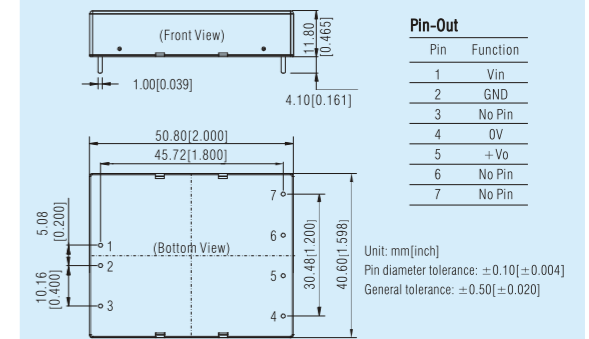

Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
UW2405D-20W	20W	6-50 (24VDC)	5V/4000mA	1500VDC	RoHS
UWD240512D-20W			5V/3500mA 12V/500mA		

Note: Special input, output and power customization is acceptable such as series less than 4.5VDC input.

600VDC/1000VDC/1250VDC/1500VDC/2000VDC high output voltage, non-isolated & regulated output series

RoHS

Features

- Ultra-wide input voltage range: 0-2000VDC
- Input under-voltage, output over-current and short-circuit protections
- Low ripple, low power consumption
- Constant current output




Product Program

Model Number	Input Voltage (VDC)	Output Voltage (VDC)		Output Current (mA)
		Nominal	Range	
HO1-P601-2C	10.8-13.2 (12VDC)	600	0-600	2
HO1-P102-20D	14-18 (16VDC)	1000	0-1000	20
HO1-P202-20D		2000	0-2000	20
HO1-P1251H-0.5C	10.8-13.2 (12VDC)	1250	0 to +1250	0.5
HO1-N1251H-0.5C		-1250	0 to -1250	0.5
HO1-P1251H-0.5D	13.5-16.5 (15VDC)	1250	0 to +1250	0.5
HO1-N1251H-0.5D		-1250	0 to -1250	0.5
HO1-P1251H-0.5F	21.6-26.4 (24VDC)	1250	0 to +1250	0.5
HO1-N1251H-0.5F		-1250	0 to -1250	0.5
HO1-P1251V-0.5C	10.8-13.2 (12VDC)	1250	0 to +1250	0.5
HO1-N1251V-0.5C		-1250	0 to -1250	0.5
HO1-P1251V-0.5F	21.6-26.4 (24VDC)	1250	0 to +1250	0.5
HO1-N1251V-0.5F		-1250	0 to -1250	0.5
HO1-P1501H-0.5C	10.8-13.2 (12VDC)	1500	0 to +1500	0.5
HO1-N1501H-0.5C		-1500	0 to -1500	0.5
HO1-P1501H-0.5D	13.5-16.5 (15VDC)	1500	0 to +1500	0.5
HO1-N1501H-0.5D		-1500	0 to -1500	0.5


Note: Other input voltage, output voltage and power customization is acceptable.

Package Dimension


H01-P102-20D & H01-P202-20D LxWxH: 80.00x55.00x28.00(mm)

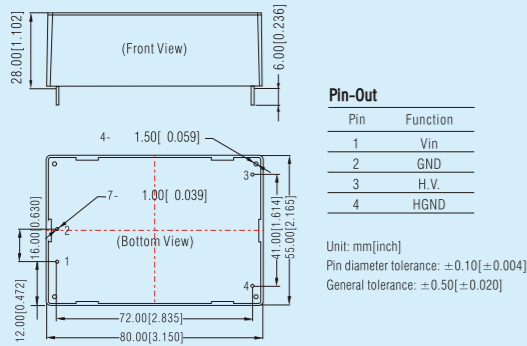


H01-P601-2C LxWxH: 46.00x25.70x15.50(mm)

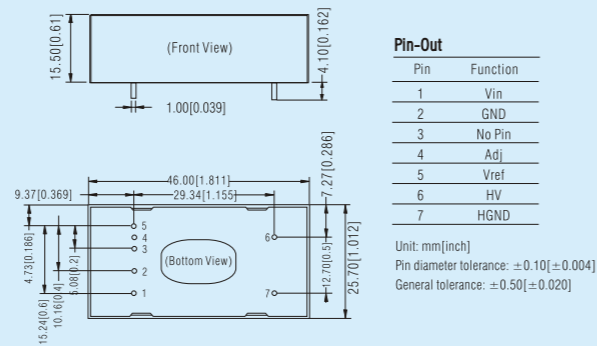


H01-P(N)H-0.5C-V1 LxWxH: 45.5x23.00x12.50(mm)

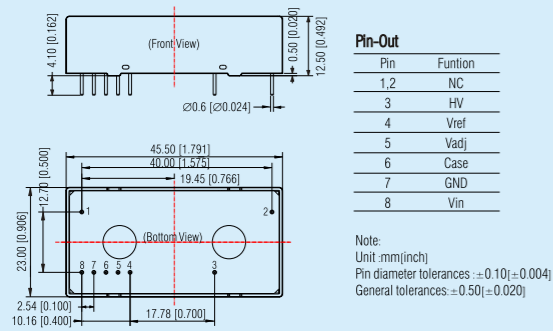

H01-P(N)H-0.5D-V0 LxWxH: 45.5x23.00x12.50(mm)

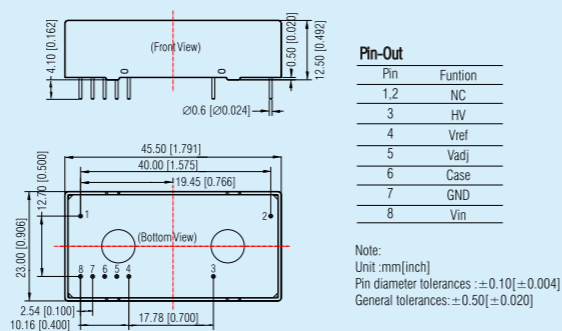

H01-P(N)V-0.5F-V0 LxWxH: 45.5x23.00x12.50(mm)

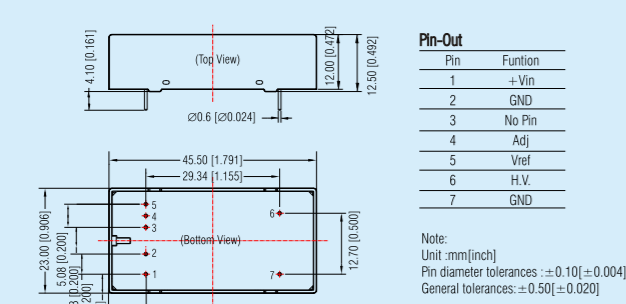

3W 2:1 wide input voltage, 1500VDC isolated & regulated output series



Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to $+85^{\circ}\text{C}$
- Low ripple & noise
- High power density
- Output continuous short-circuit protection (self-recovery)
- EN60950 approval



Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
WRA0505S-3WR2*	3W	4.5-9 (5VDC)	$\pm 5V/\pm 250\text{mA}$	1500VDC (SIP)	CE RoHS				
WRA0512S-3WR2*			$\pm 12V/\pm 104\text{mA}$						
WRA0515S-3WR2*			$\pm 15V/\pm 83\text{mA}$						
WRA0524S-3WR2*			$\pm 24V/\pm 52\text{mA}$						
WRB0503S-3WR2*			3.3V/758mA						
WRB0505S-3WR2*			5V/500mA						
WRB0509S-3WR2*			9V/278mA						
WRB0512S-3WR2*			12V/208mA						
WRB0515S-3WR2*			15V/167mA						
WRB0524S-3WR2*			24V/104mA						
WRA1205S-3WR2*	3W	9-18 (12VDC)	$\pm 5V/\pm 300\text{mA}$	1500VDC (SIP)	CE RoHS				
WRA1209S-3WR2*			$\pm 9V/\pm 167\text{mA}$						
WRA1212S-3WR2*			$\pm 12V/\pm 125\text{mA}$						
WRA1215S-3WR2*			$\pm 15V/\pm 100\text{mA}$						
WRB1203S-3WR2*			3.3V/758mA						
WRB1205S-3WR2*			5V/600mA						
WRB1206S-3WR2*			6V/500mA						
WRB1209S-3WR2*			9V/333mA						
WRB1212S-3WR2*			12V/250mA						
WRB1215S-3WR2*			15V/200mA						
WRB1224S-3WR2*	24V/125mA								
WRA2405S-3WR2*	3W	18-36 (24VDC)	$\pm 5V/\pm 300\text{mA}$	1500VDC (SIP)	CE RoHS				
WRA2409S-3WR2*			$\pm 9V/\pm 167\text{mA}$						
WRA2412S-3WR2*			$\pm 12V/\pm 125\text{mA}$						
WRA2415S-3WR2*			$\pm 15V/\pm 100\text{mA}$						
WRB2403S-3WR2*			3.3V/758mA						
WRB2405S-3WR2*			5V/600mA						
WRB2409S-3WR2*			9V/333mA						
WRB2412S-3WR2*			12V/250mA						
WRB2415S-3WR2*			15V/200mA						
WRB2424S-3WR2*			24V/125mA						
WRA4805S-3WR2*	3W	36-75 (48VDC)	$\pm 5V/\pm 300\text{mA}$	1500VDC (SIP)	CE RoHS				
WRA4812S-3WR2*			$\pm 12V/\pm 125\text{mA}$						
WRA4815S-3WR2*			$\pm 15V/\pm 100\text{mA}$						
WRB4803S-3WR2*			3.3V/758mA						
WRB4805S-3WR2*			5V/600mA						
WRB4812S-3WR2*			12V/250mA						
WRB4815S-3WR2*			15V/200mA						
WRB4824S-3WR2*			24V/125mA						
WRA0505ZP-3WR2			3W			4.5-9 (5VDC)	$\pm 5V/\pm 300\text{mA}$	1500VDC (DIP)	CE RoHS
WRA0509ZP-3WR2							$\pm 9V/\pm 166\text{mA}$		
WRA0512ZP-3WR2	$\pm 12V/\pm 125\text{mA}$								
WRA0515ZP-3WR2	$\pm 15V/\pm 100\text{mA}$								
WRB0505ZP-3WR2	5V/600mA								
WRB0512ZP-3WR2	12V/250mA								
WRB0515ZP-3WR2	15V/200mA								
WRA1205ZP-3WR2	3W	9-18 (12VDC)		$\pm 5V/\pm 300\text{mA}$	1500VDC (DIP)		CE RoHS		
WRA1209ZP-3WR2				$\pm 9V/\pm 166\text{mA}$					
WRA1212ZP-3WR2				$\pm 12V/\pm 125\text{mA}$					
WRA1215ZP-3WR2			$\pm 15V/\pm 100\text{mA}$						
WRB1203ZP-3WR2			3.3V/909mA						
WRB1205ZP-3WR2			5V/600mA						
WRB1212ZP-3WR2			12V/250mA						
WRB1215ZP-3WR2			15V/200mA						
WRB1224ZP-3WR2			24V/125mA						
WRA2405ZP-3WR2			3W	18-36 (24VDC)		$\pm 5V/\pm 300\text{mA}$		1500VDC (DIP)	CE RoHS
WRA2412ZP-3WR2	$\pm 12V/\pm 125\text{mA}$								
WRA2415ZP-3WR2	$\pm 15V/\pm 100\text{mA}$								
WRB2403ZP-3WR2	3.3V/909mA								
WRB2405ZP-3WR2	5V/600mA								
WRB2405ZP-3WR2	5V/600mA								


Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRB2409ZP-3WR2	3W	18-36 (24VDC)	9V/333mA	1500VDC (DIP)	CE RoHS
WRB2412ZP-3WR2			12V/250mA		
WRB2415ZP-3WR2			15V/200mA		
WRB2424ZP-3WR2			24V/125mA		
WRA4805ZP-3WR2	3W	36-75 (48VDC)	$\pm 5V/\pm 300\text{mA}$	1500VDC (DIP)	CE RoHS
WRA4812ZP-3WR2			$\pm 12V/\pm 125\text{mA}$		
WRA4815ZP-3WR2			$\pm 15V/\pm 100\text{mA}$		
WRA4824ZP-3WR2			$\pm 24V/\pm 63\text{mA}$		
WRB4803ZP-3WR2			3.3V/909mA		
WRB4805ZP-3WR2			5V/600mA		
WRB4812ZP-3WR2			12V/250mA		
WRB4815ZP-3WR2			15V/200mA		
WRB4824ZP-3WR2	24V/125mA				


Note: 1. Series with suffix "ZP" are standard DIP24 packaged with aluminum casing and detailed dimension please refer to illustration;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department
3. Products marked with "*" feature remote pin and remote control function

Package Dimension

WRA/B_S-3WR2 Series LxWxH: 22.00x9.50x12.00(mm)

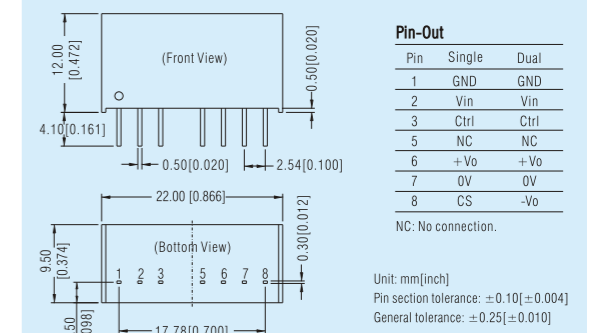

WRA/B_ZP-3WR2 LxWxH: 32.00x20.00x10.80(mm)

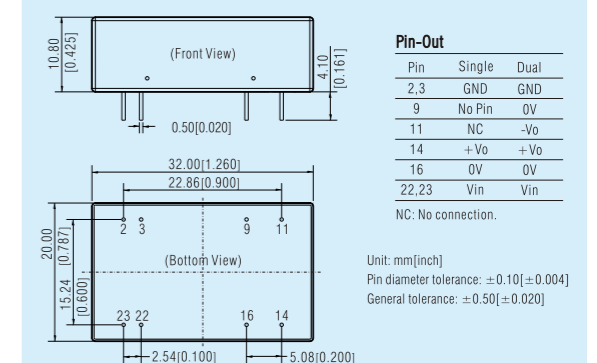

3W 4:1 wide input voltage, 1500VDC isolated & regulated output series


CE RoHS

Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Output continuous short-circuit protection (self-recovery)
- EN60950 approval



Product Program 4:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
PWB2403ZP-3WR2	3W	9-36 (24VDC)	3.3V/909mA	1500VDC (DIP)	CE RoHS
PWB2405ZP-3WR2			5V/600mA		
PWB2409ZP-3WR2			9V/333mA		
PWB2412ZP-3WR2			12V/250mA		
PWB2415ZP-3WR2			15V/200mA		
PWB2424ZP-3WR2			24V/125mA		
PWB4803ZP-3WR2	3W	18-75 (48VDC)	3.3V/909mA	1500VDC (DIP)	CE RoHS
PWB4805ZP-3WR2			5V/600mA		
PWB4809ZP-3WR2			9V/333mA		
PWB4812ZP-3WR2			12V/250mA		
PWB4815ZP-3WR2			15V/200mA		
PWB4824ZP-3WR2			24V/125mA		

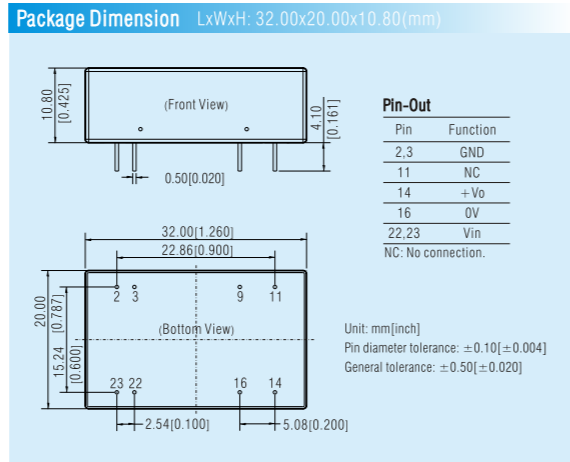

Note: 1. Series with suffix "ZP" are standard DIP24 packaged with aluminum casing and detailed dimension please refer to illustration;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

3W 4:1 wide input voltage, 1500VDC isolated & regulated output series (SMD)


UL US CE RoHS

Features

- Suitable for communication, instrumentation and control electric power applications
- Operating temperature: -40°C to +85°C
- Efficiency up to 84%
- Standby power consumption as low as 0.10W
- International standard pin-out
- Input under-voltage, output short-circuit and over-current protections
- IEC/UL/EN60950 approval



Product Program					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URB2405MT-3WR3	3W	9-36 (24VDC)	5V/600mA	1500VDC (SMD)	UL US CE RoHS
URB2412MT-3WR3			12V/250mA		
URB2415MT-3WR3			15V/200mA		
URB2424MT-3WR3	3W	9-36 (24VDC)	24V/125mA	1500VDC (SMD)	RoHS
URB2403MT-3WR3			3.3V/728mA		
URB2409MT-3WR3			9V/333mA		
URB4803MT-3WR3	3W	18-75 (48VDC)	3.3V/728mA	1500VDC (SMD)	CE RoHS
URB4805MT-3WR3			5V/600mA		
URB4812MT-3WR3			12V/250mA		
URB4815MT-3WR3			15V/200mA		
URB4824MT-3WR3			24V/125mA		

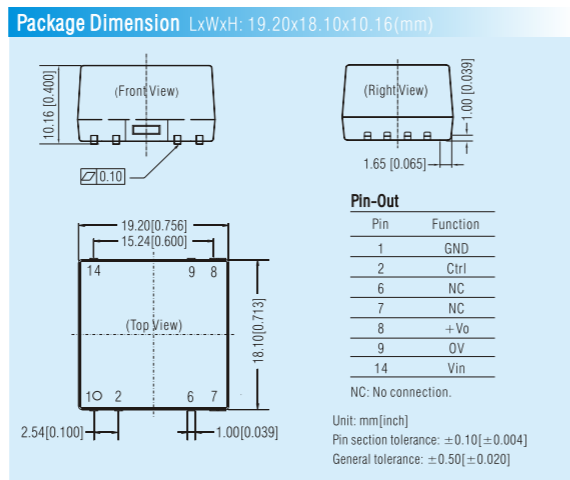

• This catalog is used to introduce our latest products, for more information, please contact our sales department

3W ultra-thin SMD/DIP package wide input isolated & regulated DC/DC converter

RoHS


Features

- Suitable for communication, instrument, industrial control applications
- Efficiency up to 83%
- No-load power consumption as low as 0.1W
- Isolation: 500VAC/1500VDC
- Operating temperature: -40°C to +85°C
- Input under-voltage, output short-circuit, over-current, over-voltage protections
- DIP/SMD packages optional



Product Program					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
VRA2412JMD-3W	3W	18-36(24VDC)	±12V/±130mA	1500VDC (DIP/SMD)	RoHS
VRB0505J(M)T/D-3W			5V/500mA		
VRB0512J(M)T/D-3W			12V/250mA		
VRB0515J(M)T/D-3W			15V/200mA		
VRB0524J(M)T/D-3W			24V/125mA		
URB2403J(M)T/D-3W			3.3V/600mA		
URB2405J(M)T/D-3W	3W	9-36 (24VDC)	5V/600mA	1500VDC (DIP/SMD)	RoHS
URB2412J(M)T/D-3W			12V/250mA		
URB2415J(M)T/D-3W			15V/200mA		
URB2424J(M)T/D-3W			24V/125mA		

Note: 1. U/VRBxxxxJ(M)T/D-3W contains 4 types of products, including U/VRBxxxxJD-3W (DIP package without case), U/VRBxxxxJD-3W (DIP package with case), U/VRBxxxxJT-3W (SMD package without case) and U/VRBxxxxJMT-3W (SMD package with case);
2. Exceeding the maximum input voltage may cause permanent damage; 3. Efficiency is measured in nominal input voltage and rated output load.

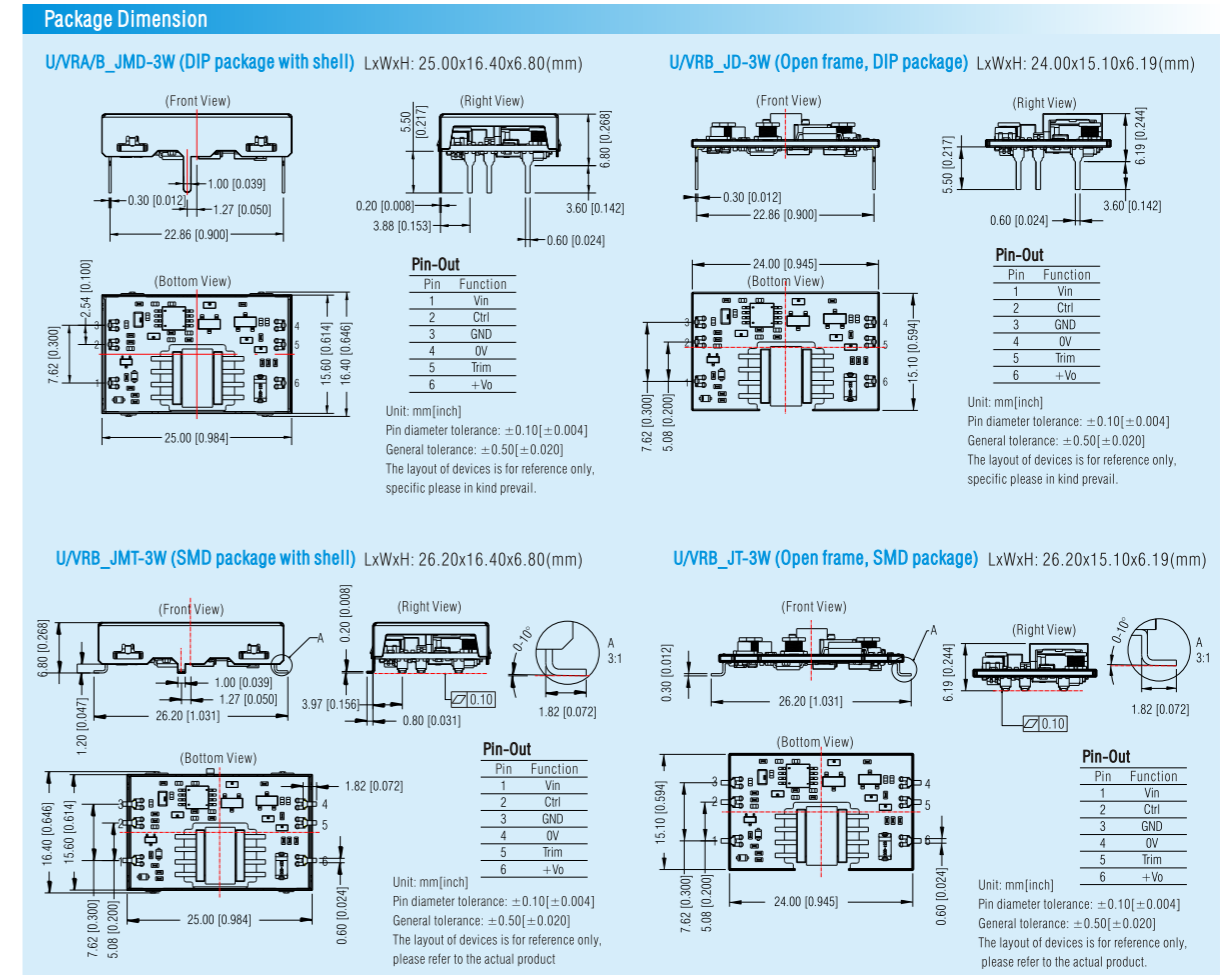


• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

3W 2:1 wide input voltage, 3000VDC isolated & regulated output series

CE RoHS

Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Remote ON/OFF
- Output continuous short-circuit protection (self-recovery)
- EN60950 approval

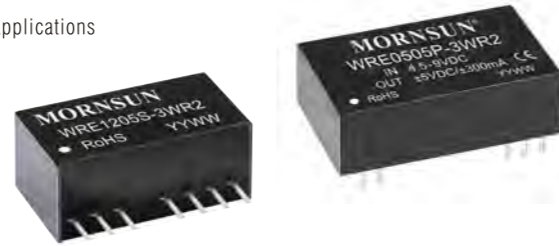


Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRE0505S-3WR2	3W	4.5-9 (5VDC)	±5V/±250mA	3000VDC (SIP)	CE RoHS
WRE0512S-3WR2			±12V/±104mA		
WRE0515S-3WR2			±15V/±83mA		
WRF0505S-3WR2			5V/500mA		
WRF0509S-3WR2			9V/278mA		
WRF0512S-3WR2			12V/208mA		
WRF0515S-3WR2			15V/167mA		
WRE1205S-3WR2	3W	9-18 (12VDC)	±5V/±300mA	3000VDC (SIP)	CE RoHS
WRE1212S-3WR2			±12V/±125mA		
WRE1215S-3WR2			±15V/±100mA		
WRF1203S-3WR2			3.3V/758mA		
WRF1205S-3WR2			5V/600mA		
WRF1209S-3WR2			9V/333mA		
WRF1212S-3WR2			12V/250mA		
WRF1215S-3WR2	15V/200mA				
WRF1224S-3WR2	24V/125mA				
WRE2405S-3WR2	3W	18-36 (24VDC)	±5V/±300mA	3000VDC (SIP)	CE RoHS
WRE2409S-3WR2			±9V/±167mA		
WRE2412S-3WR2			±12V/±125mA		
WRE2415S-3WR2			±15V/±100mA		
WRF2403S-3WR2			3.3V/758mA		
WRF2405S-3WR2			5V/600mA		
WRF2409S-3WR2			9V/333mA		
WRF2412S-3WR2	12V/250mA				
WRF2415S-3WR2	15V/200mA				
WRF2424S-3WR2	24V/125mA				
WRE4805S-3WR2	3W	36-75 (48VDC)	±5V/±300mA	3000VDC (SIP)	CE RoHS
WRE4812S-3WR2			±12V/±125mA		
WRE4815S-3WR2			±15V/±100mA		
WRF4803S-3WR2			3.3V/758mA		
WRF4805S-3WR2			5V/600mA		
WRF4812S-3WR2			12V/250mA		
WRF4815S-3WR2			15V/200mA		
WRE0505P-3WR2	3W	4.5-9 (5VDC)	±5V/±300mA	3000VDC (DIP)	CE RoHS
WRE0512P-3WR2			±12V/±125mA		
WRE0515P-3WR2			±15V/±100mA		
WRF0505P-3WR2			5V/600mA		
WRF0512P-3WR2			12V/250mA		
WRF0515P-3WR2			15V/200mA		
WRE1205P-3WR2			3W		
WRE1209P-3WR2	±9V/±166mA				
WRE1212P-3WR2	±12V/±125mA				
WRE1215P-3WR2	±15V/±100mA				
WRF1203P-3WR2	3.3V/909mA				
WRF1205P-3WR2	5V/600mA				
WRF1212P-3WR2	12V/250mA				
WRF1215P-3WR2	15V/200mA				
WRF1224P-3WR2	24V/125mA				
WRE2405P-3WR2	3W	18-36 (24VDC)	±5V/±300mA	3000VDC (DIP)	CE RoHS
WRE2412P-3WR2			±12V/±125mA		
WRE2415P-3WR2			±15V/±100mA		
WRF2403P-3WR2			3.3V/909mA		
WRF2405P-3WR2			5V/600mA		
WRF2412P-3WR2			12V/250mA		
WRF2415P-3WR2			15V/200mA		
WRF2424P-3WR2	24V/125mA				

Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRE4803P-3WR2	3W	36-75 (48VDC)	±3.3V/±454mA	3000VDC (DIP)	CE RoHS
WRE4805P-3WR2			±5V/±300mA		
WRE4812P-3WR2			±12V/±125mA		
WRE4815P-3WR2			±15V/±100mA		
WRF4803P-3WR2			3.3V/909mA		
WRF4805P-3WR2			5V/600mA		
WRF4812P-3WR2			12V/250mA		
WRF4815P-3WR2			15V/200mA		


Note: 1. Series with suffix "P" are standard DIP24 packaged with plastic casing and detailed dimension please refer to illustration;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

Package Dimension

WRE/F_S-3WR2 Series LxWxH: 22.00x9.50x12.00(mm)

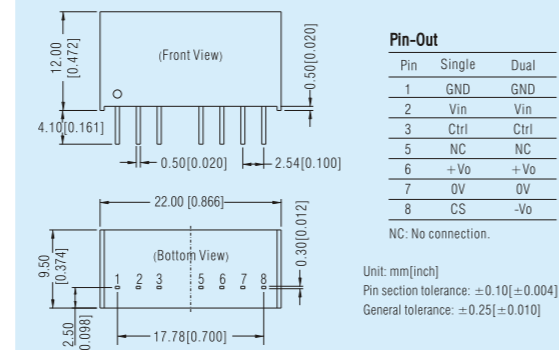

WRE/F_P-3WR2 Series LxWxH: 31.60x20.30x10.20(mm)

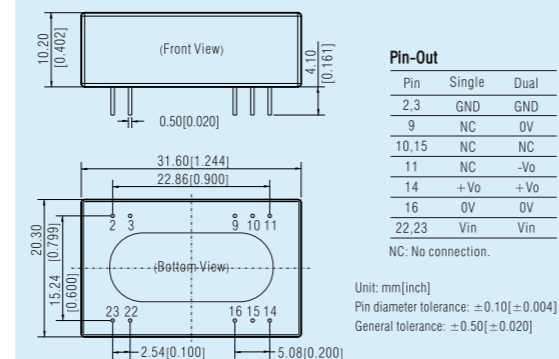

3W 2:1 wide input voltage, 4300VDC isolated & regulated output series (automotive)

RoHS


Features

- Suitable for automotive application
- Operating temperature: -40°C to +105°C
- Efficiency up to 82%
- Isolation: 4300VDC
- Materials meet AEC-Q 100 standards
- Internal surface mounted design
- International standard pin-out



Product Program					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
CWR1215S-3W	3W	7-18 (12VDC)	15V/200mA	4300VDC	RoHS

Package Dimension LxWxH: 22.00x9.50x12.00(mm)

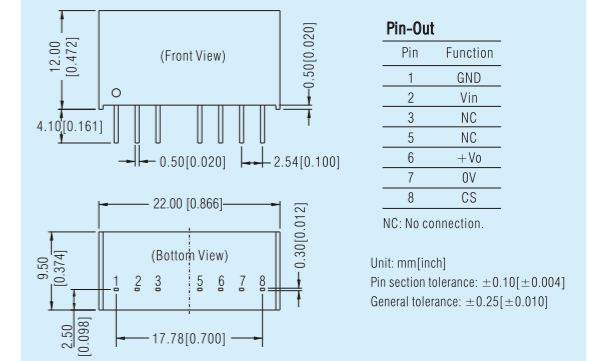

6W 8:1 ultra-wide input voltage, 1500VDC isolated & regulated output series (automotive) RoHS


Features

- Suitable for automotive, industrial control, electric power, instrument, communication applications
- Meets AEC-Q100, EN62368 certifications
- Manufacturing process meets IATF16949 standard
- EMI meets class 3 of CISPR25/EN55025
- 8:1 wide input voltage(4.5-36VDC)
- Operating temperature: -40°C to +105°C
- Efficiency up to 85%
- No-load power consumption as low as 0.06W
- Isolation: 1500VDC
- Input under-voltage, output short-circuit, over-current, over-voltage protections
- International standard pin-out



Product Program						
Model Number	Power	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (mA)Max./Min	Isolation	Certification
CUWB1203YMD-6WR3	6W	4.5-36 (12VDC)	3.3	900/0	1500/0	CE RoHS
CUWB1205YMD-6WR3			5	720/0	1200/0	
CUWB1212YMD-6WR3			12	300/0	500/0	
CUWB1215YMD-6WR3			15	240/0	400/0	
CUWB1224YMD-6WR3			24	150/0	250/0	

Package Dimension LxWxH: 25.40x25.40x11.70(mm)

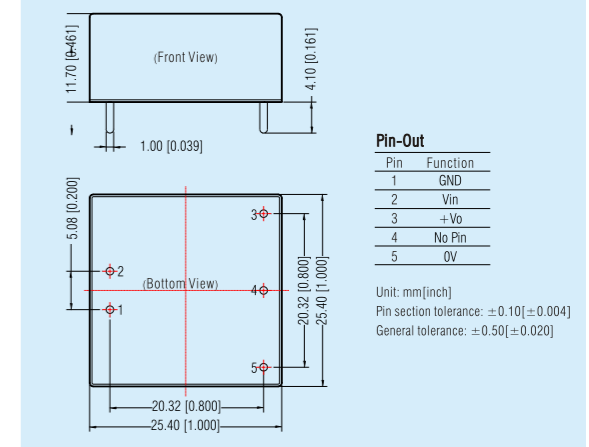

6W 2:1 wide input voltage, 3000VDC isolated & regulated triple output series (automotive) CE RoHS

Features


- Suitable for automotive application
- No-load power consumption as low as 0.12W
- Operating temperature: -40°C to +105°C
- Efficiency up to 82%
- Isolation: 3000VDC
- Materials meet AEC-Q 100 standards
- Emissions meets EN55025/CISPR25 CLASS 4 standards
- Input under-voltage protection, output short-circuit, over-current, over-voltage protections
- SMD package
- EN62368 approved



Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage(VDC)			Output Current(mA) Max./Min.			Isolation	Certification
			Vo1	Vo2	Vo3	Io1	Io2	Io3		
CVRC1215JD-6WR3	6W	9-18 (12VDC)	15V	15V	15V	200/0	100/0	100/0	3000VDC	RoHS CE

Package Dimension LxWxH: 42.10x25.00x10.50(mm)

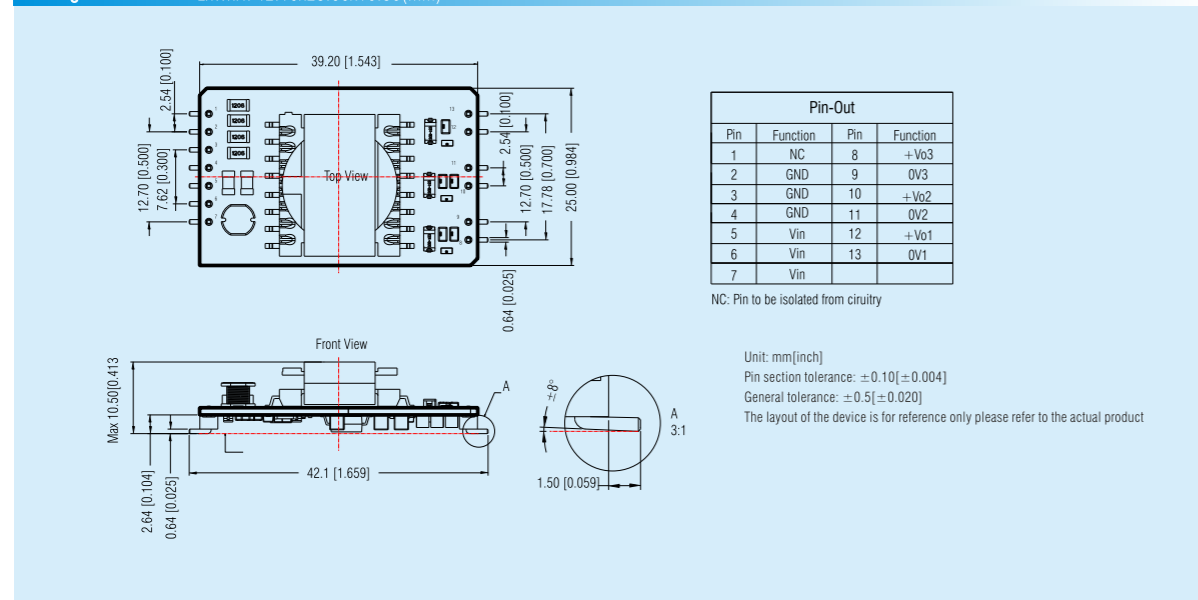

• This catalog is used to introduce our latest products, for more information, please contact our sales department

3W 2:1 wide input voltage, 3000VDC isolated & regulated output series CE RoHS

Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Remote ON/OFF
- Output continuous short-circuit protection (self-recovery)
- EN60950 approval



Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRE0505S-3WR2	3W	4.5-9 (5VDC)	$\pm 5V/\pm 250mA$	3000VDC (SIP)	CE RoHS
WRE0512S-3WR2			$\pm 12V/\pm 104mA$		
WRE0515S-3WR2			$\pm 15V/\pm 83mA$		
WRF0505S-3WR2			5V/500mA		
WRF0509S-3WR2			9V/278mA		
WRF0512S-3WR2			12V/208mA		
WRF0515S-3WR2			15V/167mA		
WRE1205S-3WR2	3W	9-18 (12VDC)	$\pm 5V/\pm 300mA$	3000VDC (SIP)	CE RoHS
WRE1212S-3WR2			$\pm 12V/\pm 125mA$		
WRE1215S-3WR2			$\pm 15V/\pm 100mA$		
WRF1203S-3WR2			3.3V/758mA		
WRF1205S-3WR2			5V/600mA		
WRF1209S-3WR2			9V/333mA		
WRF1212S-3WR2			12V/250mA		
WRF1215S-3WR2	15V/200mA				
WRF1224S-3WR2	24V/125mA				
WRE2405S-3WR2	3W	18-36 (24VDC)	$\pm 5V/\pm 300mA$	3000VDC (SIP)	CE RoHS
WRE2409S-3WR2			$\pm 9V/\pm 167mA$		
WRE2412S-3WR2			$\pm 12V/\pm 125mA$		
WRE2415S-3WR2			$\pm 15V/\pm 100mA$		
WRF2403S-3WR2			3.3V/758mA		
WRF2405S-3WR2			5V/600mA		
WRF2409S-3WR2			9V/333mA		
WRF2412S-3WR2	12V/250mA				
WRF2415S-3WR2	15V/200mA				
WRF2424S-3WR2	24V/125mA				
WRE4805S-3WR2	3W	36-75 (48VDC)	$\pm 5V/\pm 300mA$	3000VDC (SIP)	CE RoHS
WRE4812S-3WR2			$\pm 12V/\pm 125mA$		
WRE4815S-3WR2			$\pm 15V/\pm 100mA$		
WRF4803S-3WR2			3.3V/758mA		
WRF4805S-3WR2			5V/600mA		
WRF4812S-3WR2			12V/250mA		
WRF4815S-3WR2			15V/200mA		
WRE0505P-3WR2	3W	4.5-9 (5VDC)	$\pm 5V/\pm 300mA$	3000VDC (DIP)	CE RoHS
WRE0512P-3WR2			$\pm 12V/\pm 125mA$		
WRE0515P-3WR2			$\pm 15V/\pm 100mA$		
WRF0505P-3WR2			5V/600mA		
WRF0512P-3WR2			12V/250mA		
WRF0515P-3WR2			15V/200mA		
WRE1205P-3WR2			3W		
WRE1209P-3WR2	$\pm 9V/\pm 166mA$				
WRE1212P-3WR2	$\pm 12V/\pm 125mA$				
WRE1215P-3WR2	$\pm 15V/\pm 100mA$				
WRF1203P-3WR2	3.3V/909mA				
WRF1205P-3WR2	5V/600mA				
WRF1212P-3WR2	12V/250mA				
WRF1215P-3WR2	15V/200mA				
WRF1224P-3WR2	24V/125mA				
WRE2405P-3WR2	3W	18-36 (24VDC)	$\pm 5V/\pm 300mA$	3000VDC (DIP)	CE RoHS
WRE2412P-3WR2			$\pm 12V/\pm 125mA$		
WRE2415P-3WR2			$\pm 15V/\pm 100mA$		
WRF2403P-3WR2			3.3V/909mA		
WRF2405P-3WR2			5V/600mA		
WRF2412P-3WR2			12V/250mA		
WRF2415P-3WR2			15V/200mA		
WRF2424P-3WR2	24V/125mA				


Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRE4803P-3WR2	3W	36-75 (48VDC)	$\pm 3.3V/\pm 454mA$	3000VDC (DIP)	CE RoHS
WRE4805P-3WR2			$\pm 5V/\pm 300mA$		
WRE4812P-3WR2			$\pm 12V/\pm 125mA$		
WRE4815P-3WR2			$\pm 15V/\pm 100mA$		
WRF4803P-3WR2			3.3V/909mA		
WRF4805P-3WR2			5V/600mA		
WRF4812P-3WR2			12V/250mA		
WRF4815P-3WR2			15V/200mA		


Note: 1. Series with suffix "P" are standard DIP24 packaged with plastic casing and detailed dimension please refer to illustration;
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-BQ2D, FI-BQ3D and FT-BX1D are available. For more information, please contact our sales department.

Package Dimension

WRE/F_S-3WR2 Series LxWxH: 22.00x9.50x12.00(mm)

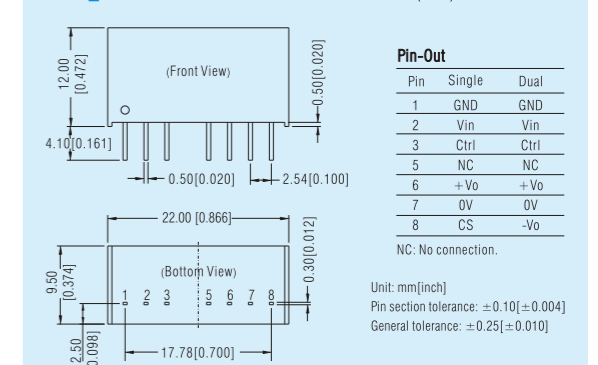

WRE/F_P-3WR2 Series LxWxH: 31.60x20.30x10.20(mm)

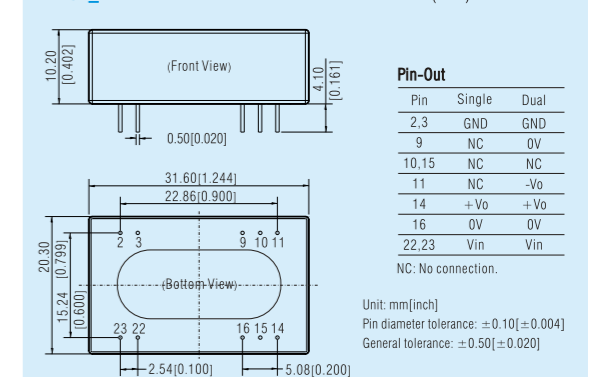


• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

3-10W open-frame wide input isolated & regulated DC/DC converter

Features

- Widely used in commucation applications such as FSU, battery cloud management system, DC meter, environment monitoring system
- 2:1 wide input voltage
- Isolation: 1500VDC
- Input under-voltage, output short-circuit, over-current protections
- Operating temperature: -40°C to +85°C
- International standard pin-out
- Meet EN62368 certification





Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification		
VCB4805SO-3WR3	3W	36-75 (48VDC)	5V/600mA	1500VDC (SIP)	CE RoHS		
VCB4812SO-3WR3			12V/250mA				
VCB4815SO-3WR3			15V/200mA				
VCB4824SO-3WR3			24V/125mA				
VCB4805SO-6WR3	6W	36-75 (48VDC)	5V/1200mA			1500VDC (DIP)	CE RoHS
VCB4812SO-6WR3			12V/500mA				
VCB4815SO-6WR3			15V/400mA				
VCB4824SO-6WR3			24V/250mA				
VCB4805SBO-10WR3	10W	36-75 (48VDC)	5V/2000mA	1500VDC (DIP)	CE RoHS		
VCB4812SBO-10WR3			12V/833mA				
VCB4815SBO-10WR3			15V/667mA				
VCB4824SBO-10WR3			24V/417mA				

Package Dimension

VCB_SO-3WR3/VCB_SO-6WR3 Series LxWxH: 22.00x8.20x12.80(mm)

VCB_SBO-10WR3 Series LxWxH: 33.02x22.86x10.27(mm)

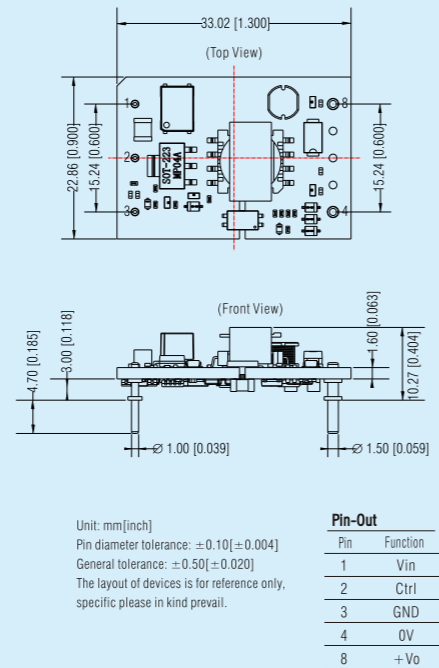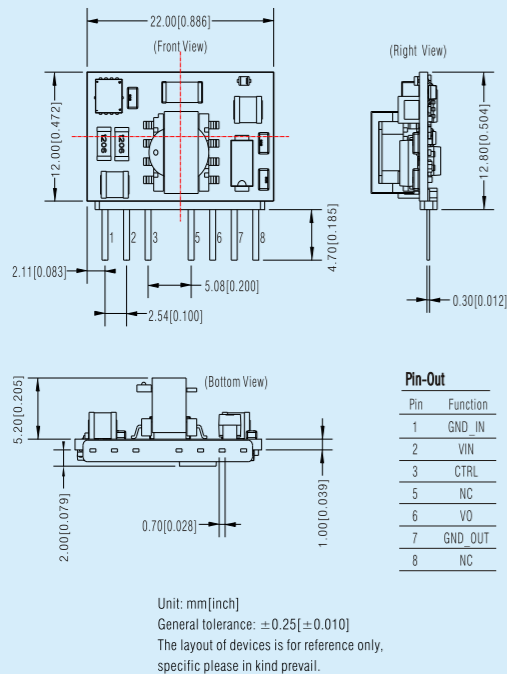

6-20W wide input voltage, 6000VDC high isolated & regulated output series (medical)



Features

- EN60601-1 approval (meet 3rd edition medical certification, 2xMOPP)
- Specialized for medical and energy storage system
- 4:1 ultra wide input voltage range
- High efficiency up to 85%
- Standby power consumption as low as 0.12W
- Isolation: 6000VDC(enhanced)
- Operating temperature range: -40°C to +85°C
- International standard pin-out
- Input under-voltage, output over-voltage, over-current and short-circuit protections



Product Program



Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
URH2405P-6WR3	6W	9-36 (24VDC)	5V/1200mA	6000VDC	CE RoHS
URH2406P-6WR3			6V/1000mA		
URH2409P-6WR3			9V/667mA		
URH2412P-6WR3			12V/500mA		
URH2415P-6WR3			15V/400mA		
URH2424P-6WR3	24V/250mA				
URH4805P-6WR3	6W	18-75 (48VDC)	5V/1200mA	6000VDC	CE RoHS
URH4809P-6WR3			9V/667mA		
URH4812P-6WR3			12V/500mA		
URH4815P-6WR3			15V/400mA		
URH4824P-6WR3	24V/250mA				
URH2403LP-20WR3	20W	9-36 (24VDC)	3.3V/5000mA	5000VAC	CE (pending) RoHS
URH2405LP-20WR3			5V/4000mA		
URH2412LP-20WR3			12V/1666mA		
URH2415LP-20WR3			15V/1333mA		
URH2424LP-20WR3			24V/833mA		
URH4803LP-20WR3	20W	18-75 (48VDC)	3.3V/5000mA	5000VAC	CE (pending) RoHS
URH4805LP-20WR3			5V/4000mA		
URH4812LP-20WR3			12V/1666mA		
URH4815LP-20WR3			15V/1333mA		
URH4824LP-20WR3	24V/833mA				

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-802D, FI-803D and FT-BX1D are available. For more information, please contact our sales department.

Package Dimension

URH_P-6WR3 Series LxWxH: 31.60x20.30x10.20(mm)

URH_LP-20WR3 Series LxWxH: 51.50x26.50x12.00(mm)

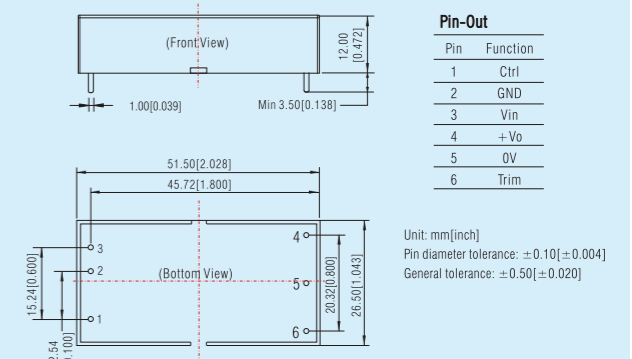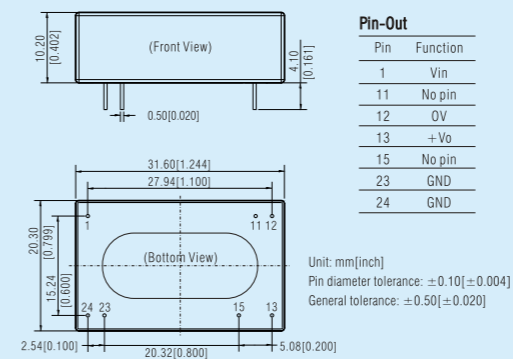

6W 2:1 wide input voltage, isolated & regulated output series

Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C / -40°C to +105°C
- Standby power consumption as low as 0.12W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval, EN62368 approval







Product Program 2:1 Input series									
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
VRA1205YMD-6WR3	6W	9-18 (12VDC)	±5V/±600mA	1500VDC (DIP)	UL CB CE RoHS				
VRA1212YMD-6WR3			±12V/±250mA						
VRB1205YMD-6WR3			5V/1200mA						
VRB1212YMD-6WR3			12V/500mA						
VRA2405YMD-6WR3	6W	18-36 (24VDC)	±5V/±600mA	1500VDC (DIP)	UL CB CE RoHS				
VRA2412YMD-6WR3			±12V/±250mA						
VRA2415YMD-6WR3			±15V/±200mA						
VRB2403YMD-6WR3			3.3V/1500mA						
VRB2405YMD-6WR3			5V/1200mA						
VRB2409YMD-6WR3			9V/667mA						
VRB2412YMD-6WR3			12V/500mA						
VRB2415YMD-6WR3			15V/400mA						
VRB2424YMD-6WR3	6W	36-75 (48VDC)	24V/250mA	1500VDC (DIP)	RoHS				
VRB4803YMD-6WR3			3.3V/1500mA						
VRB4805YMD-6WR3			5V/1200mA						
VRB4812YMD-6WR3			12V/500mA						
VRB4815YMD-6WR3			15V/400mA						
VRB4824YMD-6WR3			24V/250mA						
VRA0505ZP-6WR3			6W			4.5-9 (5VDC)	±5V/±600mA	1500VDC (DIP)	CE RoHS
VRA0512ZP-6WR3							±12V/±250mA		
VRA0515ZP-6WR3							±15V/±200mA		
VRA0524ZP-6WR3							±24V/±125mA		
VRB0505ZP-6WR3							5V/1200mA		
VRB0512ZP-6WR3							12V/500mA		
VRB0515ZP-6WR3	15V/400mA								
VRB0524ZP-6WR3	24V/250mA								
VRA1205ZP-6WR3	6W	9-18 (12VDC)		±5V/±600mA	1500VDC (DIP)		CE RoHS		
VRA1212ZP-6WR3				±12V/±250mA					
VRA1215ZP-6WR3				±15V/±200mA					
VRA1224ZP-6WR3				±24V/±125mA					
VRB1203ZP-6WR3			3.3V/1500mA						
VRB1205ZP-6WR3			5V/1200mA						
VRB1212ZP-6WR3			12V/500mA						
VRB1215ZP-6WR3			15V/400mA						
VRB1224ZP-6WR3			24V/250mA						
VRA2405ZP-6WR3			6W	18-36 (24VDC)		±5V/±600mA		1500VDC (DIP)	CE RoHS
VRA2412ZP-6WR3						±12V/±250mA			
VRA2415ZP-6WR3						±15V/±200mA			
VRA2424ZP-6WR3	±24V/±125mA								
VRB2403ZP-6WR3	3.3V/1500mA								
VRB2405ZP-6WR3	5V/1200mA								
VRB2412ZP-6WR3	12V/500mA								
VRB2415ZP-6WR3	15V/400mA								
VRB2424ZP-6WR3	24V/250mA								
VRA4805ZP-6WR3	6W	36-75 (48VDC)			±5V/±600mA	1500VDC (DIP)	CE RoHS		
VRA4812ZP-6WR3					±12V/±250mA				
VRA4815ZP-6WR3					±15V/±200mA				
VRA4824ZP-6WR3			±24V/±125mA						
VRB4803ZP-6WR3			3.3V/1500mA						
VRB4805ZP-6WR3			5V/1200mA						
VRB4812ZP-6WR3			12V/500mA						
VRB4815ZP-6WR3			15V/400mA						
VRB4824ZP-6WR3			24V/250mA						
VRB1203S-6WR3*			6W	9-18 (12VDC)	3.3V/1350mA			1600VDC (SIP)	CE RoHS
VRB1205S-6WR3*					5V/1200mA				
VRB1209S-6WR3*					9V/667mA				
VRB1212S-6WR3*	12V/500mA								
VRB1215S-6WR3*	15V/400mA								
VRB1224S-6WR3*	24V/250mA								
VRB2403S-6WR3*	3.3V/1350mA								
VRB2405S-6WR3*	5V/1200mA								
VRB2409S-6WR3*	9V/667mA								
VRB2412S-6WR3*	12V/500mA								
VRB2415S-6WR3*	15V/400mA								

Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
VRB2412S-6WR3*	6W	18-36 (24VDC)	12V/500mA	1600VDC (SIP)	CE RoHS
VRB2415S-6WR3*			15V/400mA		
VRB2424S-6WR3*			24V/250mA		

Note: 1. Series with suffix "ZP" are standard DIP24 packaged with aluminum alloy casing, with suffix "YMD" are 1*1 packaged with aluminum alloy casing. And detailed dimension please refer to illustration; 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department. 3. Products marked with " *" feature -40°C to +105°C operating temperature.


Package Dimension

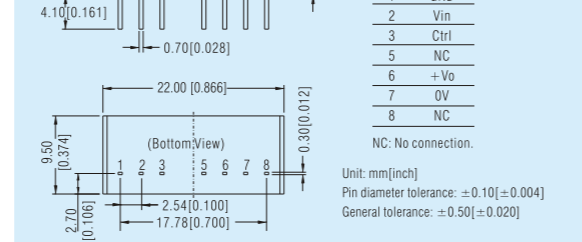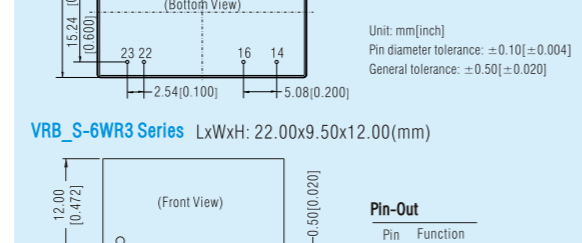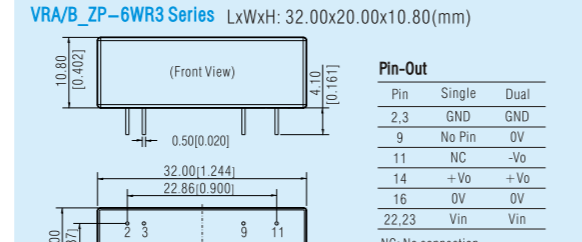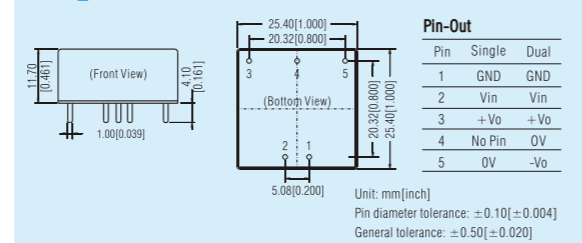

6W ultra-thin wide input voltage, isolated & regulated SMD/DIP DC/DC converter

Features


- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C
- Isolation: 500VAC
- Standby power consumption as low as 0.12W
- Efficiency up to 86%
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- DIP/SMD packages optional

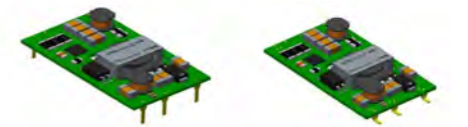


Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
VRB1205J(M)/D/T-6W	6W	9-18 (12VDC)	5V/1200mA	1500VDC (DIP/SMD)	UL CE CB RoHS
VRB1212J(M)/D/T-6W			12V/500mA		
VRB1215J(M)/D/T-6W			15V/400mA		
VRB2403J(M)/D/T-6W			3.3V/1500mA		
VRB2405J(M)/D/T-6W	6W	18-36 (24VDC)	5V/1200mA	1500VDC (DIP/SMD)	UL CE CB RoHS
VRB2412J(M)/D/T-6W			12V/500mA		
VRB2415J(M)/D/T-6W			15V/400mA		
VRB2415J(M)/D/T-6W			15V/400mA		

Note: 1. VRB_J(M)/D/T-6W includes 4 types: VRB_JD-6W (DIP package without shell), VRB_JMD-6W (DIP package with shell), VRB_JT-6W (SMD package without shell) and VRB_JTJ-6W (SMD package without shell) 2. Once input voltage exceeds the limit, it may cause irreversible damage 3. The above efficiency value is tested in the case of nominal input voltage and rated output load


Package Dimension

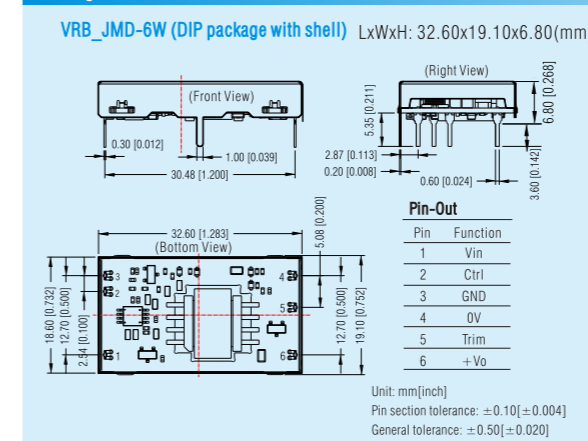


VRB_JD-6W (Open frame, DIP package) LxWxH: 31.60x18.10x6.10(mm)

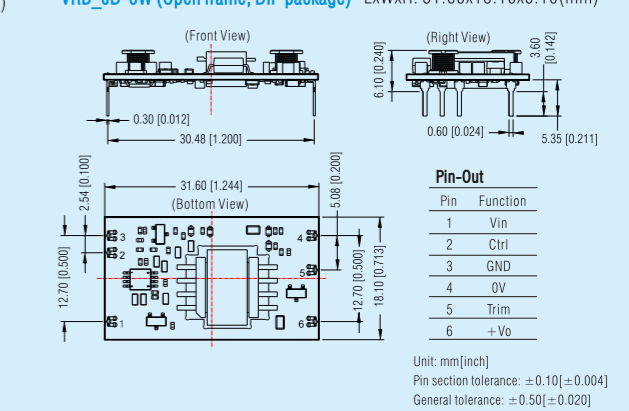

VRB_JT-6W (Open frame, SMD package) LxWxH: 33.78x18.10x6.30(mm)

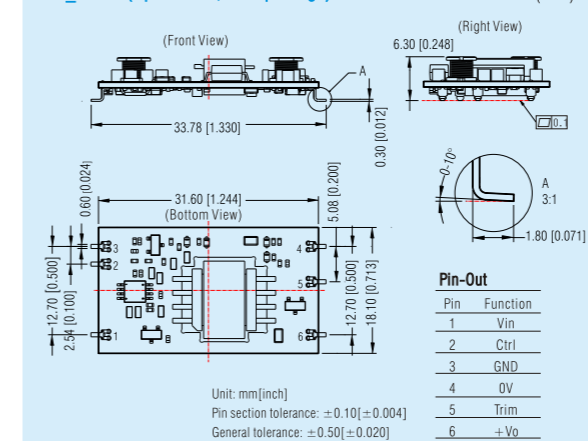

VRB_JMT-6W (SMD package with shell) LxWxH: 33.78x19.10x7.00(mm)

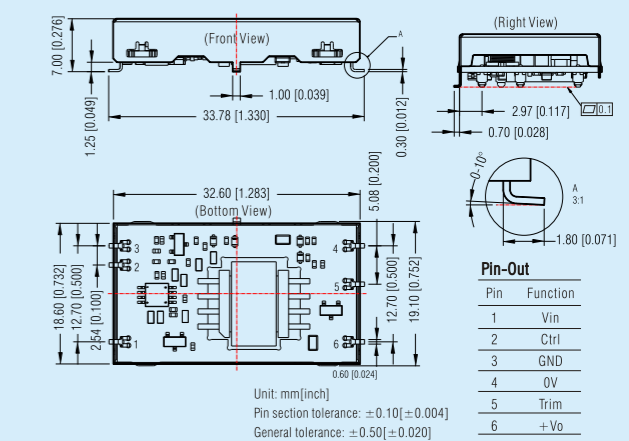

• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

6W 4:1 wide input voltage, isolated & regulated output series

Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C / -40°C to +105°C
- Standby power consumption as low as 0.12W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval



Product Program 4:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URA2405YMD-6WR3	6W	9-36 (24VDC)	±5V/±600mA	1500VDC (DIP)	cULus CB CE RoHS
URA2412YMD-6WR3			±12V/±250mA		
URA2415YMD-6WR3			±15V/±200mA		
URA2424YMD-6WR3			±24V/±125mA		
URB2403YMD-6WR3			3.3V/1500mA		
URB2405YMD-6WR3			5V/1200mA		
URB2409YMD-6WR3			9V/667mA		
URB2412YMD-6WR3			12V/500mA		
URB2415YMD-6WR3			15V/400mA		
URB2424YMD-6WR3	24V/250mA				
URA4805YMD-6WR3	6W	18-75 (48VDC)	±5V/±600mA	1500VDC (DIP)	cULus CB CE RoHS
URA4812YMD-6WR3			±12V/±250mA		
URA4815YMD-6WR3			±15V/±200mA		
URB4803YMD-6WR3			3.3V/1500mA		
URB4805YMD-6WR3			5V/1200mA		
URB4812YMD-6WR3			12V/500mA		
URB4815YMD-6WR3			15V/400mA		
URB4824YMD-6WR3			24V/250mA		
URA2405ZP-6WR3			6W		
URA2409ZP-6WR3	±9V/±333mA				
URA2412ZP-6WR3	±12V/±250mA				
URA2415ZP-6WR3	±15V/±200mA				
URA2424ZP-6WR3	±24V/±125mA				
URB2403ZP-6WR3	3.3V/1500mA				
URB2405ZP-6WR3	5V/1200mA				
URB2409ZP-6WR3	9V/667mA				
URB2412ZP-6WR3	12V/500mA				
URB2415ZP-6WR3	15V/400mA				
URB2424ZP-6WR3	24V/250mA				
URA4805ZP-6WR3	6W	18-75 (48VDC)	±5V/±600mA	1500VDC (DIP)	cULus CB CE RoHS RoHS
URA4812ZP-6WR3			±12V/±250mA		
URA4815ZP-6WR3			±15V/±200mA		
URB4803ZP-6WR3			3.3V/1500mA		
URB4805ZP-6WR3			5V/1200mA		
URB4809ZP-6WR3			9V/667mA		
URB4812ZP-6WR3			12V/500mA		
URB4815ZP-6WR3			15V/400mA		
URB4824ZP-6WR3			24V/250mA		
URE2405P-6WR3	6W	9-36 (24VDC)	±5V/±600mA	3000VDC (DIP)	cULus CB CE RoHS
URE2412P-6WR3			±12V/±250mA		
URE2415P-6WR3			±15V/±200mA		
URF2403P-6WR3			3.3V/1500mA		
URF2405P-6WR3			5V/1200mA		
URF2409P-6WR3			9V/667mA		
URF2412P-6WR3			12V/500mA		
URF2415P-6WR3			15V/400mA		
URF2424P-6WR3			24V/250mA		
URF4803P-6WR3	6W	18-75 (48VDC)	3.3V/1500mA	3000VDC (DIP)	cULus CB CE RoHS
URF4805P-6WR3			5V/1200mA		
URF4812P-6WR3			12V/500mA		
URF4815P-6WR3			15V/400mA		
URF4824P-6WR3			24V/250mA		


Note: 1. Series with suffix "P" are standard DIP24 packaged with plastic casing, with suffix "ZP" are standard DIP24 packaged with aluminum alloy casing, with suffix "YMD" are 1"1 packaged with aluminum alloy casing. And detailed dimension please refer to illustration;
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.
 3. Products marked with "*" feature -40°C to +105°C operating temperature

Product Program 4:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URB2403S-6WR3*	6W	9-36 (24VDC)	3.3V/1350mA	1600VDC (SIP)	CE RoHS
URB2405S-6WR3*			5V/1200mA		
URB2409S-6WR3*			9V/667mA		
URB2412S-6WR3*			12V/500mA		
URB2415S-6WR3*			15V/400mA		
URB2424S-6WR3*			24V/250mA		

Package Dimension


URA/B_YMD-6WR3 Series LxWxH: 25.40x25.40x11.70 (mm)



Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo

Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

URB-S-6WR3 Series LxWxH: 22.00x9.50x12.00 (mm)




Pin	Function
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	OV
8	NC

Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

Package Dimension

URA/B_ZP-6WR3, URE/F_P-6WR3 Series

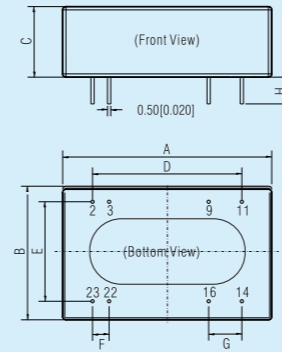

Pin	URA/B_ZP-6WR3	
	Single	Dual
2,3	GND	GND
9	No Pin	OV
11	NC	-Vo
14	+Vo	+Vo
16	OV	OV
22,23	Vin	Vin

NC: No connection.
 Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

Outline & Dimensions

NO.	URA/B_ZP-6WR3	URE/F_P-6WR3
A	32.00	31.60
B	20.00	20.30
C	10.80	10.20
D	22.86	22.86
E	15.24	15.24
F	2.54	2.54
G	5.08	5.08
H	4.10	4.10

Pin-Out

Pin	URE_P-6WR3	URF_P-6WR3
2,3	GND	GND
9	OV	No Pin
11	-Vo	NC
14	+Vo	+Vo
16	OV	OV
22,23	Vin	Vin

DC/DC converter specialized for super-capacitor and lithium battery-powered

RoHS

Features

- Suitable for super-capacitor and lithium battery-powered applications
- Constant voltage & current output
- Adjustable output voltage
- Internal SMD construction
- Remote ON/OFF
- Output short-circuit protection




Product Program

Series	Input Voltage (VDC) Nominal (Range)	Output		Effi (%) (typ)	Certification
		Output Voltage (VDC)	Constant Current (mA)		
URF2428LP-700	9-36 (24VDC)	0-28.5	700	88	RoHS
URB24A5YMD-1000	9-36 (24VDC)	0-5.06	1000	78	

Note: Special input, output and package customization is acceptable.

Package Dimension


URB24A5YMD-1000 Series LxWxH: 25.40x25.40x11.70 (mm)



Pin	Function
1	GND
2	Vin
3	Vin
4	+Vo
6	OV

Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

URF2428LP-700 Series LxWxH: 51.50x26.50x12.00 (mm)



Pin	Function
1	GND
2	Vin
3	+Vo
4	Trim
5	OV
6	Ctrl


Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

10W ultra-thin wide input voltage, isolated & regulated SMD/DIP DC/DC converter

CE CB RoHS

Features

- 4:1 wide input voltage range
- Efficiency up to 88%
- Standby power consumption as low as 0.096W
- Isolation: 500VAC / 1500VDC
- Operating temperature: -40°C to +85°C
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- DIP/SMD packages optional

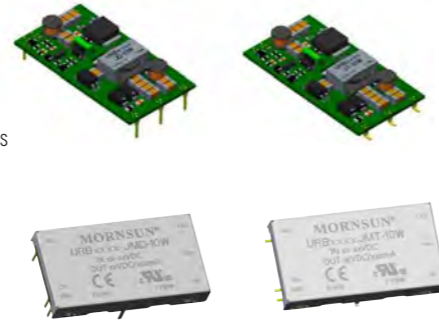


Product Program 4:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URB2405J(M)D/T-10W	10W	9-36 (24VDC)	5V/2000mA	1500VDC (DIP/SMD)	CE CB RoHS
URB2412J(M)D/T-10W			12V/833mA		
URB2415J(M)D/T-10W			15V/667mA		


Note
 1. URBxxxxJ(M)D/T-10W includes 4 types: VRB JD-10W (DIP package without shell), URBxxxxJMD-10W (DIP package with shell), URBxxxxJT-10W (SMD package without shell) and URBxxxxJMT-10W (SMD package with shell)
 2. Once input voltage exceeds the limit, it may cause irreversible damage
 3. The above efficiency value is tested in the case of nominal input voltage and rated output load

Package Dimension


URB JD-10W (Open frame, DIP package) LxWxH: 39.20x20.80x6.10 (mm)

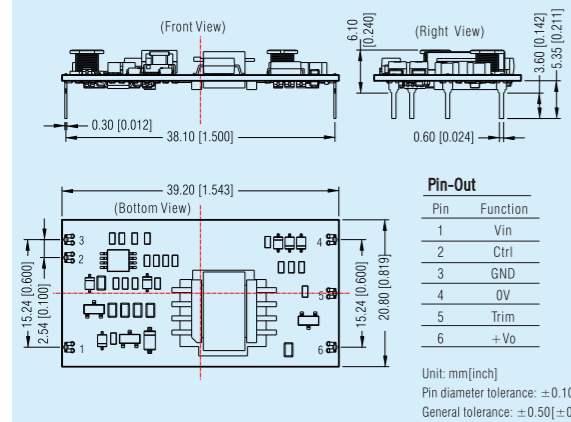


URB JMD-10W (DIP package with shell) LxWxH: 40.20x22.00x6.80 (mm)

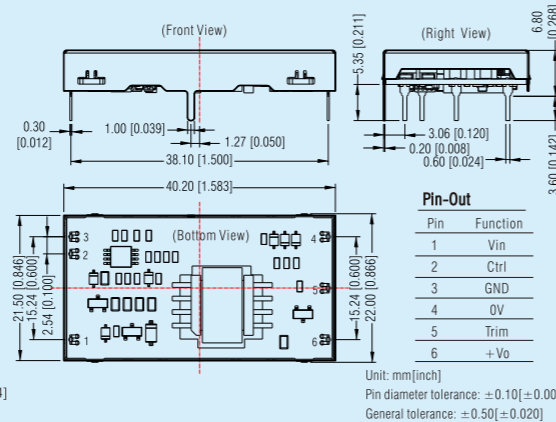

URB JT-10W (Open frame, SMD package) LxWxH: 41.40x20.80x6.30 (mm)

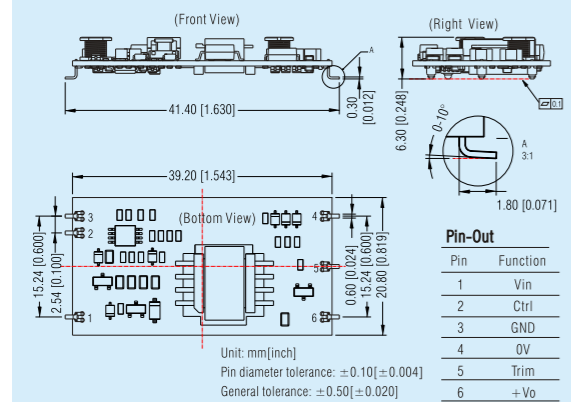

URB JMT-10W (SMD package with shell) LxWxH: 41.40x22.00x7.00 (mm)

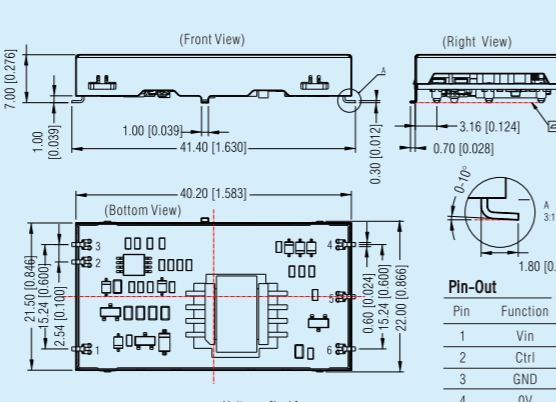

• This catalog is used to introduce our latest products, for more information, please contact our sales department

10W 2:1/4:1 wide input voltage, isolated & regulated output series

CE CB RoHS

Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C
- Standby power consumption as low as 0.11W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/UL/EN62368 approval



Product Program 4:1 Input series									
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
URA2405YMD-10WR3	10W	9-36 (24VDC)	±5V/±1000mA	1500VDC (DIP)	CE CB RoHS				
URA2409YMD-10WR3			±9V/±555mA						
URA2412YMD-10WR3			±12V/±416mA						
URA2415YMD-10WR3			±15V/±333mA						
URA2424YMD-10WR3			±24V/±208mA						
URB2403YMD-10WR3			3.3V/2400mA						
URB2405YMD-10WR3			5V/2000mA						
URB2409YMD-10WR3			9V/1111mA						
URB2412YMD-10WR3			12V/833mA						
URB2415YMD-10WR3			15V/667mA						
URB2424YMD-10WR3			24V/416mA						
URA4805YMD-10WR3			±5V/±1000mA			18-75 (48VDC)	±12V/±416mA	1500VDC (DIP)	CE CB RoHS
URA4812YMD-10WR3			±15V/±333mA						
URA4815YMD-10WR3			±15V/±333mA						
URA4824YMD-10WR3	±24V/±208mA								
URB4803YMD-10WR3	3.3V/2400mA								
URB4812YMD-10WR3	12V/833mA								
URB4815YMD-10WR3	15V/667mA								
URB4824YMD-10WR3	24V/416mA								
URE2405LP-10WR3	10W	9-36 (24VDC)	±5V/±1000mA	3000VDC (DIP)	CE CB RoHS				
URE2412LP-10WR3			±12V/±416mA						
URE2415LP-10WR3			±15V/±333mA						
URF2403LP-10WR3			3.3V/2400mA						
URF2405LP-10WR3			5V/2000mA						
URF2409LP-10WR3			9V/1111mA						
URF2412LP-10WR3			12V/833mA						
URF2415LP-10WR3	15V/667mA								
URF2424LP-10WR3	24V/416mA								
URE4805LP-10WR3	10W	18-75 (48VDC)	±5V/±1000mA	3000VDC (DIP)	CE CB RoHS				
URE4812LP-10WR3			±12V/±416mA						
URE4815LP-10WR3			±15V/±333mA						
URF4803LP-10WR3			3.3V/2400mA						
URF4805LP-10WR3			5V/2000mA						
URF4812LP-10WR3			12V/833mA						
URF4815LP-10WR3			15V/667mA						
URF4824LP-10WR3	24V/416mA								
URA2405ZP-10WR3	10W	9-36 (24VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS				
URA2412ZP-10WR3			±12V/±416mA						
URA2415ZP-10WR3			±15V/±333mA						
URB2403ZP-10WR3			3.3V/2400mA						
URB2412ZP-10WR3			12V/833mA						
URB2415ZP-10WR3			15V/667mA						
URB2424ZP-10WR3			24V/416mA						
URA4805ZP-10WR3			±5V/±1000mA			18-75 (48VDC)	±12V/±416mA	1500VDC (DIP)	CE RoHS
URA4812ZP-10WR3			±15V/±333mA						
URA4815ZP-10WR3			±15V/±333mA						
URB4803ZP-10WR3			3.3V/2400mA						
URB4805ZP-10WR3			5V/2000mA						
URB4812ZP-10WR3			12V/833mA						
URB4815ZP-10WR3			15V/667mA						
URB4824ZP-10WR3	24V/416mA								
VRB1205YMD-10WR3	10W	9-18 (12VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS				
VRB1212YMD-10WR3			±12V/±416mA						
VRB1215YMD-10WR3			±15V/±333mA						
VRB1224YMD-10WR3			±24V/±208mA						
VRB0512YMD-10WR3			12V/833mA						
VRB0515YMD-10WR3			15V/667mA						
VRB0524YMD-10WR3			24V/417mA						
VRB1205YMD-10WR3			5V/2000mA						
VRB2405YMD-10WR3			5V/2000mA						
VRB2412YMD-10WR3			12V/833mA						
VRB2415YMD-10WR3			15V/667mA						
VRB2424YMD-10WR3			24V/416mA						
VRB4803YMD-10WR3			3.3V/2400mA						
VRB4805YMD-10WR3			5V/2000mA						
VRB4812YMD-10WR3	12V/833mA								
VRB4815YMD-10WR3	15V/667mA								
VRB4824YMD-10WR3	24V/416mA								
VRA1205ZP-10WR3	10W	9-18 (12VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS				
VRA1212ZP-10WR3			±12V/±416mA						
VRA1215ZP-10WR3			±15V/±333mA						
VRB1203ZP-10WR3			3.3V/2400mA						
VRB1205ZP-10WR3			5V/2000mA						
VRB1212ZP-10WR3			12V/833mA						
VRB1224ZP-10WR3			24V/416mA						
VRA2405ZP-10WR3	10W	18-36 (24VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS				
VRA2412ZP-10WR3			±12V/±416mA						
VRA2415ZP-10WR3			±15V/±333mA						
VRB2403ZP-10WR3			3.3V/2400mA						
VRB2405ZP-10WR3			5V/2000mA						
VRB2412ZP-10WR3			12V/833mA						
VRB2415ZP-10WR3			15V/667mA						
VRB2424ZP-10WR3	24V/416mA								
VRA4805ZP-10WR3	10W	36-75 (48VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS				
VRA4812ZP-10WR3			±12V/±416mA						
VRA4815ZP-10WR3			±15V/±333mA						
VRB4803ZP-10WR3			3.3V/2400mA						
VRB4805ZP-10WR3			5V/2000mA						
VRB4812ZP-10WR3			12V/833mA						
VRB4815ZP-10WR3			15V/667mA						
VRB4824ZP-10WR3	24V/416mA								
VRB1203S-10WR3	10W	9-18 (12VDC)	3.3V/2400mA	1500VDC (SIP)	CE RoHS				
VRB1205S-10WR3			5V/2000mA						
VRB1209S-10WR3			9V/1111mA						
VRB1212S-10WR3			12V/833mA						
VRB1215S-10WR3			15V/667mA						
VRB1224S-10WR3			24V/417mA						
VRB2403S-10WR3			3.3V/2400mA						
VRB2405S-10WR3	5V/2000mA								
VRB2409S-10WR3	10W	18-36 (24VDC)	9V/1111mA	1500VDC (SIP)	CE RoHS				
VRB2412S-10WR3			12V/833mA						
VRB2415S-10WR3			15V/667mA						
VRB2424S-10WR3			24V/417mA						
URB2403S-10WR3*	10W	9-36 (24VDC)	3.3V/2400mA	1500VDC (SIP)	CE RoHS				
URB2405S-10WR3*			5V/2000mA						
URB2409S-10WR3*			9V/1111mA						
URB2412S-10WR3*			12V/833mA						
URB2415S-10WR3*			15V/667mA						
URB2424S-10WR3*			24V/417mA						

Product Program 2:1 Input series								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
VRA0505YMD-10WR3	10W	4.5-9 (5VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS			
VRA0512YMD-10WR3			±12V/±417mA					
VRA0515YMD-10WR3			±15V/±334mA					
VRA0524YMD-10WR3			±24V/±209mA					
VRB0512YMD-10WR3			12V/834mA					
VRB0515YMD-10WR3			15V/667mA					
VRB0524YMD-10WR3			24V/417mA					
VRB1205YMD-10WR3			5V/2000mA			18-36 (24VDC)	1500VDC (DIP)	RoHS
VRB2405YMD-10WR3			5V/2000mA					
VRB2412YMD-10WR3			12V/833mA					
VRB2415YMD-10WR3			15V/667mA					
VRB2424YMD-10WR3			24V/416mA					
VRB4803YMD-10WR3			3.3V/2400mA					
VRB4805YMD-10WR3			5V/2000mA					
VRB4812YMD-10WR3	12V/833mA	36-75 (48VDC)	1500VDC (DIP)	RoHS				
VRB4815YMD-10WR3	15V/667mA							
VRB4824YMD-10WR3	24V/416mA							
VRA1205ZP-10WR3	10W				9-18 (12VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS
VRA1212ZP-10WR3						±12V/±416mA		
VRA1215ZP-10WR3						±15V/±333mA		
VRB1203ZP-10WR3						3.3V/2400mA		
VRB1205ZP-10WR3		5V/2000mA						
VRB1212ZP-10WR3		12V/833mA						
VRB1224ZP-10WR3		24V/416mA						
VRA2405ZP-10WR3	10W	18-36 (24VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS			
VRA2412ZP-10WR3			±12V/±416mA					
VRA2415ZP-10WR3			±15V/±333mA					
VRB2403ZP-10WR3			3.3V/2400mA					
VRB2405ZP-10WR3			5V/2000mA					
VRB2412ZP-10WR3			12V/833mA					
VRB2415ZP-10WR3			15V/667mA					
VRB2424ZP-10WR3	24V/416mA							
VRA4805ZP-10WR3	10W	36-75 (48VDC)	±5V/±1000mA	1500VDC (DIP)	CE RoHS			
VRA4812ZP-10WR3			±12V/±416mA					
VRA4815ZP-10WR3			±15V/±333mA					
VRB4803ZP-10WR3			3.3V/2400mA					
VRB4805ZP-10WR3			5V/2000mA					
VRB4812ZP-10WR3			12V/833mA					
VRB4815ZP-10WR3			15V/667mA					
VRB4824ZP-10WR3	24V/416mA							


Note: 1. Chassis mounting and DIN-Rail mounting are available and please contact our sales department or refer to datasheet for details. Series have input reverse voltage protection.
 2. Series with suffix "LP" are 2 * 1 packaged with plastic casing, with suffix "YMD" are 1 * 1 packaged with aluminum alloy casing. And detailed dimension please refer to illustration.
 3. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.
 4. Products marked with * feature -40 to +105 operating temperature.

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Package Dimension

VRA/B_ZP-10WR3 & URA/B_ZP-10WR3 Series

LxWxH: 32.00x20.00x10.80(mm)

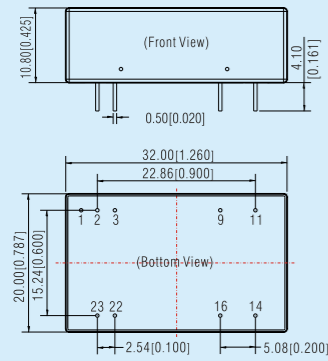


Pin-Out

Pin	Single	Dual
1	Ctrl	Ctrl
2,3	GND	GND
9	No Pin	OV
11	NC	-Vo
14	+Vo	+Vo
16	OV	OV
22,23	Vin	Vin

NC: No connection.

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$

VRB-S-10WR3, URB-S-10WR3 Series LxWxH: 22.00x9.50x12.00(mm)

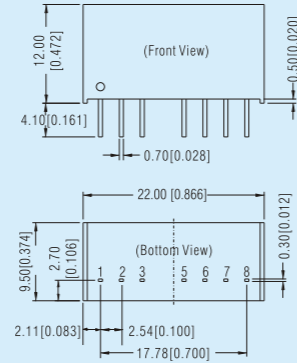

Pin-Out


Pin	Function
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	OV
8	NC

NC: No connection.

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$

URA/B_YMD-10WR3, VRB_YMD-10WR3 Series

LxWxH: 25.40x25.40x11.70(mm)




Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo
6	Ctrl	Ctrl

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$

URE/F_LP-10WR3 Series LxWxH: 51.50x26.50x12.00(mm)



Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo
6	Ctrl	Ctrl

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$

15W ultra-thin wide input voltage, isolated & regulated
SMD/DIP DC/DC converter

RoHS

Features

- 4:1 wide input voltage range
- Efficiency up to 89%
- Isolation: 1500VDC
- Operating temperature: -40°C to $+85^{\circ}\text{C}$
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- DIP/SMD packages optional



Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/ Current(Vo/Io)	Isolation (VDC)	Certification
URB2403J(M)/D/T-15W	15W	9-36(24VDC)	3.3V/4500mA	1500	RoHS
URB2405J(M)/D/T-15W		9-36(24VDC)	5V/3000mA		
URB2412J(M)/D/T-15W		9-36(24VDC)	12V/1250mA		
URB2415J(M)/D/T-15W		9-36(24VDC)	15V/1000mA		
URB4803J(M)/D/T-15W		18-75(24VDC)	3.3V/4500mA		
URB4805J(M)/D/T-15W		18-75(24VDC)	5V/3000mA		
URB4812J(M)/D/T-15W		18-75(24VDC)	12V/1250mA		
URB4815J(M)/D/T-15W		18-75(24VDC)	15V/1000mA		

Note

1. URBxxxxJ(M)/D/T-15W includes 4 types: VRB_JD-15W(DIP package without shell), URBxxxxJMD-15W(DIP package with shell), URBxxxxJT-15W(SMD package without shell) and URBxxxxJMT-15W(SMD package with shell)
2. Once input voltage exceeds the limit, it may cause irreversible damage
3. The above efficiency value is tested in the case of nominal input voltage and rated output load

Package Dimension

URB_JMD-15W (DIP package with shell) LxWxH: 39.10x29.50x6.80(mm)

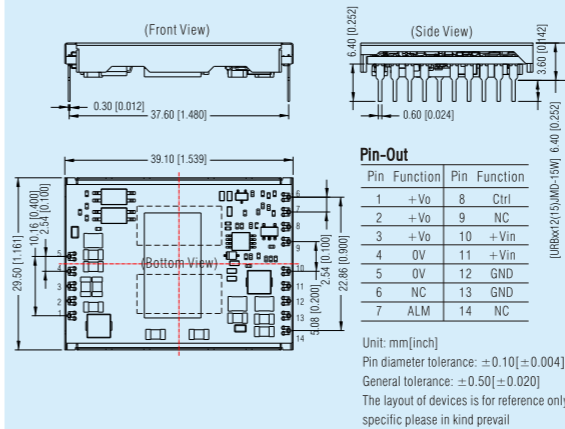


Pin-Out

Pin Function	Pin Function
1 +Vo	8 Ctrl
2 +Vo	9 NC
3 +Vo	10 +Vin
4 OV	11 +Vin
5 OV	12 GND
6 NC	13 GND
7 ALM	14 NC

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$
 The layout of devices is for reference only, specific please in kind prevail

URB_JD-15W (Open frame, DIP package) LxWxH: 38.70x27.20x6.20(mm)

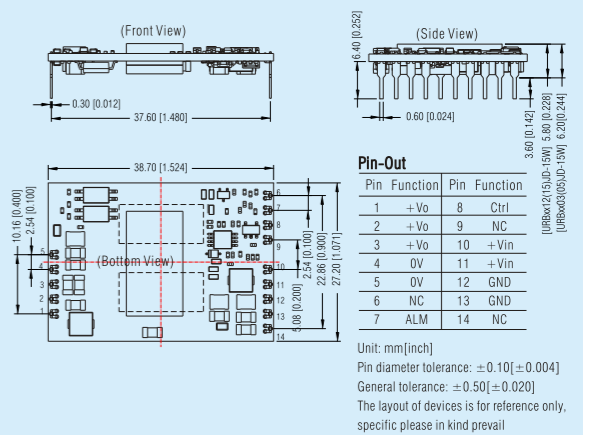


Pin-Out

Pin Function	Pin Function
1 +Vo	8 Ctrl
2 +Vo	9 NC
3 +Vo	10 +Vin
4 OV	11 +Vin
5 OV	12 GND
6 NC	13 GND
7 ALM	14 NC

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$
 The layout of devices is for reference only, specific please in kind prevail

URB_JMT-15W (SMD package with shell) LxWxH: 39.90x29.50x6.80(mm)

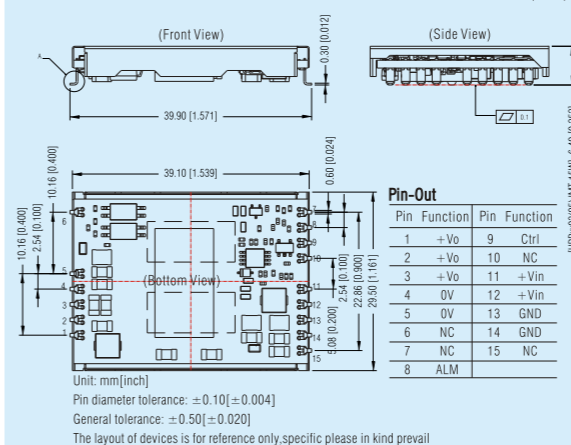


Pin-Out

Pin Function	Pin Function
1 +Vo	9 Ctrl
2 +Vo	10 NC
3 +Vo	11 +Vin
4 OV	12 +Vin
5 OV	13 GND
6 NC	14 GND
7 NC	15 NC
8 ALM	

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$
 The layout of devices is for reference only, specific please in kind prevail

URB_JT-15W (Open frame, SMD package) LxWxH: 39.90x27.20x6.20(mm)

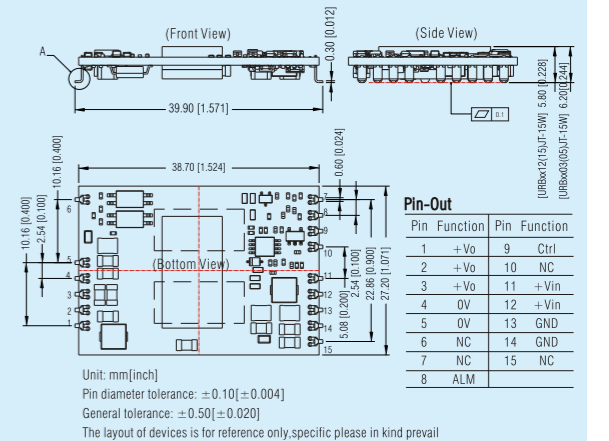

Pin-Out

Pin Function	Pin Function
1 +Vo	9 Ctrl
2 +Vo	10 NC
3 +Vo	11 +Vin
4 OV	12 +Vin
5 OV	13 GND
6 NC	14 GND
7 NC	15 NC
8 ALM	

Unit: mm[inch]
 Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
 General tolerance: $\pm 0.50[\pm 0.020]$
 The layout of devices is for reference only, specific please in kind prevail

15-20W 2:1/4:1 wide input voltage, isolated & regulated output series

UL **CE** **CB** **RoHS**

Features

- Suitable for DCS, battery-powered device, communication, distributed power system, D/A hybrid system, RTU and industrial robot system applications
- Operating temperature: -40°C to +85°C / -40°C to +105°C
- Standby power consumption as low as 0.15W
- International standard pin-out
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval



Product Program 4:1 Input series								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
URA2405LD-20WR3	20W	9-36 (24VDC)	±5V/±2000mA	1500VDC (DIP)				
URA2409LD-20WR3			±9V/±1111mA					
URA2412LD-20WR3			±12V/±834mA					
URA2415LD-20WR3			±15V/±667mA					
URB2403LD-20WR3			3.3V/5000mA					
URB2405LD-20WR3			5V/4000mA					
URB2409LD-20WR3			9V/2222mA					
URB2412LD-20WR3		12V/1667mA						
URB2415LD-20WR3		15V/1333mA						
URB2424LD-20WR3		24V/834mA						
URA4805LD-20WR3		20W	18-75 (48VDC)			±5V/±2000mA	1500VDC (DIP)	
URA4812LD-20WR3						±12V/±834mA		
URA4815LD-20WR3						±15V/±667mA		
URB4803LD-20WR3						3.3V/5000mA		
URB4805LD-20WR3	5V/4000mA							
URB4809LD-20WR3	9V/2222mA							
URB4812LD-20WR3	12V/1667mA							
URB4815LD-20WR3	15V/1333mA							
URB4824LD-20WR3	24V/834mA							
URF2403LP-20WR3	20W	9-36 (24VDC)	3.3V/5000mA	3000VDC (DIP)				
URF2405LP-20WR3			5V/4000mA					
URF2409LP-20WR3			9V/2222mA					
URF2412LP-20WR3			12V/1667mA					
URF2415LP-20WR3			15V/1334mA					
URF2424LP-20WR3			24V/833mA					
URF4803LP-20WR3			3.3V/5000mA					
URF4805LP-20WR3		5V/4000mA						
URF4812LP-20WR3		12V/1667mA						
URF4815LP-20WR3		15V/1334mA						
URF4824LP-20WR3		24V/833mA						
URA2405YMD-15WR3*		15W	9-36 (24VDC)			±5V/±1500mA	1500VDC (DIP)	
URA2412YMD-15WR3*						±12V/±625mA		
URA2415YMD-15WR3*						±15V/±500mA		
URA2424YMD-15WR3*	±24V/±312mA							
URA4805YMD-15WR3*	±5V/±1500mA							
URA4812YMD-15WR3*	±12V/±625mA							
URA4815YMD-15WR3*	±15V/±500mA							
URA4824YMD-15WR3*	±24V/±312mA							
URB2403YMD-15WR3*	15W		9-36 (24VDC)	3.3V/4000mA	1500VDC (DIP)			
URB2405YMD-15WR3*				5V/3000mA				
URB2412YMD-15WR3*				12V/1250mA				
URB2415YMD-15WR3*				15V/1000mA				
URB2424YMD-15WR3*				24V/625mA				
URB4803YMD-15WR3*				3.3V/4000mA				
URB4805YMD-15WR3*		5V/3000mA						
URB4812YMD-15WR3*	12V/1250mA							
URB4815YMD-15WR3*	15V/1000mA							
URB4824YMD-15WR3*	24V/625mA							

Product Program 4:1 Input series								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
URB2403YMD-20WR3*	20W	9-36 (24VDC)	3.3V/5000mA	1500VDC (DIP)				
URB2405YMD-20WR3*			5V/4000mA					
URB2412YMD-20WR3*			12V/1667mA					
URB2415YMD-20WR3*			15V/1334mA					
URB2424YMD-20WR3*			24V/833mA					
URB4803YMD-20WR3*			3.3V/5000mA					
URB4805YMD-20WR3*			5V/4000mA					
URB4812YMD-20WR3*		12V/1667mA						
URB4815YMD-20WR3*		15V/1334mA						
URB4824YMD-20WR3*		24V/833mA						
URA2405YMD-20WR3*		20W	18-75 (48VDC)			±5V/±2000mA	1500VDC (DIP)	
URA2412YMD-20WR3*						±12V/±833mA		
URA2415YMD-20WR3*						±15V/±667mA		
URA2424YMD-20WR3*						±24V/±417mA		
URA4805YMD-20WR3*	±5V/±2000mA							
URA4812YMD-20WR3*	±12V/±833mA							
URA4815YMD-20WR3*	±15V/±667mA							
URA4824YMD-20WR3*	±24V/±417mA							



Product Program 2:1 Input series								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
VRB2405LD-15WR3	15W	18-36 (24VDC)	5V/3000mA	1500VDC (DIP)				
VRB2412LD-15WR3			12V/1250mA					
VRB2415LD-15WR3			15V/1000mA					
VRB2424LD-15WR3			24V/625mA					
VRB4803LD-15WR3			3.3V/4000mA					
VRB4805LD-15WR3			5V/3000mA					
VRB4812LD-15WR3			12V/1250mA					
VRB4815LD-15WR3		15V/1000mA						
VRB4824LD-15WR3		24V/625mA						
VRA2405LD-20WR3		20W	9-18(12VDC)			±5V/±2000mA	1500VDC (DIP)	
VRA2409LD-20WR3						±9V/±1111mA		
VRA2412LD-20WR3						±12V/±834mA		
VRA2415LD-20WR3						±15V/±667mA		
VRA2424LD-20WR3						±24V/±417mA		
VRA4805LD-20WR3	±5V/±2000mA							
VRA4812LD-20WR3	±12V/±834mA							
VRA4815LD-20WR3	±15V/±667mA							
VRB2403LD-20WR3	20W	18-36 (24VDC)	3.3V/5000mA	1500VDC (DIP)				
VRB2405LD-20WR3			5V/4000mA					
VRB2409LD-20WR3			9V/2222mA					
VRB2412LD-20WR3			12V/1667mA					
VRB2415LD-20WR3			15V/1333mA					
VRB2424LD-20WR3			24V/834mA					
VRA4805LD-20WR3			±5V/±2000mA					
VRA4812LD-20WR3	±12V/±834mA							
VRA4815LD-20WR3	±15V/±667mA							
VRB4803LD-20WR3	20W	36-75 (48VDC)	3.3V/5000mA			1500VDC (DIP)		
VRB4805LD-20WR3			5V/4000mA					
VRB4809LD-20WR3			9V/2222mA					
VRB4812LD-20WR3			12V/1667mA					
VRB4815LD-20WR3			15V/1333mA					
VRB4824LD-20WR3			24V/834mA					

• This catalog is used to introduce our latest products, for more information, please contact our sales department



Product Program 2:1 Input series								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
VRB1203YMD-15WR3*	15W	9-18 (12VDC)	3.3V/4000mA	1500VDC (DIP)				
VRB1205YMD-15WR3*			5V/3000mA					
VRB1212YMD-15WR3*			12V/1250mA					
VRB1215YMD-15WR3*			15V/1000mA					
VRB1224YMD-15WR3*			24V/625mA					
VRB2403YMD-15WR3*			3.3V/4000mA					
VRB2405YMD-15WR3*			5V/3000mA					
VRB2412YMD-15WR3*		12V/1250mA						
VRB2415YMD-15WR3*		15V/1000mA						
VRB2424YMD-15WR3*		24V/625mA						
VRB4803YMD-15WR3*		20W	18-36 (24VDC)			3.3V/5000mA	1500VDC (DIP)	
VRB4805YMD-15WR3*						5V/4000mA		
VRB4812YMD-15WR3*						12V/1250mA		
VRB4815YMD-15WR3*						15V/1000mA		
VRB4824YMD-15WR3*	24V/833mA							
VRB2403YMD-20WR3*	3.3V/5000mA							
VRB2405YMD-20WR3*	5V/4000mA							
VRB2412YMD-20WR3*	12V/1667mA							
VRB2415YMD-20WR3*	15V/1333mA							
VRB2424YMD-20WR3*	24V/833mA							
VRB4803YMD-20WR3*	20W	36-75 (48VDC)	3.3V/5000mA	1500VDC (DIP)				
VRB4805YMD-20WR3*			5V/4000mA					
VRB4812YMD-20WR3*			12V/1667mA					
VRB4815YMD-20WR3*			15V/1333mA					
VRB4824YMD-20WR3*			24V/833mA					

1. Chassis mounting and DIN-Rail mounting are available and please contact our sales department or refer to datasheet for details. Series have input reverse voltage protection;
2. Series with suffix "LD" are 2*1 packaged with aluminum alloy casing, with suffix "LP" are 2*x1 packaged with plastic casing. And detailed dimension please refer to illustration;
3. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-802D, FI-803D and FT-BX1D are available. For more information, please contact our sales department.
4. Products marked with "*" feature -40°C to +105°C operating temperature

VRB-YMD-15WR3, URB-YMD-15WR3, VRB-YMD-20WR3, URB-YMD-20WR3 Series LxWxH: 25.40x25.40x11.70(mm)

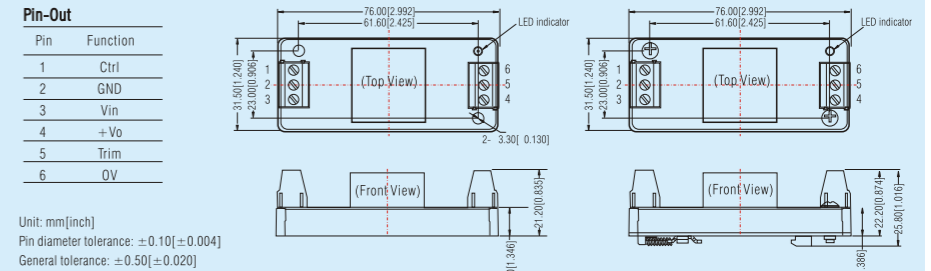


URA-YMD-15WR3, URA-YMD-20WR3 Series LxWxH: 25.40x25.40x11.70(mm)

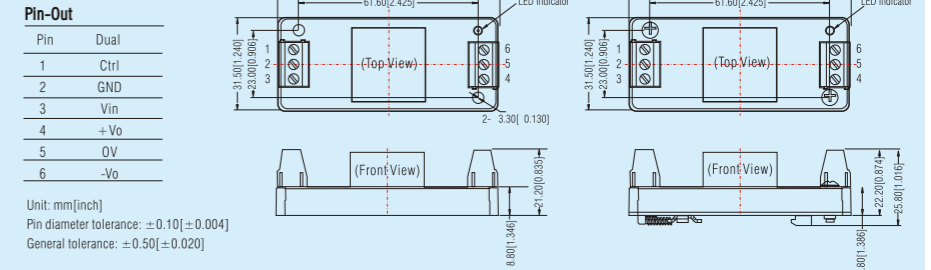

Package Dimension


VRB_LD-15WR3, VRA/B_LD-20WR3, URA/B_LD-20WR3 Series
LxWxH: 50.80x25.40x11.80(mm)

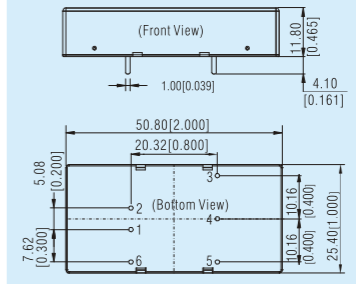

Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	Trim	OV
5	OV	-Vo
6	Ctrl	Ctrl

URF_LP-20WR3 Series LxWxH: 51.50x26.50x12.00(mm)

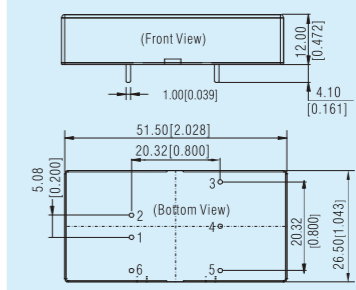

Pin-Out

Pin	Function
1	GND
2	Vin
3	+Vo
4	Trim
5	OV
6	Ctrl

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

30-50W 2:1/4:1 wide input voltage, 1500VDC isolated & regulated output series



Features

- Suitable for DCS, battery-powered device, communication, distributed power system, D/A hybrid system, RTU and industrial robot system applications
- Operating temperature: -40°C to +80°C
- Standby power consumption as low as 0.14W
- International standard pin-out
- Meet CISPR22/EN55032 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval



Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
VRB2403LD-30WR3	30W	18-36 (24VDC)	3.3V/6000mA	1500VDC (DIP)	CE RoHS
VRB2405LD-30WR3			5V/6000mA		
VRB2409LD-30WR3			9V/3333mA		
VRB2412LD-30WR3			12V/2500mA		
VRB2415LD-30WR3			15V/2000mA		
VRB2424LD-30WR3	30W	36-75 (48VDC)	24V/1250mA	1500VDC (DIP)	CE RoHS
VRB4803LD-30WR3			3.3V/6000mA		
VRB4805LD-30WR3			5V/6000mA		
VRB4812LD-30WR3			12V/2500mA		
VRB4815LD-30WR3			15V/2000mA		
VRB4824LD-30WR3	40W	18-36 (24VDC)	24V/1250mA	1500VDC (DIP)	CE RoHS
VRB2405LD-40WHR3			5V/8000mA		
VRB2412LD-40WHR3			12V/3333mA		
VRB2415LD-40WHR3			15V/2667mA		
VRB2424LD-40WHR3			24V/1667mA		
VRB4812LD-40WHR3	40W	36-75 (48VDC)	12V/3333mA	1500VDC (DIP)	CE RoHS
VRB4815LD-40WHR3			15V/2667mA		
VRB4824LD-40WHR3			24V/1667mA		

Product Program 4:1 Input series


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URA2405LD-30WR3	30W	9-36 (24VDC)	±5V/±3000mA	1500VDC (DIP)	CE RoHS
URA2412LD-30WR3			±12V/±1250mA		
URA2415LD-30WR3			±15V/±1000mA		
URA2424LD-30WR3			±24V/±625mA		
URB2403LD-30WR3			3.3V/6000mA		
URB2405LD-30WR3	30W	18-75 (48VDC)	5V/6000mA	1500VDC (DIP)	CE RoHS
URB2409LD-30WR3			9V/3333mA		
URB2412LD-30WR3			12V/2500mA		
URB2415LD-30WR3			15V/2000mA		
URB2424LD-30WR3			24V/1250mA		
URA4805LD-30WR3	30W	18-75 (48VDC)	±5V/±3000mA	1500VDC (DIP)	CE RoHS
URA4812LD-30WR3			±12V/±1250mA		
URA4815LD-30WR3			±15V/±1000mA		
URB4803LD-30WR3			3.3V/6000mA		
URB4805LD-30WR3			5V/6000mA		
URB4812LD-30WR3	30W	18-75 (48VDC)	12V/2500mA	1500VDC (YMD)	RoHS
URB4815LD-30WR3			15V/2000mA		
URB4824LD-30WR3			24V/1250mA		
URB4805YMD-30WR3			5V/6000mA		
URB4812YMD-30WR3			12V/2500mA		
URB4815YMD-30WR3	30W	18-75 (48VDC)	15V/2000mA	1500VDC (YMD)	RoHS
URB4824YMD-30WR3			24V/1250mA		

Note: 1. Chassis mounting and DIN-Rail mounting are available and please contact our sales department or refer to datasheet for details. Series have input reverse voltage protection;
 2. Series with suffix "LD" are 2*1 packaged with aluminum alloy casing, and detail dimension please refer to illustration;
 3. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

Package Dimension

VRB_LD-30WR3 URB_LD-30WR3 Series

LxWxH: 50.80x25.40x11.80(mm)




Pin-Out

Pin	Function
1	Vin
2	GND
3	Ctrl
4	Trim
5	OV
6	+Vo

Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

Package Dimension

URA_LD-30WR3 Series LxWxH: 50.80x25.40x11.80(mm)




Pin-Out

Pin	Function
1	Vin
2	GND
3	Ctrl
4	-Vo
5	OV
6	+Vo

Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

VRB_LD-40WHR3 Series LxWxH: 51.40x26.20x16.50(mm)




Pin-Out

Pin	Function
1	Vin
2	GND
3	Ctrl
4	Trim
5	OV
6	+Vo

Unit: mm[inch]
 General tolerance: ±0.50[±0.020]

URB_YMD-30WR3 Series LxWxH: 25.40x25.40x11.70(mm)



Pin-Out

Pin	Function
1	Ctrl
2	GND
3	Vin
4	+Vo
5	Trim
6	OV

Unit: mm[inch]
 Pin diameter tolerance: ±0.10[±0.004]
 General tolerance: ±0.50[±0.020]

75-200W 4:1 wide input voltage, 2250VDC isolated & regulated output series



Features

- 4:1 wide input voltage range
- Efficiency up to 94%
- Isolation: 2250VDC
- Input under-voltage, output over-voltage, over short-circuit, over-temperature and over-current protections
- Operating temperature: -40°C to +85°C
- Metal mask, international standard package




"H" Horizontal package with heat sink

Series	power	Input Voltage (VDC)	Output Voltage/current (Vo/Io)	Isolation voltage	Certification
URF4805QB-75WR3	75W	18-75(48VDC)	5V/15000mA	2250VDC	CE RoHS
URF4812QB-75WR3			12V/6250mA		
URF4815QB-75WR3			15V/5000mA		
URF4824QB-75WR3			24V/3125mA		
URF4848QB-75WR3			48V/1563mA		
URF2405QB-100WR3	100W	9-36(24VDC)	5V/20000mA	2250VDC	CE RoHS
URF2412QB-100WR3			12V/8300mA		
URF2415QB-100WR3			15V/6700mA		
URF2424QB-100WR3			24V/4200mA		
URF2428QB-100WR3			28V/3600mA		
URF2448QB-100WR3	48V/2100mA				
URF4805QB-100WR3	100W	18-75(48VDC)	5V/20000mA	2250VDC	CE RoHS
URF4812QB-100WR3			12V/8300mA		
URF4815QB-100WR3			15V/6700mA		
URF4824QB-100WR3			24V/4200mA		
URF4848QB-100WR3			48V/2100mA		
URF4805QB-150WR3	150W	18-75(48VDC)	5V/30000mA	2250VDC	CE RoHS
URF4812QB-150WR3			12V/12500mA		
URF4815QB-150WR3			15V/10000mA		
URF4824QB-150WR3			24V/6250mA		
URF4848QB-150WR3			48V/3130mA		
URF4805QB-200WR3	200W	18-75(48VDC)	5V/40000mA	2250VDC	CE RoHS
URF4812QB-200WR3			12V/16700mA		
URF4815QB-200WR3			15V/13300mA		
URF4824QB-200WR3			24V/8400mA		
URF4848QB-200WR3			48V/4200mA		


Note: 1. Use "F" suffix is for added aluminum baseplate and "H" suffix for heat sink mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;
2. Exceeding the maximum input voltage may cause permanent damage.

Package Dimension


With chassis LxWxH: 62.00x56x14.60(mm)

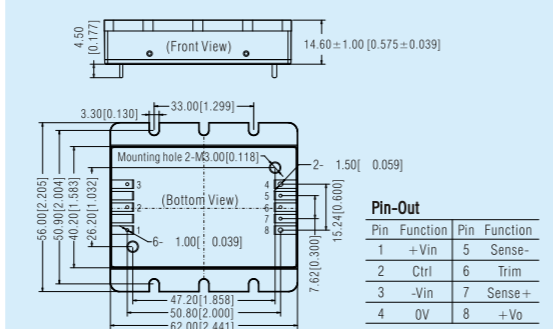

Without chassis and heat sink LxWxH: 61.80x40.20x12.70(mm)

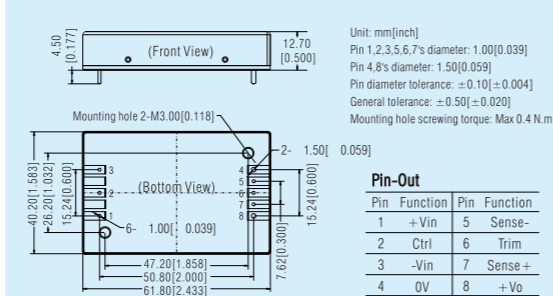

Packaged with heat sink LxWxH: 61.80x40.20x27.7 ± 1.00(mm)

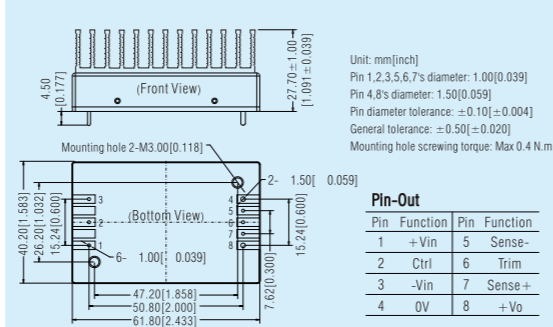

6-40W 4:1 wide input voltage, 2250VDC/3000VDC isolated & regulated output series for railway



Features

- Suitable for railway application
- Wide input voltage range: 40-160VDC
- Operating temperature: -40°C to +85°C
- Isolation: 2250VDC/ 3000VDC
- International standard package
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- Meet railway standard E50155



"H" Horizontal package with heat sink

A2S Chassis Mounting A4S DIN-Rail Mounting


Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
URA1D05YMD-6WR3	6W	40-160 (110VDC)	±5V/±600mA	2250VDC	RoHS
URA1D12YMD-6WR3			±12V/±250mA		
URA1D15YMD-6WR3			±15V/±200mA		
URB1D05YMD-6WR3			5V/1200mA		
URB1D12YMD-6WR3			12V/500mA		
URB1D15YMD-6WR3	15V/400mA	2250VDC	CE RoHS		
URB1D24YMD-6WR3	24V/250mA				
URA1D05(X)LMD-10WR3	±5V/±1000mA			2250VDC	CE RoHS
URA1D12(X)LMD-10WR3	±12V/±417mA				
URA1D15(X)LMD-10WR3	±15V/±334mA				
URB1D03LMD-10WR3	3.3V/2400mA				
URB1D05LMD-10WR3	5V/2000mA				
URB1D12LMD-10WR3	12V/833mA	2250VDC	CE RoHS		
URB1D15LMD-10WR3	15V/667mA				
URB1D24LMD-10WR3	24V/417mA				
URB1D03LMD-15WR3	3.3V/4000mA				
URB1D05LMD-15WR3	5V/3000mA				
URB1D12LMD-15WR3	12V/1250mA	2250VDC	CE RoHS		
URB1D15LMD-15WR3	15V/1000mA				
URB1D24LMD-15WR3	24V/625mA				
URB1D03LMD-20WR3	3.3V/5000mA				
URB1D05LMD-20WR3	5V/4000mA				
URB1D12LMD-20WR3	12V/1667mA	2250VDC	CE RoHS		
URB1D15LMD-20WR3	15V/1333mA				
URB1D24LMD-20WR3	24V/833mA				
URB1D03LD-20WR3	3.3V/5000mA				
URB1D05LD-20WR3	5V/4000mA				
URB1D12LD-20WR3	12V/1667mA	2250VDC	CE RoHS		
URB1D15LD-20WR3	15V/1333mA				
URB1D24LD-20WR3	24V/833mA				
URE1D12LD-20WR3	±12V/±833mA			3000VDC	RoHS
URE1D15LD-20WR3	±15V/±667mA				
URE1D24LD-20WR3	±24V/±417mA				
URF1D03LD-40WR3	3.3V/10000mA				
URF1D05LD-40WR3	5V/8000mA				
URF1D12LD-40WR3	12V/3333mA	3000VDC	CE RoHS		
URF1D15LD-40WR3	15V/2667mA				
URF1D24LD-40WR3	24V/1667mA				
URF1D48LD-40WR3	48V/833mA				


Note: 1. Use "H" suffix for heat sink mounting, "A2S" suffix for chassis mounting and "A4S" suffix for DIN-Rail mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;
2. Absolute maximum stress rating without damage (not recommended);
3. Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model 's' is decreased by 2% due to the input reverse polarity protection circuit.

Package Dimension


URA1D_YMD-6WR3、URB1D_YMD-6WR3 Series

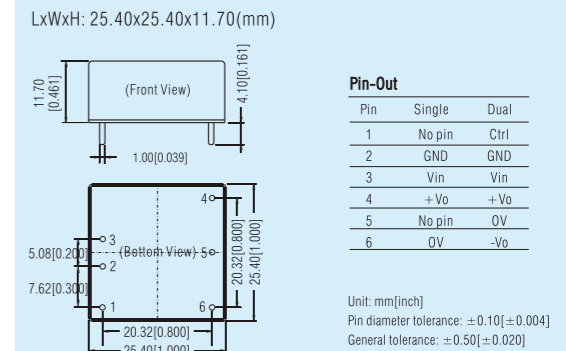

URE1D_LD-20WR3 Series LxWxH: 50.80x25.40x11.80(mm)

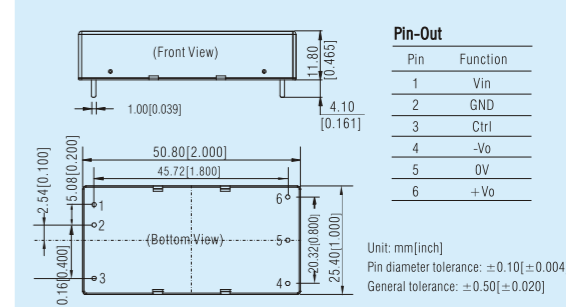


URB1D-LMD-15WR3、URB1D-LMD-20WR3、URA1D_(X)LMD-10WR3

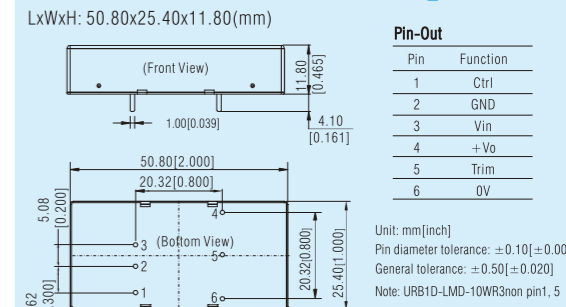

Package Dimension

URF1D_LD-40WR3、URB1D_LD-20WR3 Series

LxWxH: 50.80x25.40x11.80(mm)



Pin	Function
1	Ctrl
2	GND
3	Vin
4	+Vo
5	OV
6	Trim

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

50-250W wide input voltage, 3000VDC isolated & regulated output series for railway

RoHS

Features

- Suitable for railway application
- Wide input voltage range: 43-160VDC/40-160VDC
- Operating temperature: -40°C to +105°C
- Isolation: 3000VAC
- International standard brick package
- Input under-voltage, output over-voltage, over-current and short-circuit, over-temperature protections
- Meet railway standard EN50155



"H" Horizontal package with heat sink

Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current(Vo/Io)	Isolation	Certification
URF1D03QB-50WR3	50W	43-160 (110VDC)	3.3V/11364mA	3000VAC	RoHS
URF1D05QB-50WR3			5V/10000mA		
URF1D12QB-50WR3			12V/4167mA		
URF1D15QB-50WR3			15V/3333mA		
URF1D24QB-50WR3			24V/2083mA		
URF1D48QB-50WR3	48V/1041mA				
URF1D03QB-75WR3	75W	43-160 (110VDC)	3.3V/17045mA	3000VAC	RoHS
URF1D05QB-75WR3			5V/15000mA		
URF1D12QB-75WR3			12V/6250mA		
URF1D15QB-75WR3			15V/5000mA		
URF1D24QB-75WR3			24V/3125mA		
URF1D48QB-75WR3	48V/1563mA				
URF1D03QB-100WR3	100W	43-160 (110VDC)	3.3V/22727mA	3000VAC	RoHS
URF1D05QB-100WR3			5V/20000mA		
URF1D12QB-100WR3			12V/8333mA		
URF1D15QB-100WR3			15V/6667mA		
URF1D24QB-100WR3			24V/4167mA		
URF1D48QB-100WR3	48V/2083mA				
URF1D05HB-150WR3	150W	43-160 (110VDC)	5V/24000mA	3000VAC	RoHS
URF1D12HB-150WR3			12V/12500mA		
URF1D15HB-150WR3			15V/10000mA		
URF1D24HB-150WR3			24V/6250mA		
URF1D48HB-150WR3			48V/3120mA		

Note: Use "F" suffix is for added aluminum baseplate and "H" suffix for heat sink mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;

Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current(Vo/Io)	Isolation	Certification
URF1D05HB-250W(H)R3	250W	40-66	5V/40000mA	3000VAC	RoHS
URF1D12HB-250W(H)R3		66-160	5V/40000mA		
URF1D15HB-250W(H)R3	250W	40-66	12V/16670mA	3000VAC	RoHS
URF1D24HB-250W(H)R3		66-160	12V/20840mA		
URF1D48HB-250W(H)R3	250W	40-66	15V/13330mA	3000VAC	RoHS
URF1D54HB-250W(H)R3		66-160	15V/16670mA		
URF1D05HB-250W(H)R3	250W	40-66	24V/8330mA	3000VAC	RoHS
URF1D12HB-250W(H)R3		66-160	24V/10420mA		
URF1D15HB-250W(H)R3	250W	40-66	48V/4160mA	3000VAC	RoHS
URF1D24HB-250W(H)R3		66-160	48V/5200mA		
URF1D48HB-250W(H)R3	250W	40-66	54V/3700mA	3000VAC	RoHS
URF1D54HB-250W(H)R3		66-160	54V/4630mA		


• This catalog is used to introduce our latest products, for more information, please contact our sales department

Package Dimension

URF1DxxQB Series


Without heat sink LxWxH: 60.80x39.20x12.70(mm)

With heat sink LxWxH: 60.80x39.20x27.70(mm)



Pin	Function
1	+Vin
2	Ctrl
3	-Vin
4	OV
5	Sense-
6	Trim
7	Sense+
8	+Vo

Unit: mm[inch]
Pin 1,2,3,5,6,7's diameter: 1.00[0.039]
Pin 4,8's diameter: 1.50[0.059]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N.m

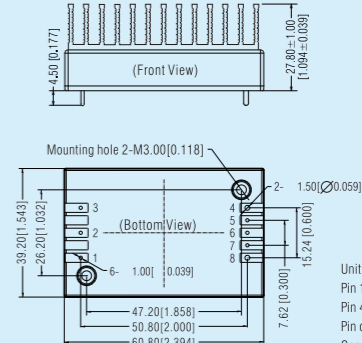


Pin	Function
1	+Vin
2	Ctrl
3	-Vin
4	OV
5	Sense-
6	Trim
7	Sense+
8	+Vo

Unit: mm[inch]
Pin 1,2,3,5,6,7's diameter: 1.00[0.039]
Pin 4,8's diameter: 1.50[0.059]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N.m

URF1D_HB-250WR3 Series


Without heat sink LxWxH: 61.00x57.90x13.80(mm)

With heat sink LxWxH: 62.00x58.00x30.80(mm)

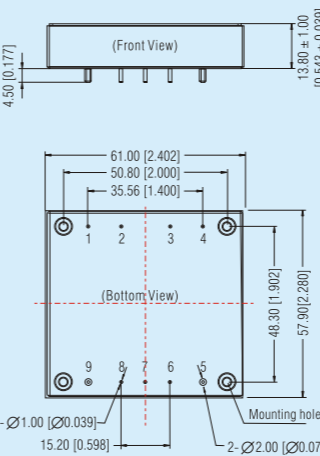

Pin	Function
1	+Vin
2	Ctrl
3	Case
4	-Vin
5	OV
6	Sense-
7	Trim
8	Sense+
9	+Vo


Unit: mm[inch]
Pin 1,2,3,4,6,7,8's diameter: 1.00[0.039]
Pin 5,9's diameter: 2.00[0.079]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N.m

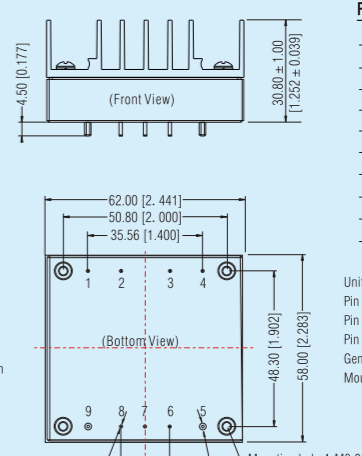

Pin	Function
1	+Vin
2	Ctrl
3	Case
4	-Vin
5	OV
6	Sense-
7	Trim
8	Sense+
9	+Vo


Unit: mm[inch]
Pin 1,2,3,4,6,7,8's diameter: 1.00[0.039]
Pin 5,9's diameter: 2.00[0.079]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N.m

URF1D_HB-150WR3 Series LxWxH: 61.00x57.90x13.80(mm)

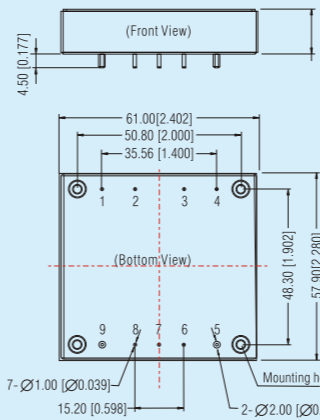

Pin	Function
1	+Vin
2	Ctrl
3	Case
4	-Vin
5	OV
6	Sense-
7	Trim
8	Sense+
9	+Vo

Unit: mm[inch]
Pin 1,2,3,4,6,7,8's diameter: 1.00[0.039]
Pin 5,9's diameter: 2.00[0.079]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N.m

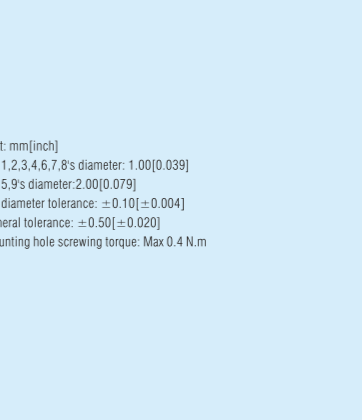

Pin	Function
1	+Vin
2	Ctrl
3	Case
4	-Vin
5	OV
6	Sense-
7	Trim
8	Sense+
9	+Vo

Unit: mm[inch]
Pin 1,2,3,4,6,7,8's diameter: 1.00[0.039]
Pin 5,9's diameter: 2.00[0.079]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]
Mounting hole screwing torque: Max 0.4 N.m

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

3-30W ultra-wide input, dual isolated & regulated output series

Features

- 4:1 wide input voltage range
- Dual isolated outputs
- Operating temperature: -40°C to +85°C
- Input under-voltage, over-current and short-circuit protections

RoHS

Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Isolation	Certification
URD480505S-3WR3	3W	18-75 (48VDC)	5V/300mA	5V/300mA	3000VDC	CE RoHS
URD480512S-3WR3			5V/300mA	12V/125mA		
URD480524S-3WR3			5V/300mA	24V/63mA		
URD480505YMD-10WR3	10W	18-75 (48VDC)	5V/1000mA	5V/1000mA	1500VDC	
URD480512YMD-10WR3			5V/1000mA	12V/417mA		
URD480524YMD-10WR3			5V/1000mA	24V/209mA		
URD480505LD-20WR3	20W	18-75 (48VDC)	5V/2000mA	5V/2000mA	3000VDC	
URD480512LD-20WR3			5V/2000mA	12V/833mA		
URD480524LD-20WR3			5V/2000mA	24V/417mA		
URD480524D-30WR3	30W		5V/4000mA	24V/417mA	3000VAC	




Note: 1. Absolute maximum rating without damage on the converter, but it isn't recommended;
2. Efficiency is measured in nominal input voltage and rated output load.

Package Dimension


URD-S-3WR3 Series LxWxH: 27.40x9.50x12.00(mm)

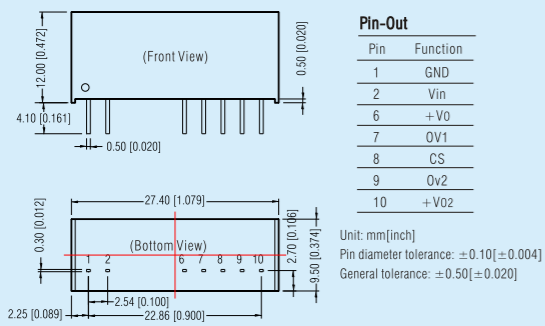


URD-YMD-10WR3 Series LxWxH: 25.40x25.40x11.70(mm)

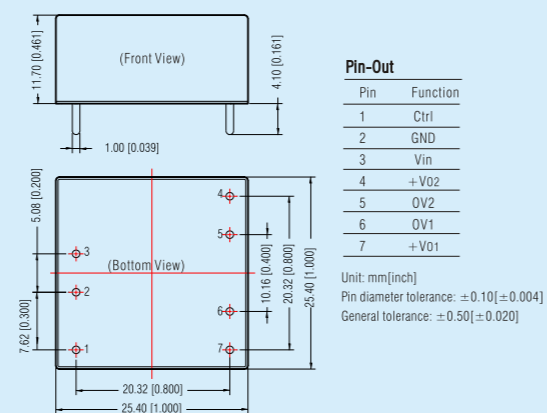


URD-LD-20WR3 Series LxWxH: 50.80x25.40x11.80(mm)

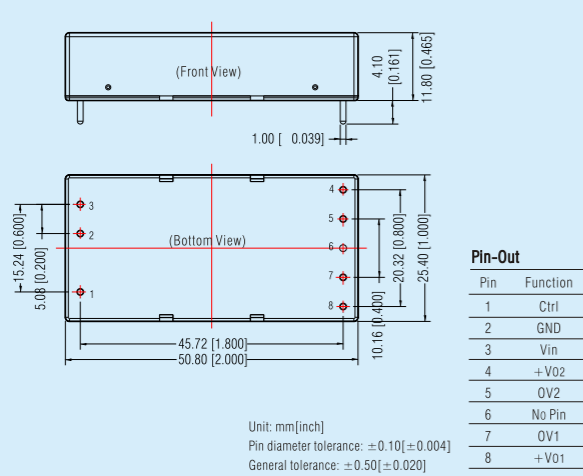

URD480524LD-30WR3 Series LxWxH: 70.00x48.00x26.00(mm)

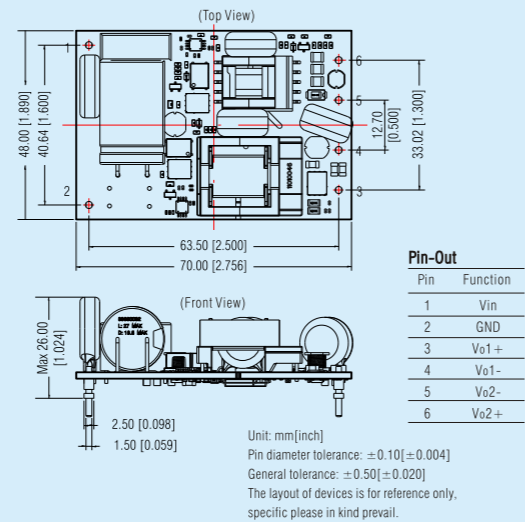

• This catalog is used to introduce our latest products, for more information, please contact our sales department



EMC Auxiliary Device

1. EMC filter..... 137
2. EMI filter..... 138
3. Pulse group suppressor..... 139
4. 485-AB Bus surge protection module..... 139
5. Common mode filter..... 140

EMC filter specialized for AC/DC converter

Features

- Greatly improve EMS performance of LD/LH/LH-ER2/LM30
- Enable EMI performance to meet requirements of CISPR22/EN 55022 Class B standard
- Input voltage range: 85-305VAC
- Operating temperature: -40°C to +85°C
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting

RoHS



A2S Chassis Mounting Package


A4S DIN-Rail Mounting Package

Product Program

Model Number	Input Voltage Range (VAC)	Nominal Current (A)(max)	Outstanding Features	Certification
FC-LX1D	85-305	1.5	Surge: $\pm 2KV/\pm 4KV$	RoHS
FC-LX1D2	85-305	1.5	Surge: $\pm 4KV/\pm 6KV$	
FC-L01DV1	85-305	0.3	Surge: $\pm 1KV/\pm 2KV$	

Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

PCB Mounting Package Dimension

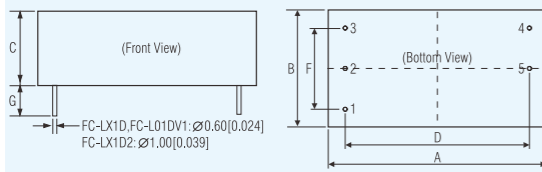

Outline & Dimensions

NO	FC-LX1D	FC-LX1D2	FC-L01DV1
A	33.70	53.80	33.70
B	22.20	28.80	22.20
C	18.00	19.00	18.00
D	28.00	45.72	28.00
F	15.24	20.32	15.24
G	6.00	6.00	6.00

Pin-Out

Pin	Function
1	$\text{IN}(N)$
2	$\text{IN}(N)$
3	$\text{IN}(L)$
4	$\text{OUT}(L)$
5	$\text{OUT}(N)$

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
Unmarked Tolerance: $\pm 0.50[\pm 0.020]$

EMC filter specialized for railway power supply

Features

- Improve EMI & EMS performance of 10-100W Railway power supply
- Enable the railway power supply to meet requirements of EN50155 standard
- Efficiency up to 98%
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Meet railway industry EN50155 standard
- Meet IEC/EN61000-4 series standard and CISPR22/EN55022
- Reverse voltage protection

RoHS



A2S Chassis Mounting Package


A4S DIN-Rail Mounting Package

Product Program

Model Number	Input Voltage Range (VDC)	Max. Output Power (W)	Outstanding Features	Certification
FC-C01D	40-160	10	Reverse voltage protection	RoHS
FC-CX1D	40-160	30		
FC-C03D	40-160	50	Input over-voltage protection	
FC-CX3D	66-160	100		

Note: 1. Used with DC/DC converter. 2. Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

PCB Mounting Package Dimension

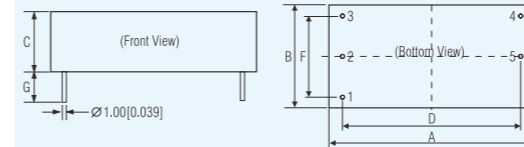

Outline & Dimensions

No	FC-C01D	FC-CX1D	FC-C03D	FC-CX3D
A	50.80	53.80	53.80	53.80
B	25.40	28.80	28.80	28.80
C	15.16	19.00	19.00	23.50
D	45.72	45.72	45.72	45.72
F	20.32	20.32	20.32	20.32
G	6.00	6.00	6.00	6.00

Pin-Out

Pin	Function
1	$\text{IN}(N)$
2	$\text{IN}(N)$
3	$\text{IN}(L)$
4	+Vo
5	-Vo

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10[\pm 0.004]$ General tolerance: $\pm 0.25[\pm 0.010]$ Unmarked Tolerance: $\pm 0.50[\pm 0.020]$

EMC filter specialized for DC/DC converter

Features

- Greatly improve EMS & EMI performance of 2:1/4:1 wide input voltage DC/DC converter
- Operating temperature: -40°C to +85°C
- Compact size, cost-effective
- Slow start-up function
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Meet IEC/EN61000-4 series standard and CISPR22/EN55032
- Reverse voltage protection

RoHS



A2S Chassis Mounting Package


A4S DIN-Rail Mounting Package

Product Program

Model Number	Input Voltage Range (VDC)	Max. Output Power(W)/Nominal Current(A)	Outstanding Features	Certification
FC-AX3D	10-36	30W	Reverse voltage protection and slow start-up function	RoHS
FC-B02D	18-75	30W		
FC-D03D	18-36	50W		
FC-E03D	36-75	75W	Small volume	
FC-A01D	9-36	1A		
FC-B01D	18-75	1A		

Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

PCB Mounting Package Dimension

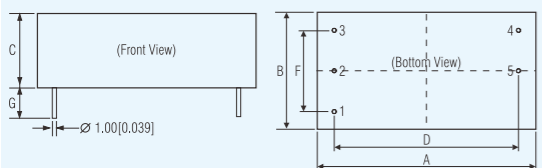

Outline & Dimensions

No	FC-AX3D	FC-B02D	FC-D03D	FC-E03D	FC-A01D	FC-B01D
A	53.80	53.80	53.80	53.80	37.00	37.00
B	28.80	28.80	28.80	28.80	23.00	23.00
C	19.00	19.00	19.00	19.00	15.00	15.00
D	45.72	45.72	45.72	45.72	30.48	30.48
F	20.32	20.32	20.32	20.32	17.78	17.78
G	6.00	6.00	6.00	6.00	4.10	4.10

Pin-Out

Pin	Function
1	$\text{IN}(N)$
2	-Vin
3	+Vin
4	+Vo
5	-Vo

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.50[\pm 0.020]$

EMI filter specialized for DC/DC converter

Features

- Improve EMI performance of 0-80V wide input voltage DC/DC converter with under 3A input current
- Enable MORN SUN DC/DC converter to meet requirements of EN 55022 Class B standard
- Attenuation rate up to 20dB
- Low temperature rise
- Restrain the EMI with DC input circuit
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting

RoHS



A2S Chassis Mounting Package


A4S DIN-Rail Mounting Package

Product Program

Model Number	Input Voltage Range (VDC)	Nominal Current (A)(max)	Outstanding Features	Certification
FL-B03D	0-80	3	Meet EMI requirements of Class B standard	RoHS

Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

Package Dimension LxWxH: 25.40x25.40x11.70(mm)

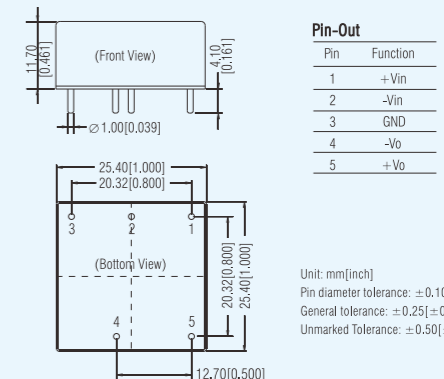

Pin-Out

Pin	Function
1	+Vin
2	-Vin
3	GND
4	-Vo
5	+Vo

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
General tolerance: $\pm 0.25[\pm 0.010]$
Unmarked Tolerance: $\pm 0.50[\pm 0.020]$

Pulse group suppressor specialized for DC/DC converter

RoHS


Features

- Improve pulse group suppressor performance of 0-80V wide input DC/DC converter
- Enable MORNSUN DC/DC converter to meet $\pm 4KV$ requirements of IEC/EN61000-4-4
- Attenuation rate up to 30dB
- Low temperature rise
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Designed to suppress the DC power interference



Package Dimension

LxWxH: 33.70x22.20x18.00(mm)

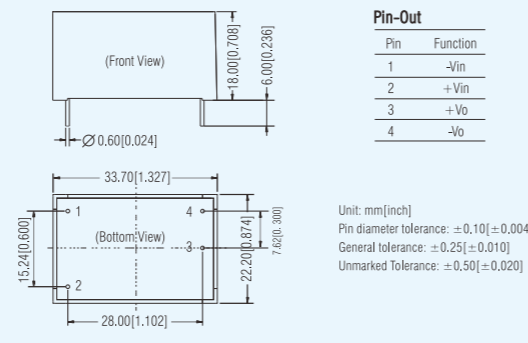

Pin	Function
1	-Vin
2	+Vin
3	+Vo
4	-Vo

Product Program

Model Number	Input Voltage Range (VDC)	Nominal Current (A)(max)	Outstanding Features	Certification
FT-AX1D	0-40	1.5	meet $\pm 4KV$ requirements of pulse group suppressor	RoHS
FT-BX1D	0-80	1.5	meet $\pm 4KV$ requirements of pulse group suppressor	

Note: Series with suffix"A2S" are chassis mounting, with suffix"A4S" are DIN-Rail mounting.

485-AB bus surge protection module

RoHS

Features

- Suppress signal port lightning surge
- Impact anti - current: $\leq 1KA$ (8/20 μs simulated lightning waveforms)
- Compact size, cost-effective
- Meet $\pm 2KV/\pm 4KV$ surge level of IEC/EN61000-4-5




Product Program

Model Number	Operating Voltage (VDC)	Clamping Voltage (VDC)	Nominal Current (A)	Data Rate (max)	Certification
FS-TD01D	0-5	15	≤ 0.1	115.2kbps	RoHS


Notes:

1. Enable 485 modules to meet surge level of IEC/EN61000-4-5 $\pm 2KV$ (2 internal resistance)/ $\pm 4KV$ (12 internal resistance).
2. Customization is acceptable.

Typical application

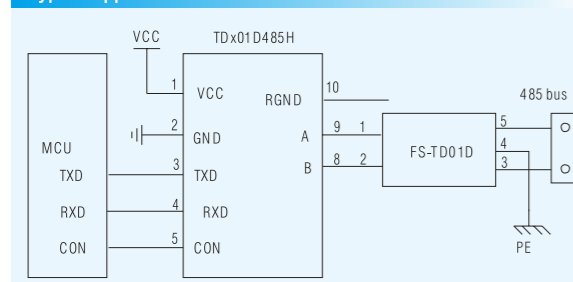

Package Dimension

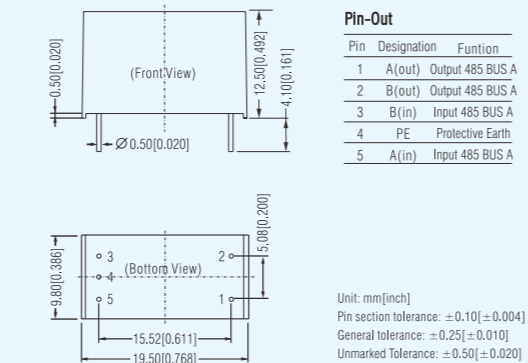

Pin	Designation	Function
1	A(out)	Output 485 BUS A
2	B(out)	Output 485 BUS A
3	B(in)	Input 485 BUS A
4	PE	Protective Earth
5	A(in)	Input 485 BUS A

Common mode filter

RoHS

Features

- Low temperature rise
- Compact size



Product Program

Model Number	Inductance (μH)	Nominal Current (A)	DCR (m Ω)	Weight (g)	Certification
FL2D-Z5-103	10000*2	0.5	500*2	4.5	RoHS
FL2D-Z5-153	15000*2	0.5	600*2	4.5	
FL2D-Z5-223	22000*2	1	650*2	4.5	
FL2D-10-102	1000*2	1	50*2	4.5	
FL2D-10-222	2200*2	1	60*2	4.5	
FL2D-10-332	3300*2	1	80*2	4.5	
FL2D-10-472	4700*2	1	140*2	4.5	
FL2D-10-682*	6800*2	1	160*2	6.5	
FL2D-10-822*	8200*2	1	180*2	6.5	
FL2D-30-102	1000*2	3	40*2	4.5	
FL2D-30-222	2200*2	3	42*2	4.5	
FL2D-30-472	4700*2	3	70*2	4.5	

Note: Dimension of model number marked with * please refer to Figure 2.

Package Dimension

Figure 1:


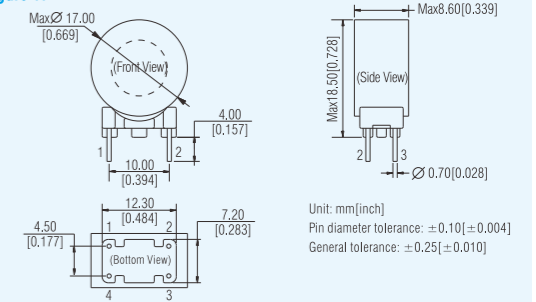


Figure 2:



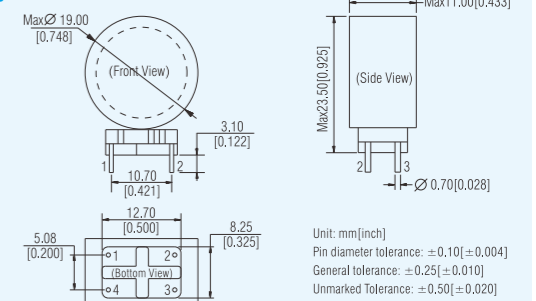

1. Industrial bus isolation transceiver module	142-149
Compact SMD CAN/RS485/RS232 isolated transceiver module	142
RS485 isolated transceiver.....	144
CAN isolated transceiver module.....	146
Integrated isolated 485/CAN AC/DC converter.....	148
Single/Dual isolated RS232 transceiver (high-speed)	149
2. Signal conditioning module	150-157
3. DC/DC converter for IGBT driver/IGBT driver	158-161
4. LED driver	162-163
5. Isolation transmitter	164-166
6. IC	167-174
7. Transformer	175-182

Automotive CAN isolated transceiver module



Features

- Meet AEC-Q100 standard
- Manufacturing process meets IATF16949 standard
- Operating temperature: -40°C to +105°C
- Set isolation and ESD bus protection in one
- Isolation: 2.5kVDC (input and output are mutually isolated)
- Baud rate: 1Mbps
- Meet EN62368 standard (pending)
- Connect up to 110 nodes on one bus
- Compact size SMD Package: LxWxH=17.00x12.14x9.45(mm)




Product Program

Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
CTD331SCANH	3.15-3.45	40K-1Mbps	110	High-rate	RoHS
CTD531SCANH	4.75-5.25	40K-1Mbps	110	High-rate	CE

Package Dimension

CTD5(3)31SCANH Series: LxWxH: 17.00x12.14x9.45(mm)

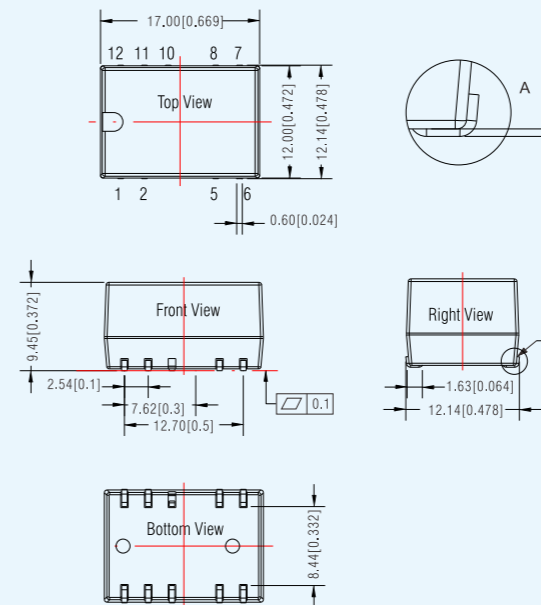

Pin-Out		
Pin	Name	Function
1	VCC	Input Power +
2	GND	GND
5	CANL	CANL Pin
6	CANH	CANH Pin
7	CANG	Isolation Power Output Ground
8	NC	No Function
10	NC	No Function
11	RXD	Receiving Pin
12	TXD	Sending Pin

NC: Notavailable for electrical connection

Unit: mm[inch]
Pin section tolerances: ±0.10 [±0.004]
General tolerances: ±0.25 [±0.010]




Compact SMD CAN/RS485/RS232 isolated transceiver module CE RoHS

Features

- Operating temperature: -40°C to +85°C (RS485/RS232)
-40°C to +105°C (CAN)
- Isolation: 2500VDC
- Two-terminal isolation (input and output are mutually isolated)
- Baud rate up to 5Mbps
- Isolated voltage output (RS485)
- ESD protection: IEC/EN61000-4-2 Contact ±4KV perf. Criteria B
- Compact size, SMD package

Product Program					
Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD331S485	3.15-3.45	19.2kbps	64	SMD Low-rate	RoHS CE
TD531S485	4.75-5.25	19.2kbps	64	SMD Low-rate	
TD331S485H	3.15-3.45	150kbps	128	SMD High-rate	
TD531S485H	4.75-5.25	150kbps	128	SMD High-rate	
TD331S485H-A	3.15-3.45	150kbps	128	SMD High-rate,	
TD531S485H-A	4.75-5.25	150kbps	128	Auto-switch	RoHS CE
TD331S485H-E	3.15-3.45	500kbps	256	SMD High-rate,	
TD531S485H-E	4.75-5.25	500kbps	256	256 nodes	
TD331SCANH	3.15-3.45	40K-1Mbps	110	SMD High-rate	
TD531SCANH	4.75-5.25	40K-1Mbps	110	SMD High-rate	
TD331SCANFD	3.15-3.45	40K-5Mbps	110	SMD CANFD	RoHS CE
TD531SCANFD	4.75-5.25	40K-5Mbps	110	SMD CANFD	
TD331S485-L	3.15-3.45	19.2kbps	16	Low power consumption	
TD531S485-L	4.75-5.25	19.2kbps	16	Low power consumption	


Product Program					
Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD331S232H	3.15-3.45	0-115.2kbps	1	SMD High-rate	RoHS CE
TD531S232H	4.75-5.25	0-115.2kbps	1	SMD High-rate	

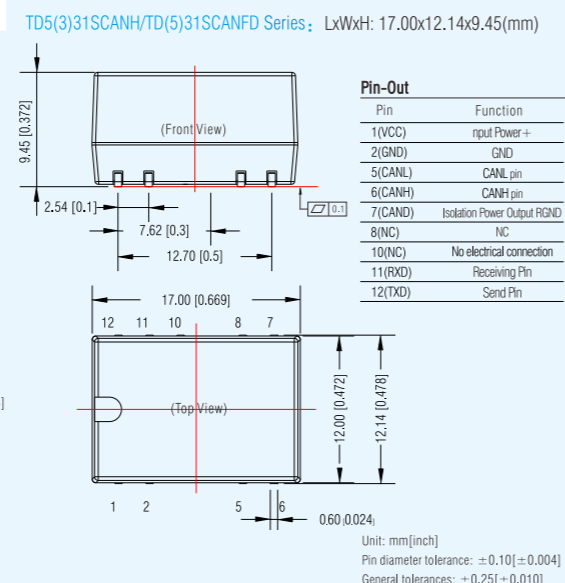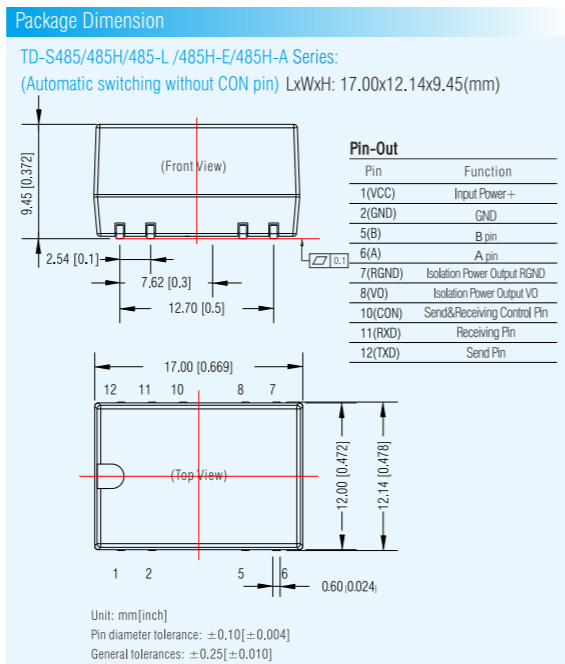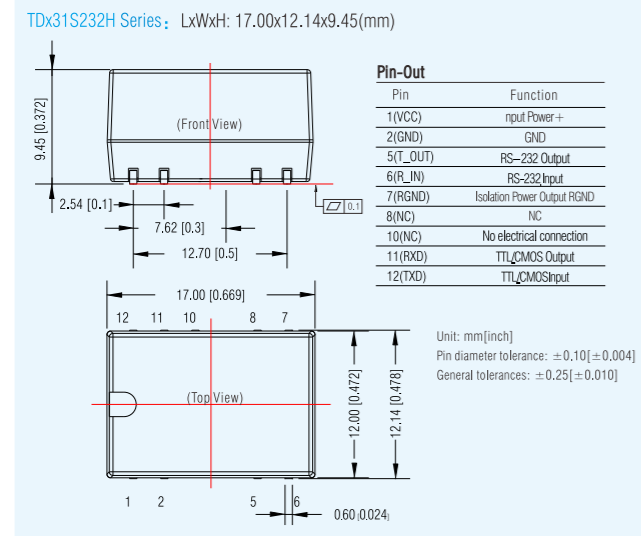



RS485 isolated transceiver CE RoHS

Features

- Operating temperature: -40°C to +85°C
- Isolation: 2500VDC/3000VDC/3750VAC
- Two-terminal isolation (input and output are mutually isolated), built-in isolated power supply bus protection
- TD3xxD485xx compatible with the UART port of +3.3V
TD5xxD485xx compatible with the UART port of +5V
- Isolated voltage output
- ESD protection: IEC/EN61000-4-2 Contact ±4KV perf. Criteria B
- Compact size, DIP/SMD package

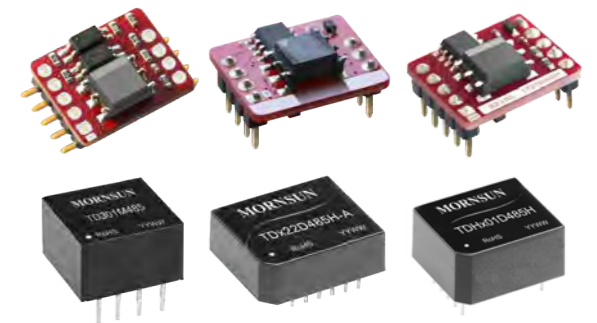


Product Program					
Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD321D485	3.15-3.45	19.2kbps	64	Universal	RoHS CE
TD521D485	4.75-5.25	19.2kbps	64	Universal	
TD321D485H	3.15-3.45	200kbps	64	High-rate	RoHS CE
TD521D485H	4.75-5.25	200kbps	64	High-rate	
TD321D485H-A	3.15-3.45	500kbps	128	High-rate	RoHS CE
TD521D485H-A	4.75-5.25	500kbps	128	Auto-switch	
TD321D485H-E	3.15-3.45	500kbps	256	High-rate	RoHS CE
TD521D485H-E	4.75-5.25	500kbps	256	256 nodes	
TD322D485H-A	3.15-3.45	120kbps	32	Dual channel isolated type	RoHS CE
TD522D485H-A	4.75-5.25	120kbps	32	Dual channel isolated type	
TD321S485	3.15-3.45	19.2kbps	64	SMD Low-rate	RoHS CE
TD521S485	4.75-5.25	19.2kbps	64	SMD Low-rate	
TD321S485H	3.15-3.45	200kbps	64	SMD High-rate	
TD521S485H	4.75-5.25	200kbps	64	SMD High-rate	
TD321S485H-A	3.15-3.45	500kbps	128	SMD Auto-switch module	
TD521S485H-A	4.75-5.25	500kbps	128	SMD Auto-switch module	RoHS CE
TD321S485H-E	3.15-3.45	500kbps	256	SMD High-rate(Enhanced)	
TD521S485H-E	4.75-5.25	500kbps	256	SMD High-rate(Enhanced)	
TD301M485	3.15-3.45	500kbps	64	Compact Size	
TD501M485	4.75-5.25	500kbps	64	Compact Size	
TDH301D485H	3.15-3.45	115.2kbps	32	High isolation 485	RoHS CE
TDH501D485H	4.75-5.25	115.2kbps	32	High isolation 485	
TD321D485-L	3.15-3.45	19.2kbps	16	Low power consumption	RoHS CE
TD521D485-L	4.75-5.25	19.2kbps	16	Low power consumption	

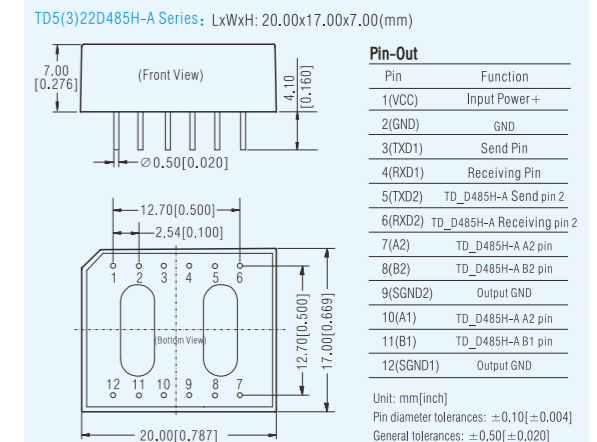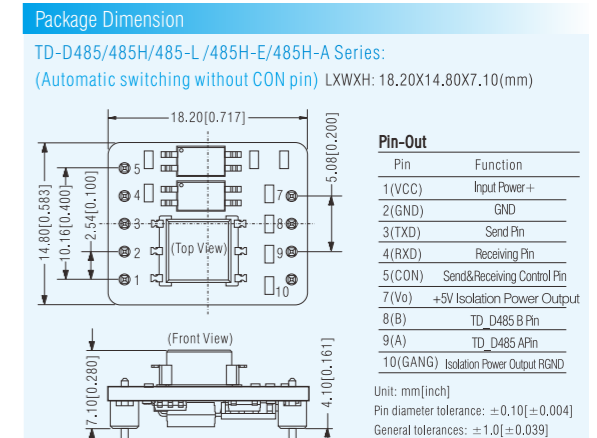

Package Dimension

TD-S485/485H/485H-E/485H-A(Automatic switching without CON pin) Series: LXWXH: 18.20X14.80X7.20(mm)

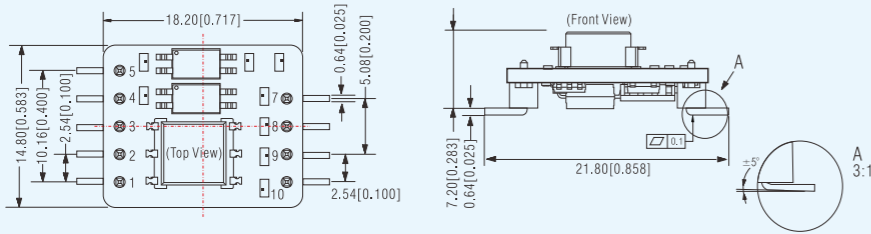


Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	Send Pin
4(RXD)	Receiving Pin
5(CON)	Send&Receiving Control Pin
7(Vo)	+5V Isolation Power Output
8(B)	TD_D485 B Pin
9(A)	TD_D485 A Pin
10(GANG)	Isolation Power Output RGND

Unit: mm[inch]
 Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 1.0[\pm 0.039]$

T5(3)01M485 Series: LxWxH: 12.70x10.16x7.70(mm)

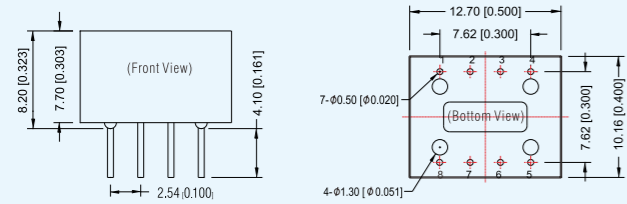


Pin-Out

Pin	Function
1(RXD)	Receiving Pin
2(TXD)	Send Pin
3(GND)	GND
4(VCC)	Input Power+
5(RGND)	Isolation Power Output RGND
6(A)	A Pin
7(B)	B Pin
8(VO)	Isolation Power Output VO

Unit: mm[inch]
 Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.25[\pm 0.010]$

TDHx01D485H Series: LxWxH: 20.00x17.00x12.80(mm)

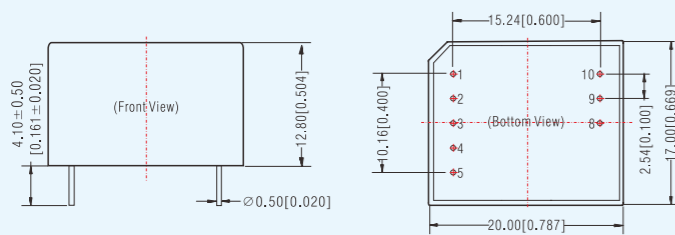

Pin-Out


Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	TD_D485H Send Pin
4(RXD)	TD_D485H Receiving Pin
5(CON)	Send&Receiving Control Pin
8(B)	TD_D485H B Pin
9(A)	TD_D485H A Pin
10(RGND)	Isolation Power Output RGND

Unit: mm[inch]
 Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.25[\pm 0.010]$

CAN isolated transceiver module

Features

- Operating temperature: -40°C to $+105^{\circ}\text{C}$
- Isolation: 3000VDC/10KVDC(high-rate high isolation)
2500VDC(compact size or high surge protective type)
10000VDC(high-rate high isolation type)
- Two-terminal isolation (input and output are mutually isolated), built-in isolated power supply bus protection
- TD3xxDCANxx compatible with the CAN control port of +3.3V
TD5xxDCANxx compatible with the CAN control port of +5V
- ESD protection: IEC/EN61000-4-2 Contact $\pm 4\text{KV}$ perf. Criteria B
- Baud rate up to 5Mbps
- Meet ISO11898-2, ISO11898-5 Standards
- Connect up to 110 nodes on one bus
- Compact size, DIP/SMD package

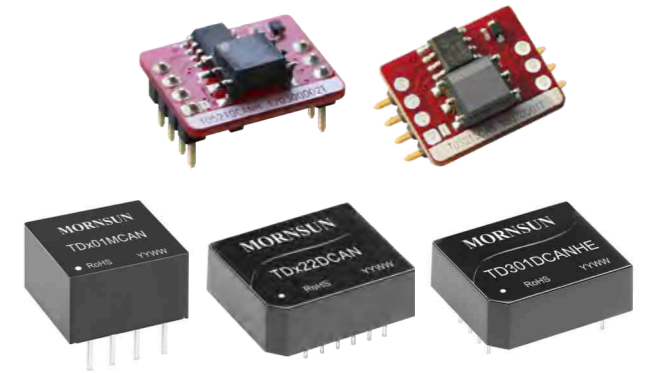


Product Program

Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD321DCAN	3.15-3.45	5k-1Mbps	110	Universal	RoHS, CE
TD521DCAN	4.75-5.25	5k-1Mbps	110	Universal	RoHS, CE
TD321DCANH	3.15-3.45	40k-1Mbps	110	High-rate	
TD521DCANH	4.75-5.25	40k-1Mbps	110	High-rate	
TD321SCAN	3.15-3.45	5k-1Mbps	110	Universal SMD	
TD521SCAN	4.75-5.25	5k-1Mbps	110	Universal SMD	
TD321SCANH	3.15-3.45	40k-1Mbps	110	SMD High-rate	
TD521SCANH	4.75-5.25	40k-1Mbps	110	SMD High-rate	
TD322DCAN	3.15-3.45	40k-1Mbps	110	Dual channel isolated type	
TD522DCAN	4.75-5.25	40k-1Mbps	110	Dual channel isolated type	
TD301MCAN	3.15-3.45	40k-1Mbps	110	Compact Size	
TD501MCAN	4.75-5.25	40k-1Mbps	110	Compact Size	
TD301MCANFD	3.15-3.45	40k-5Mbps	110	Compact Size	
TD501MCANFD	4.75-5.25	40k-5Mbps	110	Compact Size	
TD301DCANHE	3.15-3.45	20k-1Mbps	110	High Surge Protective Type	RoHS, CE
TD501DCANHE	4.75-5.25	20k-1Mbps	110	High Surge Protective Type	

Package Dimension

TD5(3)21DCANx Series: LxWxH: 18.20x14.80x7.10(mm)

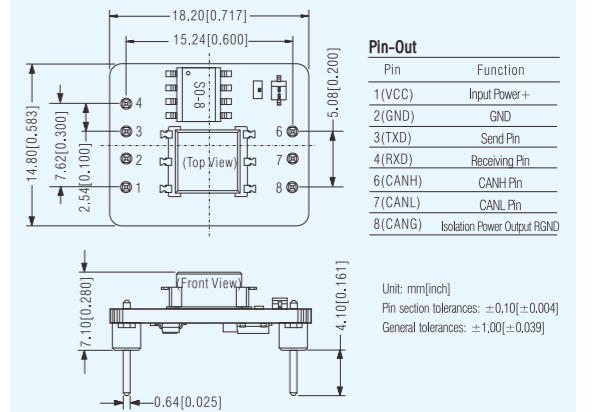


Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	Send Pin
4(RXD)	Receiving Pin
6(CANH)	CANH Pin
7(CANL)	CANL Pin
8(CANG)	Isolation Power Output RGND

Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 1.00[\pm 0.039]$

TD5(3)22DCAN Series: LXWXH: 20.00X17.00X7.00(mm)

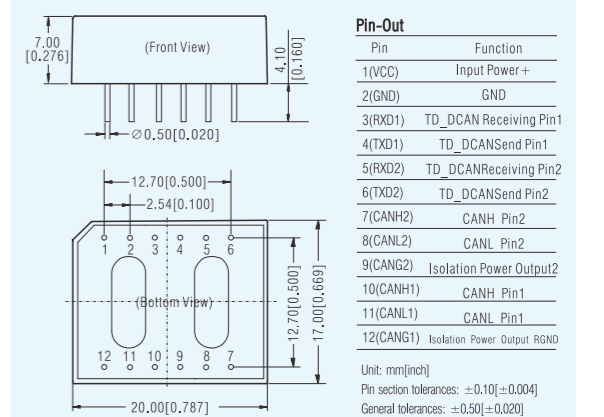


Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(RXD1)	TD_DCANSend Pin1
4(TXD1)	TD_DCANSend Pin2
5(RXD2)	TD_DCANSend Pin2
6(TXD2)	TD_DCANSend Pin2
7(CANH2)	CANH Pin2
8(CANL2)	CANL Pin2
9(CANG2)	Isolation Power Output2
10(CANH1)	CANH Pin1
11(CANL1)	CANL Pin1
12(CANG1)	Isolation Power Output RGND

Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.50[\pm 0.020]$

Package Dimension

TD5(3)01DCANHE Series LXWXH: 20.00X17.00X7.00(mm)

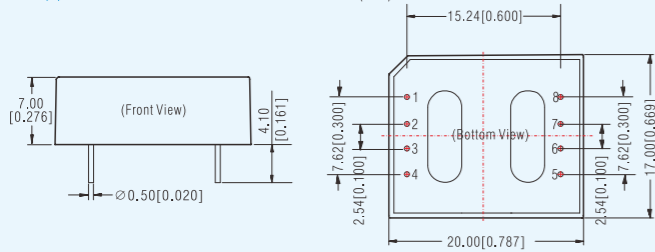


Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	TD_DCAN Send Pin
4(RXD)	TD_DCAN Receiving Pin
5(PE)	GND
6(CANH)	TD_DCAN H Pin
7(CANL)	TD_DCAN L Pin
8(CANG)	Isolation Power Output CANG

Unit: mm[inch]
 Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.25[\pm 0.010]$

TD5(3)01MCAN(FD) Series LXWXH: 12.70x10.16x7.70(mm)

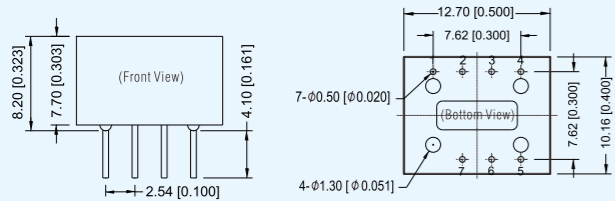


Pin-Out

Pin	Function
1(RXD)	Receiving Pin
2(TXD)	Send Pin
3(GND)	GND
4(VCC)	Input Power+
5(CANG)	Isolation Power Output CANG
6(CANL)	CANL Pin
7(CANH)	CANH Pin

Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.25[\pm 0.010]$

TD5(3)21SCANx Series LXWXH: 18.20X14.80X7.20(mm)

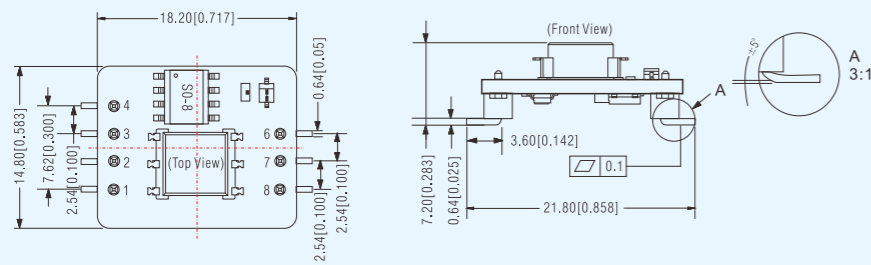

Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	Send Pin
4(RXD)	Receiving Pin
6(CANH)	CANH Pin
7(CANL)	CANL Pin
8(CANG)	Isolation Power Output RGND

Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 1.00[\pm 0.039]$

Integrated isolated 485/CAN AC/DC converter

CE RoHS

Features

- Wide input voltage range: 85 - 305VAC/100 - 430VDC
- AC and DC dual-use (input from the same terminal)
- Isolation: 4000VAC
- Output short-circuit, over-current protections
- Baud rate up to 1Mbps
- Connect up to 128(485)/110(CAN) nodes on one bus
- Open frame, compact size, high power density
- Flexible peripheral circuit design to get customers rid of layout problem




Product Program

Model Number	Power	Rated output voltage (V)	Rated output current I _o (mA)	Effi (%) (typ)	Baud Rate (kbps)	Nodes	Certification
TLA03-03K485		3.3V/5V	500/25	55		128	CE RoHS
TLA05-03K485	3W	5V/5V	500/25	68	500	128	RoHS
TLA12-03K485		12V/5V	500/25	70		128	CE RoHS
TLA03-03KCAN		3.3V/5V	500/25	55		110	RoHS
TLA05-03KCAN	3W	5V/5V	500/25	68	5-1000	110	RoHS
TLA12-03KCAN		12V/5V	200/25	70		110	CE RoHS
TLA03-03K485L		3.3V/5V	500/25	55		128	CE
TLA05-03K485L	3W	5V/5V	500/25	68	19.2	128	RoHS
TLA12-03K485L		12V/5V	200/25	70		128	RoHS

Package Dimension

TLAxx-03K485/TLAxx-03K485L Series LxWxH: 44.20x19.70x13.00(mm)




Pin-Out

Pin	Function	Pin	Function
1	AC(L)	13	+Vo2
2	-	14	NC
3	AC(N)	15	A
4	-	16	B
5	+V(cap)	17	NC
6	-	18	CON
7	-V(cap)	19	RXD
8	-	20	TXD
9	-	21	VDD
10	-	22	+Vo1
11	-	23	-Vo1
12	-Vo2		

Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 1.00[\pm 0.010]$

TLAxx-03KCAN Series LxWxH: 41.80x19.60x13.00(mm)




Pin-Out

Pin	Function	Pin	Function
1	AC(L)	15	CANH
3	AC(N)	16	CANL
5	+V(cap)	17	RXD
7	-V(cap)	18	TXD
12	-Vo2	19	VDD
13	+Vo2	20	+Vo1
14	NC	21	-Vo1

Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 1.00[\pm 0.040]$

Typical Application Circuit

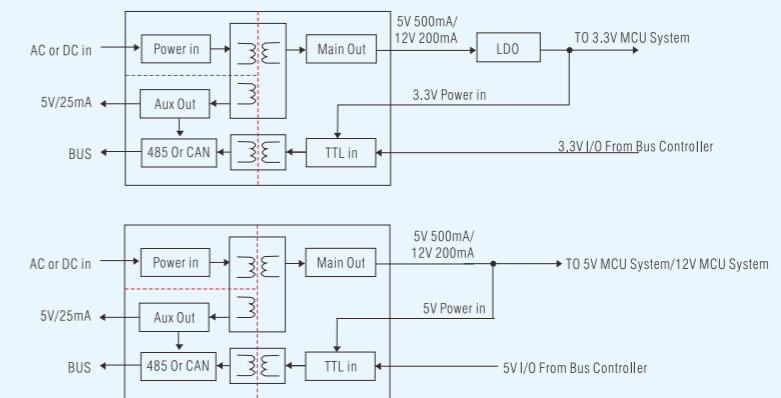

Dual isolated RS232 transceiver (high-rate)



Features

- Operating temperature: -40°C to +85°C
- Isolation: 2500VDC(meet EIA/TIA-232-F standard)
- Integrated high efficiency isolated power supply
- TD30xD232H compatible with the UART port of +3.3V
- TD50xD232H compatible with the UART port of +5V
- Low power consumption, low to 35mA
- ESD protection(human body discharge: ±4KV), complete EMC recommended circuit
- Meet EIA/TIA-232-F standard




Product Program

Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD302D232H	3.0-3.6	0-115.2Kbps	2	High-rate	RoHS
TD502D232H	4.5-5.5	0-115.2Kbps	2	High-rate	

Note: Customization is acceptable.

Package Dimension

TDx02D232H Series LxWxH: 20.00x17.00x7.00(mm)

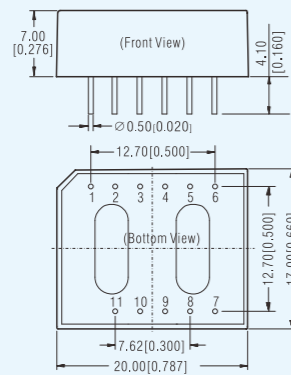

Pin-Out

Pin	Function
1(VCC)	Input Power +
2(GND)	GND
3(TXD1)	TTL/CMOS Input
4(RXD1)	TTL/CMOS Output
5(TXD2)	TTL/CMOS Input
6(RXD2)	TTL/CMOS Output
7(R2IN)	Rs-232 Input
8(T2OUT)	Rs-232 Output
9(R1IN)	Rs-232 Input
10(T1OUT)	Rs-232 Output
11(RGND)	Isolation Power Output RGND

Unit: mm[inch]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.25[±0.010]

SMD signal self-driving conditioning module



Features


- Isolation: 2500VDC
- Two-port isolation (signal input and signal output)
- Frequency response ≥ 2kHz
- Full and zeros adjustment functions
- High precision & linearity < 0.1%
- Extremely low temperature coefficient: 50PPM/°C(Typ., within -40°C to +85°C)
- Compact size SMD Package



Product Program


Model Number	Input Power 1 / Input Power 2	Input Signal	Output Signal	Certification
TN555T	12V/12V	0-10V	0-10V	RoHS CE (pending)
TN655T		0-5V	0-10V	
TN755T		0-2.5V	0-10V	
TN565T		0-10V	0-5V	
TN865T		0.5V-2.5V	0-5V	
TN575T		0-10V	0-2.5V	
TN875T	0.5V-2.5V	0-2.5V		
TN511T	12V/15V	0-10V	4-20mA	
TN611T		0-5V	4-20mA	
TN711T		0-2.5V	4-20mA	
TN521T		0-10V	0-20mA	
TN621T		0-5V	0-20mA	
TN521T		0-10V	0-20mA	
TN721T		0-2.5V	0-20mA	

Schematic diagram

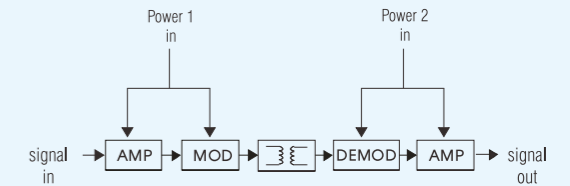



Package Dimension

TN_T(current output type) Series LxWxH: 23.00x13.00x6.50(mm)




Pin-Out

Pin	Function
1	GND
2	SG
3	Vee
4	Vcc
7	Vin
8	GND
9	Sin+
10	ZR
15	Sout+
16	Sout-





Unit: mm[inch]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.5[±0.020]
The layout of the device is for reference only, please refer to the actual product.

TN_T(voltage output type) Series LxWxH: 21.00x13.00x6.50(mm)



Pin-Out

Pin	Function
1	Pin2-
2	Pin2+
7	Pin1+
8	Pin1-
9	Sin+
10	SZ
11	ZR
14	SG
15	Sout-
16	Sout+




Unit: mm[inch]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.5[±0.020]
The layout of the device is for reference only, please refer to the actual product.

Active high precision positive signal conditioning module

CE RoHS

Features

- Isolation: 2000VAC/60s
- Two-terminal isolation (signal input and signal output)
- Frequency response ≥ 2 KHz
- Gain adjustment and zero adjustment function
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C (within -40°C to +85°C)

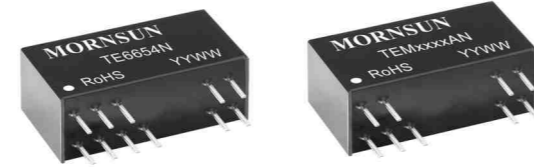

Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE1530N	24	4-20mA	0-10V	None	RoHS CE
TE1533N	24	4-20mA	0-10V	24V	
TE1550N	12	4-20mA	0-10V	None	
TE1630N	24	4-20mA	0-5V	None	
TE1633N	24	4-20mA	0-5V	24V	
TE1660N	5	4-20mA	0-5V	None	
TE5534N	24	0-10V	0-10V	15V	
TE5544N	15	0-10V	0-10V	15V	
TE5554N	12	0-10V	0-10V	15V	
TE5634N	24	0-10V	0-5V	15V	
TE6634N	24	0-5V	0-5V	15V	
TE6644N	15	0-5V	0-5V	15V	
TE6654N	12	0-5V	0-5V	15V	
TE6664N	5	0-5V	0-5V	15V	
TE5530AN	24	± 10 V	0-10V	None	
TE5650AN	12	± 10 V	0-5V	None	
TE6630AN	24	± 5 V	0-5V	None	


Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE5540CN	15	± 10 V	± 10 V	None	RoHS CE
TE5550CN	12	± 10 V	± 10 V	None	
TE6640CN	15	± 5 V	± 5 V	None	RoHS CE
TE6650CN	12	± 5 V	± 5 V	None	
TEM5630AN	24	± 75 mV	0-5VDC	None	RoHS CE
TEM6650AN	12	± 100 mV	0-5VDC	None	
TEM6640AN	15	± 100 mV	0-5VDC	None	
TEM4540CN	15	± 50 mV	± 10 VDC	None	
TEM6540CN	15	± 100 mV	± 10 VDC	None	
TEM6640CN	15	± 100 mV	± 5 VDC	None	
TEM7650CN	12	± 200 mV	± 5 VDC	None	

Package Dimension LxWxH: 26.00x9.50x12.50(mm) TE_AN/CN Series


Pin-Out	
Designation	Function
1(Sin+)	Signal input(+)
2(Sin-)	Signal input(-)
8(Sout-)	Signal output(-)
9(Sout+)	Signal output(+)
10(Pin+)	Power supply(+)
11(GND)	Distribution GND
Others: NC	

Unit: mm[inch]
Pin section tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.25[\pm 0.010]$

Wiring Diagram TE_AN/CN Series

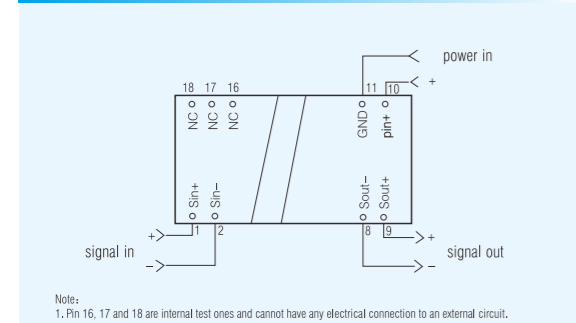

Schematic diagram TE_N Series

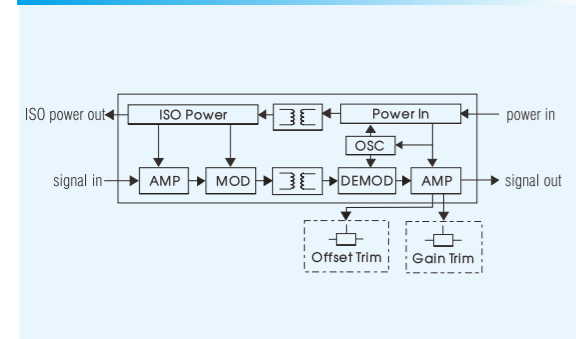

Package Dimension LxWxH: 26.00x9.50x12.50(mm) TE_N Series

Pin-Out	
Designation	Function
1(Sout+)	Signal output(+)
2(Sout-)	Signal output(-)
3(SG)	Gain regulation
8(Sin-)	Signal input(-)
9(Sin+)	Signal input(+)
10(Pout+)	Isolation power output(+)
11(Pout-)	Isolation power output(-)
*15(ZR)	Zero auxiliary regulation
16(SZ)	Zero regulation
17(Pin-)	Power input(-)
18(Pin+)	Power input(+)

*Note: the power supply of 24V without 15 Pin
Unit: mm[inch]
Pin section tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.25[\pm 0.010]$

SMD Active high precision positive signal conditioning module

RoHS

Features

- Isolation: 2000VAC
- Two-port isolation (signal input and signal output)
- Frequency response ≥ 2 kHz
- Full and zeros adjustment functions
- High precision & linearity: 0.1% F.S
- Low ripple & noise: 30mVpp.TYP, 20MHz
- Extremely low temperature coefficient: 50PPM/°C (within -40°C to +85°C)
- Compact size: SMD16 Package(21.00*14.50*6.40mm)



Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE1660T	5	4-20mA	0-5V	None	RoHS
TE6660T	5	0-5V	0-5V	None	

Package Dimension

TE1660T Series LxWxH: 21.00x14.50x6.40(mm)

TE6660T Series LxWxH: 21.00x14.50x6.40(mm)

Pin-Out		
Pin	Designation	Function
1	Sout+	Signal output(+)
2	Sout-	Signal output(-)
3	SG	Gain regulation
4	SZ	Zero regulation
7	Sin-	Signal input(-)
8	Sin+	Signal input(+)
9	NC	No function pin
13	SZ-	Zero auxiliary regulation(-)
14	SZ+	Zero auxiliary regulation(+)
15	Pin-	Power input(-)
16	Pin+	Power input(+)

Pin-Out		
Pin	Designation	Function
1	Sout+	Signal output(+)
2	Sout-	Signal output(-)
3	SG	Gain regulation
6	SZ	Zero regulation
7	Sin-	Signal input(-)
8	Sin+	Signal input(+)
9	SZ+	Zero auxiliary regulation(+)
10	SZ-	Zero auxiliary regulation(-)
15	Pin-	Power input(-)
16	Pin+	Power input(+)


Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.5[\pm 0.020]$
The layout of the device is for reference only, please refer to the actual product.

Active high precision output signal conditioning module

Features

- Isolation: 2000VAC/60s
- Two-terminal isolation (signal input and signal output)
- Frequency response ≥ 2 KHz
- Gain adjustment and zero adjustment function
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C (within -40°C to +85°C)

Package Dimension LxWxH: 26.00x9.50x12.50(mm)

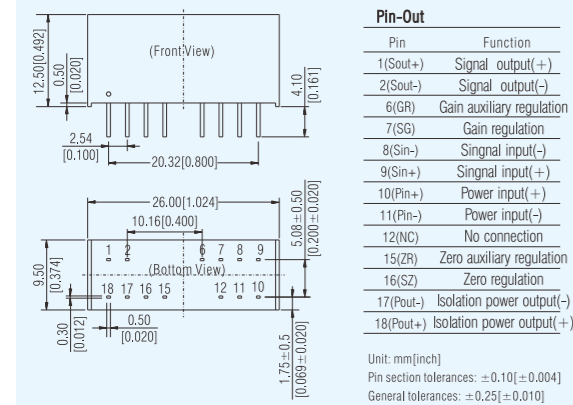


Product Program

Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TF5134N	24	0-10V	4-20mA	15V	RoHS CE
TF5234N	24	0-10V	0-20mA	15V	
TF5534N	24	0-10V	0-10V	15V	
TF5554N	12	0-10V	0-10V	15V	
TF5634N	24	0-10V	0-5V	15V	
TF6134N	24	0-5V	4-20mA	15V	
TF6234N	24	0-5V	0-20mA	15V	
TF6250N	12	0-5V	0-20mA	/	
TF6254N	12	0-5V	0-20mA	15V	
TF6664N	5	0-5V	0-5V	15V	
TF6550GN	12	0-5V	-10Vto +10V	/	

Note: customization is acceptable.

Schematic diagram

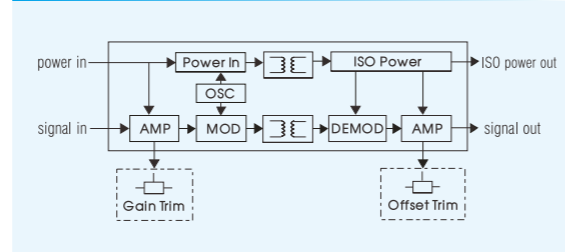

Active high precision PWM input signal conditioning module

Features


- Two-terminal isolation (signal input and signal output)
- High linearity (0.1% F.S.)
- Isolation voltage (2KVAC/60s)
- Low ripple & noise: (≤ 30 mVpp.TYP, 20MHz)
- Compact size: DIP18 (26*9.5*12.5mm)
- ESD protection (IEC/EN61000-4-2 Contact ± 4 KVperf. Criteria B)
- PWM signal input

Product Program


Model Number	Power Supply (VDC)	Input Signal(%)	Output Signal	Isolation Power Output	Certification
TFW260N	5V	0-100	0-20mA	None	RoHS CE
TFW560N	5V	0-100	0-10V	None	
TFW660N	5V	0-100	0-5V	None	

Note: Over nominal loop power voltage may damage modules.

Application Circuit Diagram

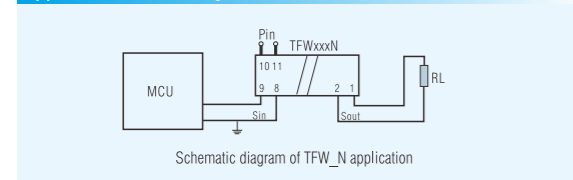

Package Dimension LxWxH: 26.00x9.50x12.50(mm)

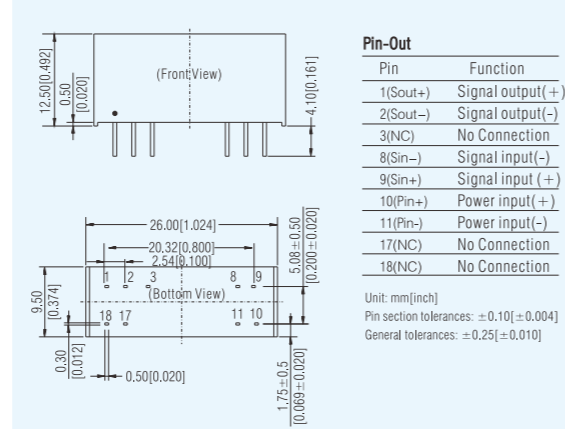

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Active high precision signal conditioning module

Features

- Isolation: 2500VDC
- Four-terminal isolation(T-P), Three-terminal isolation(T-CP)
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C (within -40°C to +85°C)
- Low cost, compact package, high reliability, convenient to use

Product Program

Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
T1130P	24	4-20mA	4-20mA	None	RoHS
T1133P	24	4-20mA	4-20mA	24V	
T2233P	24	0-20mA	0-20mA	24V	
T5133P	24	0-10V	4-20mA	24V	
T5530P	24	0-10V	0-10V	None	CERoHS
T6130P	24	0-5V	4-20mA	None	RoHS
T6235P	24	0-5V	0-20mA	12V	
T6630P	24	0-5V	0-5V	None	
T6650P	12	0-5V	0-5V	None	


Product Program

Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
T5530CP	24	± 10 V	± 10 V	None	RoHS
T5540CP	15	± 10 V	± 10 V	None	
T6630CP	24	± 5 V	± 5 V	None	
T6640CP	15	± 5 V	± 5 V	None	
T6650CP	12	± 5 V	± 5 V	None	
T6660CP	5	± 5 V	± 5 V	None	


Note: Customization is acceptable.

Package Dimension

TxxxxP Series LxWxH: 31.60x20.30x10.20(mm)

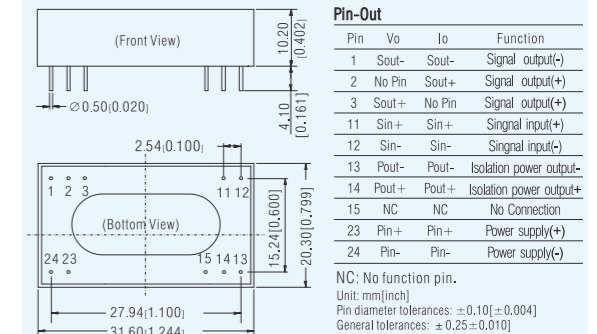

TxxxxCP Series LxWxH: 31.60x20.30x10.20(mm)

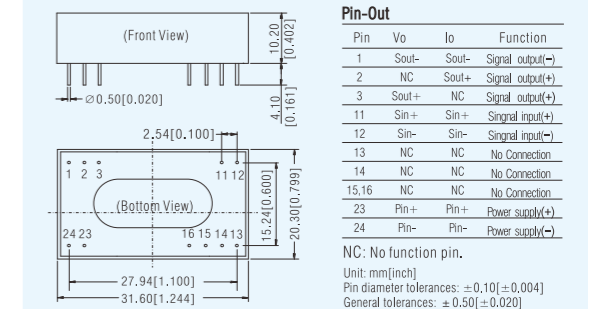

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Active high precision (mV-class input) signal conditioning module RoHS


Features

- Three-terminal isolation
- High precision & linearity: 0.1%F.S
- Isolation: 2500VDC
- Extremely low temperature coefficient: 50PPM/°C (within -25°C to +71°C)
- Low cost, compact package, high reliability, convenient to use




Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TM1130P	24	0~10mV	4~20mA	None	RoHS
TM3130P	24	0~30mV	4~20mA	None	
TM4130P	24	0~50mV	4~20mA	None	
TM4150P	12	0~50mV	4~20mA	None	
TM5230P	24	0~75mV	0~20mA	None	
TM6130P	24	0~100mV	4~20mA	None	
TM2550P	12	0~20mV	0~10V	None	
TM2650P	12	0~20mV	0~5V	None	
TM3650P	12	0~30mV	0~5V	None	
TM4530P	24	0~50mV	0~10V	None	
TM4630P	24	0~50mV	0~5V	None	
TM4650P	12	0~50mV	0~5V	None	
TM4660P	5	0~50mV	0~5V	None	
TM4S50P-2.5	12	0~50mV	0~2.5V	None	
TM5530P	24	0~75mV	0~10V	None	
TM5630P	24	0~75mV	0~5V	None	
TM5650P	12	0~75mV	0~5V	None	
TM6530P	24	0~100mV	0~10V	None	
TM6630P	24	0~100mV	0~5V	None	
TM6650P	12	0~100mV	0~5V	None	
TM6S50P-3.3	12	0~100mV	0~3.3V	None	
TM2S60P-2.5	5	0~20mV	0~2.5V	None	
TM5130P	24	0~75mV	4~20mA	None	
TM6660P	5	0~100mV	0~5V	None	
TM1630CP	24	±10mV	±5V	None	
TM2630CP	24	±20mV	±5V	None	
TM4530CP	24	±50mV	±10V	None	
TM4630CP	24	±50mV	±5V	None	
TM5530CP	24	±75mV	±10V	None	
TM5630CP	24	±75mV	±5V	None	
TM6530CP	24	±100mV	±10V	None	
TM6630CP	24	±100mV	±5V	None	
TM7650CP	12	±200mV	±5V	None	


Package Dimension LxWxH: 31.60x20.30x10.20(mm)

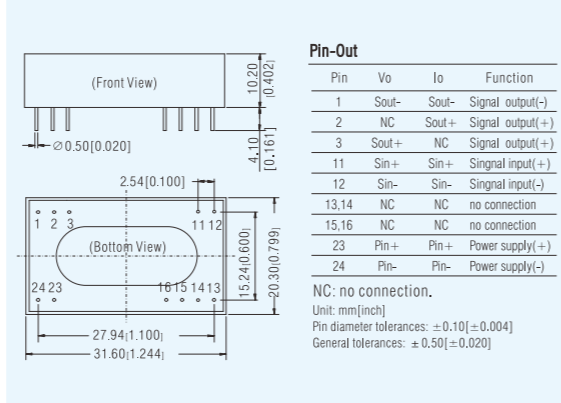

Wiring Diagram

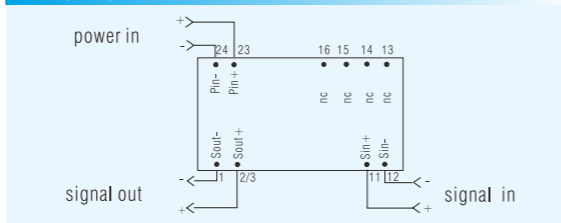

EMC solution-recommended circuit TM_P Series

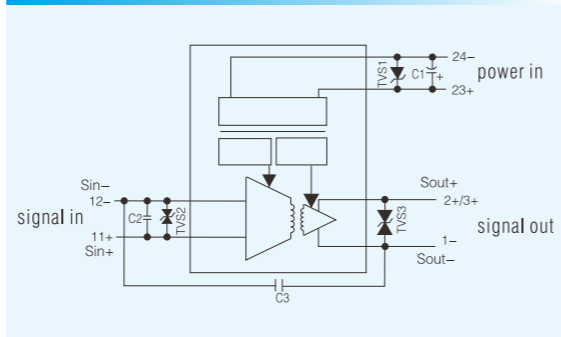

Passive high precision signal conditioning module CE RoHS

Features


- Isolation: 3000VDC
- Two-terminal isolation (signal input and signal output)
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 35PPM/°C
- Low voltage-drop: 3V typ. (20mA input)
- High reliability(MTBF > 500,000 hours)

Product Program



Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Channel	Certification
T1100L	None	4~20mA	4~20mA	None	1	CE RoHS
T1100N	None	4~20mA	4~20mA	None	1	
T1100L-F	10-24VDC	4~20mA	4~20mA	None	1	

Note: Over nominal loop power voltage may damage modules.

Application Circuit Diagram T1100L/ N Series

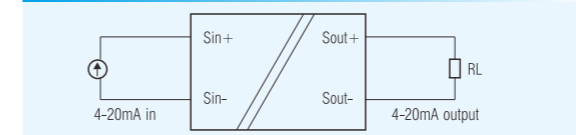


Application Circuit Diagram(Loop Power) T1100L-F Series

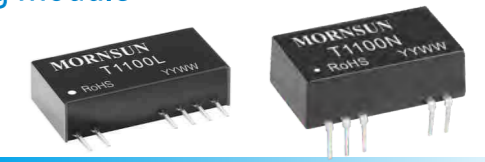
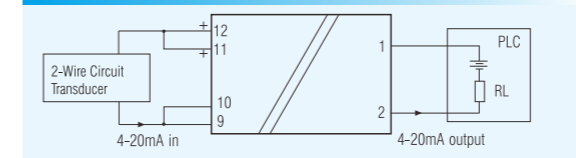


Product Program

T1100L/L-F LxWxH: 32.00x7.90x14.50(mm)		Pin-Out(T1100L)		Pin-Out(T1100L-F)	
Pin	Function	Pin	Function	Pin	Function
1(lin+)	Signal input(+)	1(Vin+)	Power input	1(Vin+)	Power input
2(lin-)	Signal input(-)	2(Io)	Current output	2(Io)	Current output
9,10(Iout-)	Signal output(-)	9,10(Iin)	Current input	9,10(Iin)	Current input
11,12(Iout+)	Signal output(+)	11,12(Vout+)	Power output	11,12(Vout+)	Power output



T1100N LxWxH: 23.80x16.75x8.00(mm)

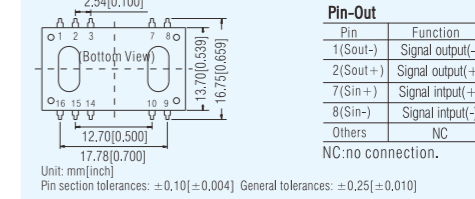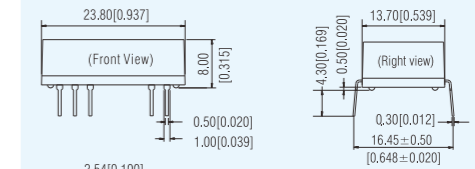

Two-wire loop power supply signal conditioning module(with HART) CE RoHS

Features


- 4~20mA output loop stealing, 3.3V regulated output(loop power)
- Isolation: 2000VAC/1mA/60s
- Two-terminal isolation (signal input and signal output)
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C
- Convert digital signal(PWM) into 4~20mA
- HART compatible

Product Program



Model Number	Loop Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
T747HL	10-24V	0-2.5V	3.7-22mA	3.3V	CE RoHS
T797HL	15-24V	0-2.5V	3.7-22mA	3.3V	
T747L	10-24V	0-2.5V	3.7-22mA	3.3V	
TW147HL	10-24V	0-100%	4~20mA	3.3V	

Note: Customization is acceptable.T747L is without HART.

Application with HART

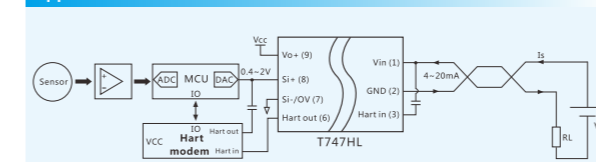

Package Dimension LxWxH: 26.00x9.50x12.50(mm)

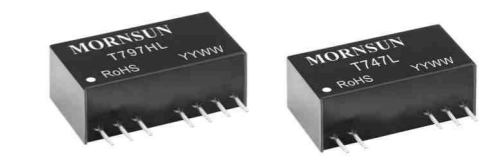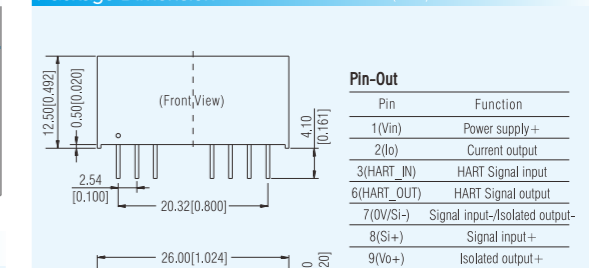

Active detection type RTD signal conditioning module

CE RoHS

Features

- Two-wire, three-wire, four-wire pt100 RTD signal
- Isolation: 2000VAC
- High precision & linearity: 0.2%F.S
- Extremely low temperature drift: 50PPM/°C(Typ., within -40°C to +85°C)
- International standard signal output: 4-20mA/0-5V/0-10V etc.
- Low cost, compact package, high reliability, convenient to use




Product Program


Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TRP16130P	24	Pt100(0-200°C)	4-20mA	None	RoHS CE
TRP15130P	24	Pt100(0-100°C)	4-20mA	None	
TRP18130P	24	Pt100(-50-150°C)	4-20mA	None	
TRP15S30P-2.5	24	Pt100(0-100°C)	0-2.5V	None	
TRP16150P	12	Pt100(0-200°C)	4-20mA	None	
TRP17130P	24	Pt100(0-500°C)	4-20mA	None	

Note: Customization is acceptable.

Application Circuit Diagram

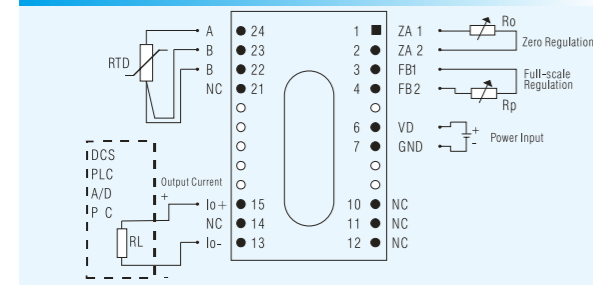

Package Dimension LxWxH: 31.60x20.30x10.20(mm)

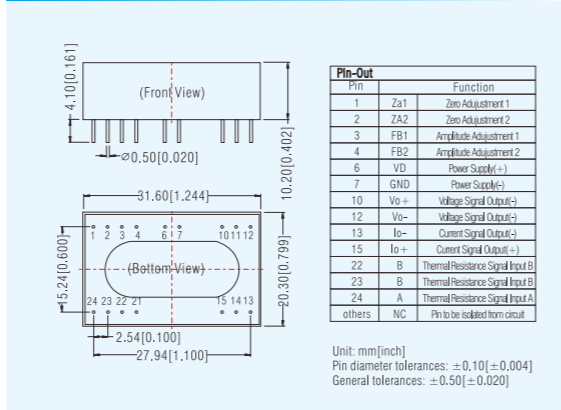

DC/DC converter for IGBT driver


CE RoHS

Features

- Operating temperature: -40°C to +105°C
- Efficiency up to 81%
- Isolation: 3000VAC
- Low isolation capacitance
- No-load operation allowed
- Ultra-miniature SIP package



Package Dimension LxWxH: 19.50x9.80x12.50(mm)

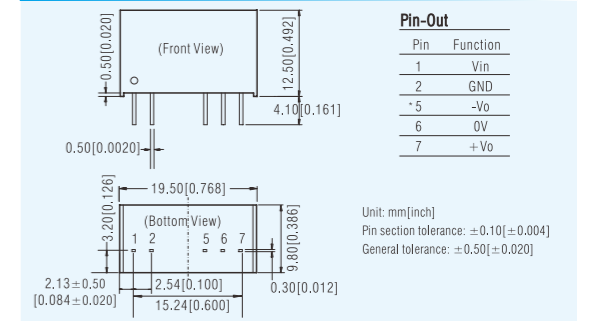

Product Program


Model Number	Nominal Input Voltage(VDC)	Input Voltage Range (VDC)	Positive Output (VDC)	Negative Output (VDC)	Output current(mA)	Efficiency	Max. Capacitive Load(μF)	Certification
QA01	15	14.5-15.5	+15	-8.7	+80/-40	80%	220	RoHS CE CB
QA01-17	15	14.5-15.5	+17	-8.7	+80/-40	80%	220	
QA02	12	11.6-12.4	+15	-8.7	+80/-40	80%	220	
QA03	24	23.3-24.7	+15	-8.7	+80/-40	80%	220	
QA04	12	9-15	+15	-8	+100/-80	80%	220	RoHS
QA121	12	11.4-12.6	+15	-8	+120/-120	81%	1000	
QA151	15	14.25-15.75	+15	-8	+120/-120	81%	1000	
QA241	24	22.8-25.2	+15	-8	+120/-120	81%	1000	

Active high precision high isolation signal conditioning module

RoHS

Features

- Suitable for electric power and railway applications
- Planar transformer bare board technology
- Isolation: 4000VAC/60s
- Two-terminal isolation (signal input and signal output)
- Low ripple & noise: ≤35mVpp (20MHz)
- Extremely low temperature drift: ≤50PPM/°C(within -40°C to +85°C)




Note: design sketch for your reference.

Product Program


Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE6650HN	12	0-5V	0-5V	None	RoHS

Note: Customization is acceptable.

Schematic diagram

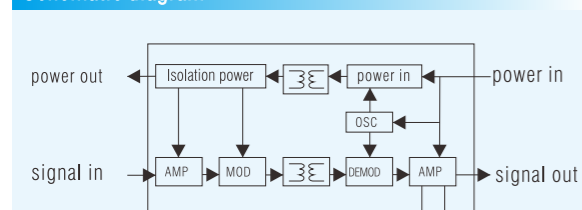

Package Dimension

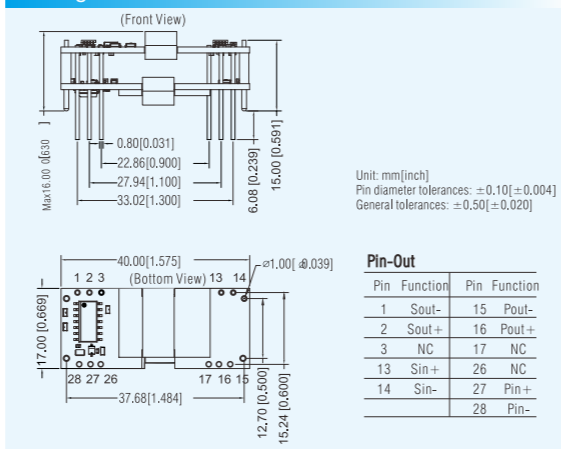

DC/DC converter specialized for SiC MOSFET driver


CE RoHS

Features

- Operating temperature: -40°C to +105°C
- Isolation: 3500VAC/6000VDC (QA051C:3000VAC/5200VDC, QA151C3:3500VAC/5000VDC)
- Efficiency up to 83%
- Extremely low isolation capacitance: 3.5pF
- Continuous short-circuit protection
- DC/DC converter for SiC MOSFET Driv



Package Dimension LxWxH: 19.50x9.80x12.50(mm)

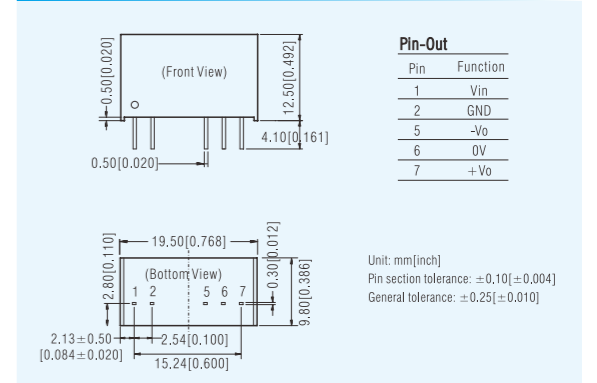

Product Program

Model Number	Nominal Input Voltage (VDC)	Nominal(Range)	Positive Output (VDC)	Negative Output (VDC)	Output current(mA)	Efficiency	Isolation(VAC)	Certification
QA01C	15	13.5-16.5	+20	-4	+100/-100	80	3500	RoHS CE CB
QA1201C-20	12	10.8-13.2	+20	-4	+100/-100	80	3500	
QA2401C-20	24	21.6-26.4	+20	-4	+100/-100	80	3500	
QA15115R2	15	13.5-16.5	+15	-2.5	+100/-100	78	3500	
QA01C-18	15	13.5-16.5	+18	-3	+100/-100	79	3500	RoHS
QA121C2	12	10.8-13.2	+15	-3.5	+111/-111	81	3500	
QA151M	15	13.5-16.5	+15	-5	+100/-100	80	3500	
QA051C	5	4.5-5.5	+20	-5	+80/-40	79	3000	
QA151C3	15	13.5-16.5	+15	-4	+100/-100	82	3500	

• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

Great power DC/DC converter specialized for IGBT driver

CE RoHS

Features

- Operating temperature: -40°C to +85°C / -40°C to +105°C (QAU242D2G)
- High isolation: 12000VDC
- Extremely low isolation capacitance: 3pF
- Efficiency up to 87%
- 2:1 Wide input voltage range (QAW series)
- DIP package
- Continuous short-circuit and input under-voltage protection, self-recovery




Product Program

Model Number	Input Voltage (VDC)	Nominal (Range)	Positive Output (VDC)	Negative Output (VDC)	Output current (mA)	Efficiency	Isolation	Certification
QAW01	12	9-18	+15	-9	+200/-200	85%	3000VDC	RoHS
QAW02	24	18-36	+15	-9	+200/-200	85%	3000VDC	
QA152D	15	13.5-16.5	+15	-9	+200/-200	87%	4000VAC	CE
QA156D-24	15	13.5-16.5	+24	/	+150	80%	12000VDC	RoHS
QAU242D2G	24	9-36	+24	+24	+150/+150	85%	4200VAC	RoHS

Package Dimension

QA156D-24 LxWxH: 51.50x26.50x12.00 (mm)




Pin-Out

Pin	Function
1	GND
2	Vin
3	+Vo
4	0V

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

QAW01/QAW02/QA152D LxWxH: 31.60x20.30x10.20 (mm)




Pin-Out

Pin	Function
2,3	GND
9	0V
11	-Vo
14	+Vo
16	0V
22,23	Vin

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

QAU242D2G LxWxH: 31.70x20.30x12.65 (mm)



Pin-Out

Pin	Function
1	GND
10	-Vo1
12	+Vo1
13	+Vo2
15	-Vo2
24	Vin

Unit: mm[inch]
Pin diameter tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

Automotive wide voltage input DC/DC converter specialized for IGBT driver


RoHS

Features

- Wide input voltage range
- Efficiency up to 83%
- Isolation: 3000VDC
- Operating temperature: -40°C to +105°C
- International standard pin output



Product Program LxWxH: 31.60x20.30x10.20 (mm)

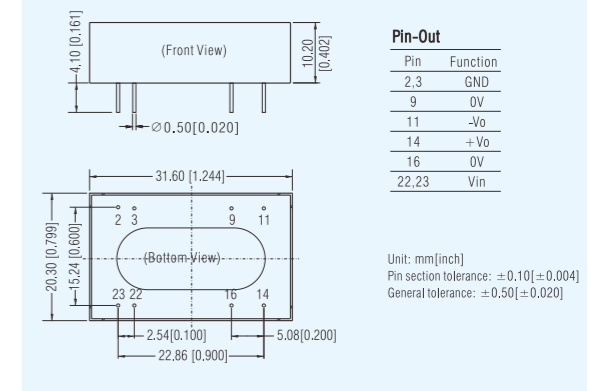

Product Program

Model Number	Nominal Input Voltage (VDC)	Nominal (Range)	Positive Output (VDC)	Negative Output (VDC)	Output current (mA)	Efficiency	Isolation (VAC)	Certification
CQAW01	12	7-18	+15	-9	+200/-200	83%	3000	RoHS

Hybrid integrated IGBT driver (built-in isolated DC/DC converter)


CE RoHS

Features

- Built-in DC/DC isolated power supply, single power supply required
- Isolation: 3750VAC
- Switching frequency up to 20KHz
- Short-circuit and fault feedback function
- Output cut-off after short circuit protection occurs and timing reset
- Adjustable fault detection rejection time (dead zone)
- Adjustable soft-off time



Product Program LxWxH: 52.00x26.00x15.00 (mm)

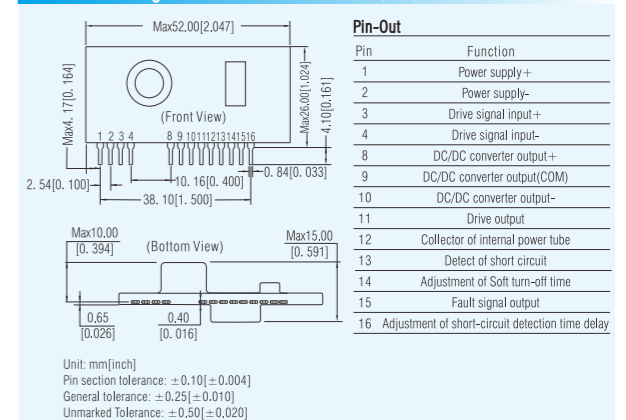

Product Program

Model Number	Nominal Input Voltage (VDC)	Input Voltage Range (VDC)	VOH (VDC)	VOL (VDC)	Output Peak Current (A)	Switching Frequency (Max.) (KHz)	Drive way	Isolation (VAC)	Certification
QP12W08S-37	15	14.5-15.5	15	-9	±8	20	1	3750	CE RoHS

Hybrid integrated IGBT driver

RoHS

Features

- Built-in high CMRR opto-coupler(CMRR: Typ: 30KV/ μ s, Min.: 15KV/ μ s)
- High isolation (3750VRMS/min)
- Short-circuit and fault out function
- Output soft-off when over current occurs and timing reset
- Adjustable short-circuit detection rejection time (dead zone)
- Switching frequency up to 40KHz
- Suitable for 600V/600A,1200V/400A and 1700V/200A series of IGBT modules
- Pin and characteristics compatible with M57962AL



Product Program LxWxH: 51.00x25.00x10.00 (mm)

Pin-Out

Pin	Function
1	Fault detect
2	Reaction time
4	Power supply+
5	Drive output
6	Power supply-
7	Potective threshold adjustment
8	Fault signal output
13	Drive signal input-
14	Drive signal input+
3,9,10	NC

Unit: mm[inch]
Pin section tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.50 [\pm 0.020]$

Series	Positive input Voltage(VDC)	Negative input Voltage(VDC)	Gate voltage (VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Drive way	Isolation (VDC)	Certification
QC962-8A	15	-10	+15/-9	± 8	40	1	3750	RoHS

Constant current great power LED driver

RoHS

Features

- Operating temperature: -40°C to +85°C
- Efficiency up to 97%
- Constant current mode, great power output
- Analogue dimming + PWM dimming
- Remote ON/OFF
- Continuous short-circuit protection



KC24H-R Series

Product Program

Model Number	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (Max)
KC24H-300R(X1/X2/X3)	5,5-46 (24VDC)	3,3-36	0-300	95
KC24H-350R(X1/X2/X3)			0-350	95
KC24H-500R(X1/X2/X3)			0-500	95
KC24H-600R(X1/X2/X3)			0-600	95
KC24H-700R(X1/X2/X3)			0-700	95

Package Dimension LxWxH: 22.80x10.20x9.00 (mm)

PIN CONNECTION

Pin	Function	Comment
1	GND	Do not connect to -Vout
2	ON/OFF/PWM	Leave open if not use
3	Analog dimming	Leave open if not use
4	Vin	DC Supply
5	+Vout	LED Anode connection
6	-Vout	LED Cathode connection

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.25 [\pm 0.010]$

Notes: 1. Series without a suffix such as KC24H-300R, this product is a four-pin product without the functions of analogue dimming and PWM dimming.
2. Series with a suffix X1 such as KC24H-300RX1, this product is a five-pin product only with the function of analogue dimming.
3. Series with a suffix X2 such as KC24H-300RX2, this product is a five-pin product only with the function of PWM dimming.
4. Series with a suffix X3 such as KC24H-300RX3, this product is a six-pin product with the functions of analogue dimming and PWM dimming.

KC24W Series

Product Program

Model Number	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (Max)
KC24W-300 (X1/X2/X3)	5,5-48 (24VDC)	3,3-36	0-300	96
KC24W-350 (X1/X2/X3)			0-350	96
KC24W-500 (X1/X2/X3)			0-500	96
KC24W-600 (X1/X2/X3)			0-600	96
KC24W-700 (X1/X2/X3)			0-700	96

Package Dimension LxWxH: 22.30x12.55x9.10 (mm)

PIN CONNECTION

Pin	Function	Comment
1(red)	+Vin	DC Supply
2(yellow)	AnalogDimming	Leave open if you use
3(white)	ON/OFF/PWM	Leave open if you use
4(black)	GND	Do not connect to -Vout
5(white)	-Vout	LED Cathode connection
6(yellow)	+Vout	LED Anode connection

Unit: mm[inch]
Lead internal diameter: 0.76[0.030];
Lead external diameter: 1.60[0.063];
Lead wire spec: UL1569 300V 105
Unmarked Tolerance: $\pm 0.50 [\pm 0.020]$

Note: 1. Series without suffix such as KC24W-300 are four-wire products without analogue dimming + PWM dimming.
2. Series with suffix X1 such as KC24W-300X1 are five-wire products with analogue dimming only.
3. Series with suffix X2 such as KC24W-300X2 are five-wire products with PWM dimming only.
4. Series with suffix X3 such as KC24W-300X3 are six-wire products with analogue dimming + PWM dimming.

KC24RT Series

Product Program

Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (Max)
KC24RT-300	5,5-48 (24VDC)	3,3-36	0-300	96
KC24RT-350			0-350	96
KC24RT-500			0-500	96
KC24RT-600			0-600	96
KC24RT-700			0-700	96

Package Dimension LxWxH: 23.86x18.10x8.00 (mm)

Pin-Out

Pin	Function	Comment
1	GND	Do not connect to -Vout
7	ON/OFF/PWM	Leave open if not use
8	-Vout	LED Cathode connection
9	+Vout	LED Anode connection
10	Analogue dimming	Leave open if not use
16	Vin	DC Supply

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.25 [\pm 0.010]$

KC24H-1000 & KC24H-1200 Series

Product Program

Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (Max)
KC24H-1000(X1/X2/X3)	5,5-48 (24VDC)	3,3-36	1000	97
KC24H-1200(X1/X2/X3)			1200	97

Package Dimension LxWxH: 31.70x20.30x12.65 (mm)

Pin-Out

Pin	Function	Comment
2,3	GND	Do not connect to -LED
4	ON/OFF/PWM	Leave open if not use
9,11	-LED	LED Cathode connection
14,16	+LED	LED Anode connection
21	Analogue dimming	Leave open if not use
22,23	+Vin	DC Supply

Unit: mm[inch]
Pin diameter tolerance: $\pm 0.10 [\pm 0.004]$
General tolerance: $\pm 0.25 [\pm 0.010]$
Unmarked Tolerance: $\pm 0.50 [\pm 0.020]$

Note: 1. Series without suffix, such as KC24H-1000 are eight-pin products without analogue dimming + PWM dimming function.
2. Series with suffix X1 such as KC24H-1000X1 are nine-pin products with analogue dimming function only.
3. Series with suffix X2 such as KC24H-1000X2 are nine-pin products with PWM dimming function only.
4. Series with suffix X3 such as KC24H-1000X3 are ten-pin products with analogue dimming + PWM dimming function.


• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

KC24JT-xxxR3 Series

Product Program				
Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi.(%) (Max)
KC24JT-300R3	6-36 (24VDC)	3.3-36	300	91
KC24JT-700R3			700	

Package Dimension LxWxH: 21.50x16.72x5.20(mm)

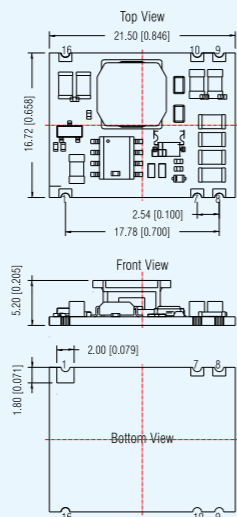

Pin	Function
1	GND
7	On/Off/PWM
8	-Vo
9	+Vo
10	Analogue Dimming
16	Vin

Unit: mm[inch]
General tolerance: ±0.50[±0.020]

Ultra-thin analog signal isolator

Features


- Operating temperature: -25°C to +71°C
- Precision: 0.1% F.S.
- Isolation: 2000VAC (testing for 1Min, humidity < 70%, leakage current < 1mA)
- Input, output and power supply are mutually isolated from each other
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

Product Program				
Model Number	Input Voltage Range(VDC)	Input Signal	Output Signal	Channel
TA100W-XX	18-30VDC	4-20mA	4-20mA; 0-10V	1 in 1 out
TA140W-XX		0-10V	0/4-20mA; 0-10V	
TA600W-XX	18-30VDC	4-20mA	4-20mA; 0-10V	1 in 2 out
TA640W-XX		0-10V	4-20mA; 0-10V	
TA200W-XX	18-30VDC	4-20mA	4-20mA; 0-10V	2 in 2 out
TA240W-XX		0-10V	0/4-20mA; 0-10V	

Wiring Diagram

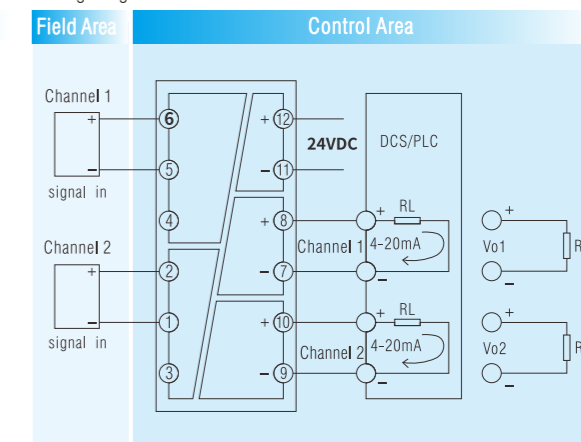

Note: above is wiring diagram of 2-wire circuit. Series with 1 in 2 out only connect input terminal with Channel 1, with 1 in 1 out connect input terminal and output terminal with Channel 1.

Ultra-thin analog signal isolator

Features


- Operating temperature: -25°C to +71°C
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S.
- Isolation: 2000VAC (testing for 1Min, humidity < 70%, leakage current < 1mA)
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

Product Program				
Model Number	Input Voltage Range(VDC)	Input Signal	Output Signal	Channel
TA105W-XX	18-30VDC	4-20mA	4-20mA, 1-5V; 0-10V	1 in 1 out
TA605W-XX	18-30VDC	4-20mA	4-20mA, 0-10V	1 in 2 out
TA205W-XX	18-30VDC	4-20mA	4-20mA, 0-10V	2 in 2 out

Wiring Diagram

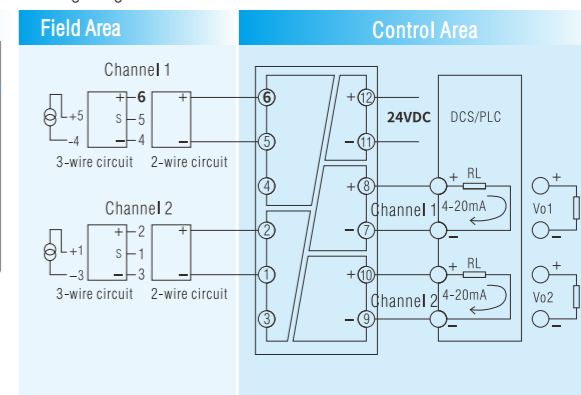

Note: above is wiring diagram of 2-wire circuit. Series with 1 in 2 out only connect input terminal with Channel 1, with 1 in 1 out connect input terminal and output terminal with Channel 1.


Ultra-thin passive signal isolator

Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC/3000VDC (testing for 1Min, humidity < 70%, leakage current < 5mA)
- Precision: 0.1% F.S.
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Product Program			
Model Number	Input Signal	Output Signal	Channel
TA106W-11	4-20mA	4-20mA	1 in 1 out
TA206W-11	4-20mA	4-20mA	2 in 2 out
TA306W-11	4-20mA	4-20mA	3 in 3 out

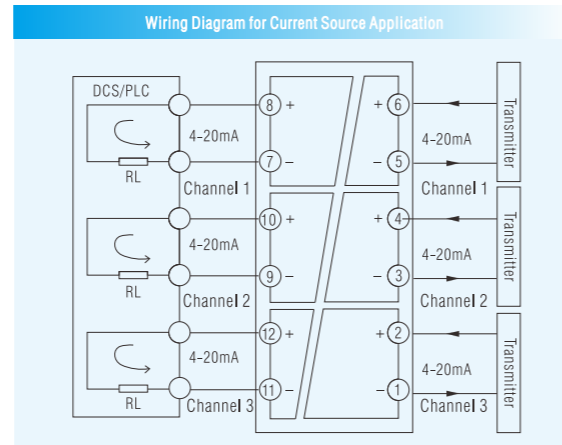

Ultra-thin programmable RTD signal isolator with perfect EMC performance


Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC (testing for 1Min, humidity < 70%RH, leakage current < 1mA)
- Precision: 0.1% F.S.
- Temperature drift: 50PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Product Program			
TR100PWE TR140PWE	Descriptions		
	Type of Signal	Measuring Range	Measuring (Min.)
Input Signal	Pt100	-200°C to +850°C	50°C
	Cu50	-50°C to +150°C	50°C
	Cu100	-50°C to +150°C	50°C
output signal	Output Current	0/4-20mA (Programmable)	
	Output Voltage	0/1-5V; 0/2-10V (Programmable)	

Wiring Diagram

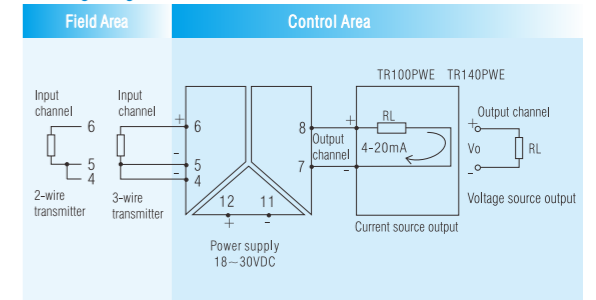

Note:
1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable.
2. The ancillary USB adapter model is T-01, please contact our sales department.


Ultra-thin programmable RTD signal isolator

Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC (testing for 1Min, humidity < 70%, leakage current < 5mA)
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S./Max. (0.5°C)
- Temperature drift: 50PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

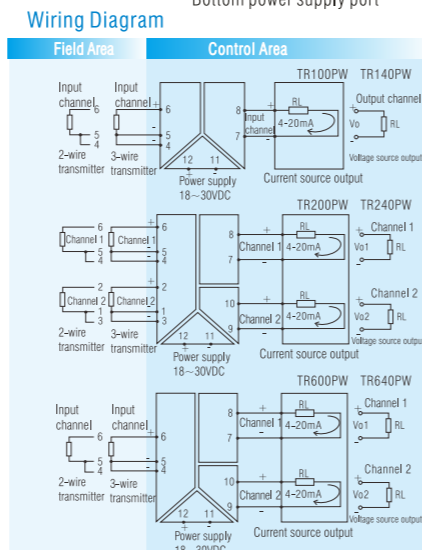

Product Program			
TR1x0PW TR6x0PW TR2x0PW	Descriptions		
	Type of Signal	Measuring Range	Measuring (Min.)
Input Signal	Pt100	-200°C to +850°C	50°C
	Cu50	-50°C to +150°C	50°C
	Cu100	-50°C to +150°C	50°C
output signal	Output Current	0/4 to 20mA (Programmable)	
	Output Voltage	0/1 to 5V; 0/2 to 10V (Programmable)	

Note:
1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable.
2. The ancillary USB adapter model is T-01, please contact our sales department.

Ultra-thin programmable thermocouple signal isolator


Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC (testing for 1Min, humidity < 70%, leakage current < 5mA)
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S.
- Temperature drift: 50PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

Wiring Diagram

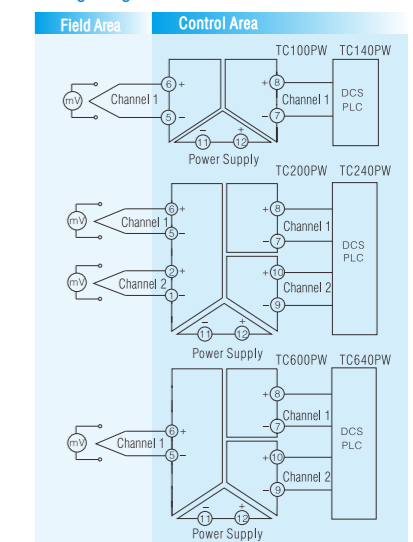

Product Program			
Type of Output	1 in 1 out	2 in 2 out	1 in 2 out
Model Number	TC100PW	TC200PW	TC600PW
	TC140PW	TC240PW	TC640PW
Input Signal	Type of Signal	Measuring Range	Measuring (Min.)
	R	-40°C to +1700°C	600°C
	S	-40°C to +1700°C	600°C
	K	-150°C to +1370°C	120°C
	J	-80°C to +900°C	100°C
	T	-160°C to +390°C	100°C
	B	320°C to +1820°C	780°C
output signal	Output Current	0/4-20mA (Programmable)	
	Output Voltage	0/1-5V; 0/2-10V (Programmable)	

Note:
1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable.
2. The ancillary USB adapter model is T-01, please contact our sales department.

AC/DC power supply IC


Control IC

Features

- 0.1-60W
- Output over-voltage protection
- Fsw: 110khz
- Package: SOP-7/SOP-8

Product Program										
Model Number	Power (W)	Package	Topology	Control Mode	Vds(max) (V)	HV	Fsw (kHz)	OTP ¹	OVP ²	OCP ³
SCM1702A	≤ 5	SOP-7	flyback	current mode PSR	650	✓	110	built-in	built-in	built-in
SCM1703A	≤ 5	SOP-7	flyback	current mode SSR	650	✓	110	built-in	built-in	built-in
SCM1710A	5-60	SOP-8	flyback	current mode SSR	-	-	110	external	built-in	built-in

Note: 1. Over temperature protection
2. Over output voltage protection
3. Over current protection

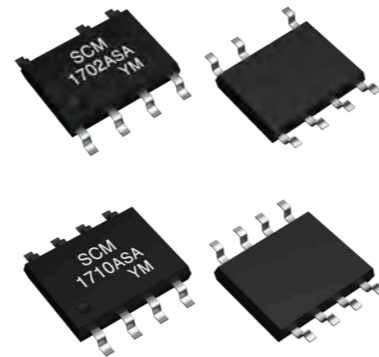


Start-up IC


Features

- Input voltage range: 40-700VDC
- Operating junction temperature: -40°C to +125°C
- Bias mains voltage up to 20V
- Package: SOT-23

Product Program						
Model Number	Package	Input Voltage Range(VDC)	Ivdd(min)(mA)	Ivdd(max)(mA)	Operating Junction Temperature(°C)	Vvdd(max)(V)
SCM9601A	SOT-23	40-700	0.8	4	-40 to +125	20
SCM9602A	SOT-23	40-700	1	4	-40 to +125	20




Typical Application Circuit

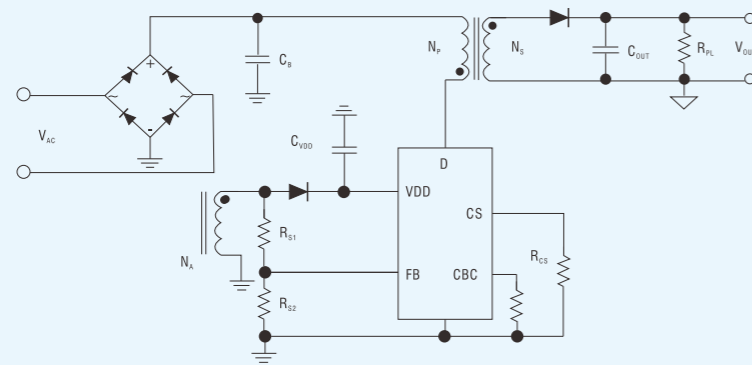


SCM1702A Application Diagram


Typical Application Circuit

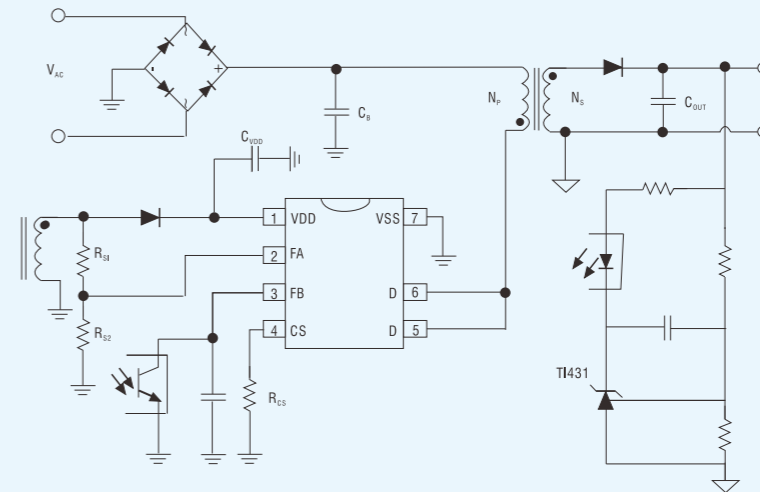

SCM1703A Application Diagram

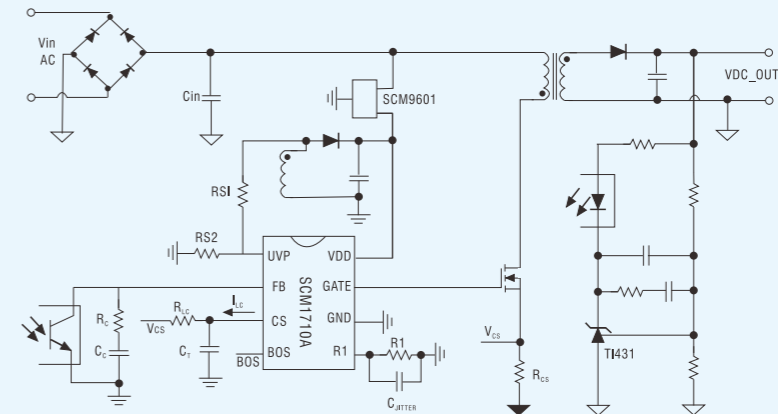

SCM1710A / SCM9601A Application Diagram

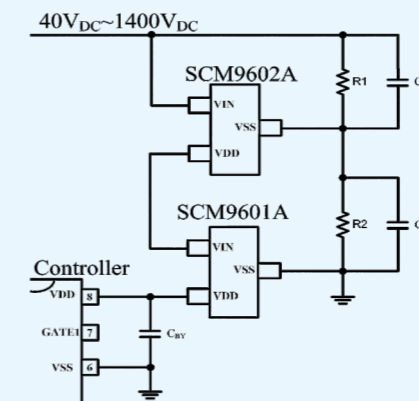

SCM9602A Application Diagram

• This catalog is used to introduce our latest products, for more information, please contact our sales department

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com

DC/DC power supply IC

Control IC


Features

- 0.1-40W
- Topology: Flyback, forward, push-pull
- Package: MSOP-8/SOT-23-6/SOT-23-5

Product Program

Model Number	Power (W)	Package	Topology	Control Mode	V _{ds(max)} (V)	OTP ¹	OCP ²	SCP ³	UVLO ⁴	OLP ⁵
SCM1101A	5-40	MSOP-8	flyback/forward	current mode	480	/	built-in	built-in	built-in	built-in
SCM1201A	≤1	SOT-23-6	push-pull	current mode	/	built-in	/	built-in	built-in	/
SCM1212A	≤1	SOT-23-5	push-pull	current mode	/	built-in	/	built-in	built-in	/

Note: 1. Over temperature protection
2. Over current protection
3. Short circuit protection
4. Under-voltage lockout
5. Over-load protection

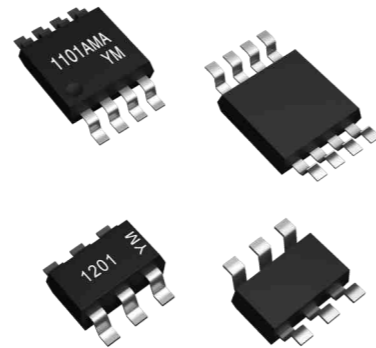


Start-up IC

Features

- Input voltage range: 4-85VDC
- Operating junction temperature: -40°C to +125°C
- Bias mains voltage up to 10V
- Package: SOT-23

Product Program

Model Number	Package	Input Voltage Range(VDC)	I _{vdd(min)} (mA)	I _{vdd(max)} (mA)	Operating Junction Temperature(°C)	V _{vdd(max)} (V)
SCM9603B	SOT-23	4-85	2.3	20	-40 to +125	10




Non-isolated buck control IC

Features


- Input voltage range: 4.5-40V
- Switching frequency high up to 700kHz
- Output current high up to 6A
- Build-in compensation circuit and soft-start function
- Over-current and over-temperature protections
- package: TSOT23-6L /QFN5*5-20

Product Program


Model Number	Package	V _{cc} (V)	Output Current (max)(A)	Switching Frequency(KHz)	Operating Junction Temperature(°C)	Synchronous Rectification
SCM1301A	TSOT23-6L	4.5-40	1	700	-40 to +125	/
SCM1316A	QFN5*5-20	7-38	6	130-300	-40 to +125	√




Typical Application Circuit

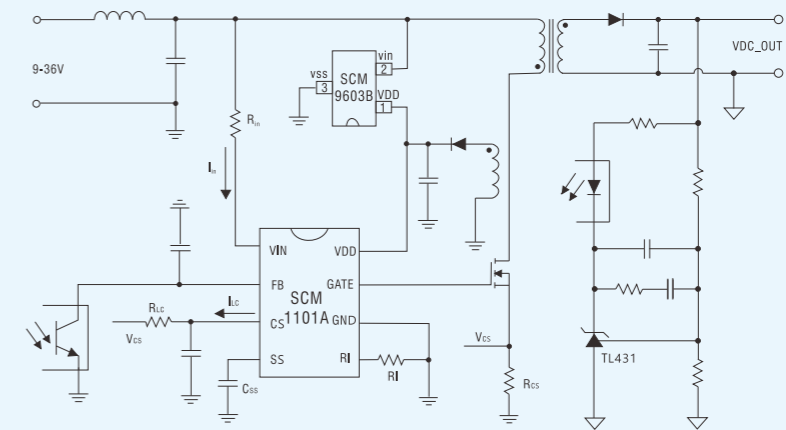

SCM1101A / SCM9603B Application Diagram

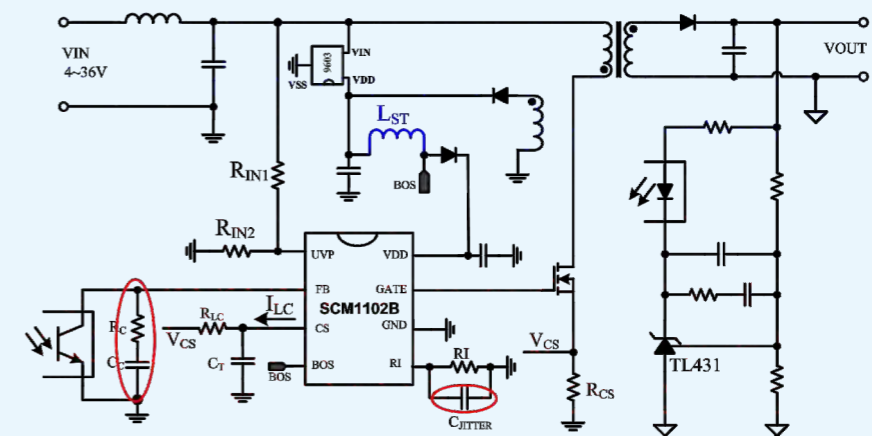


SCM9603B Application Diagram

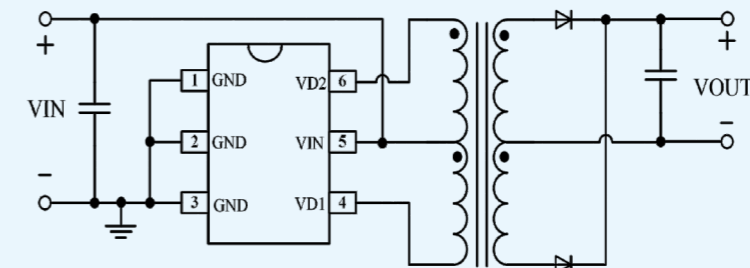


SCM1201A Application Diagram


Typical Application Circuit

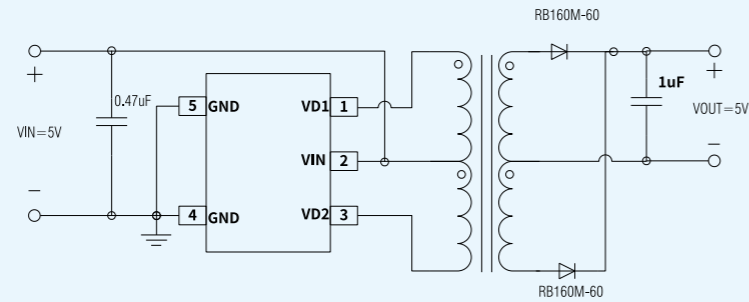

SCM1212A Application Diagram

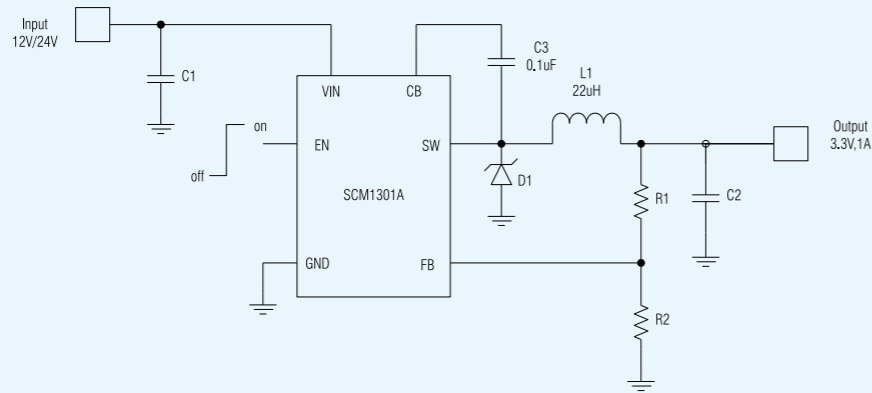


SCM1301A Application Diagram

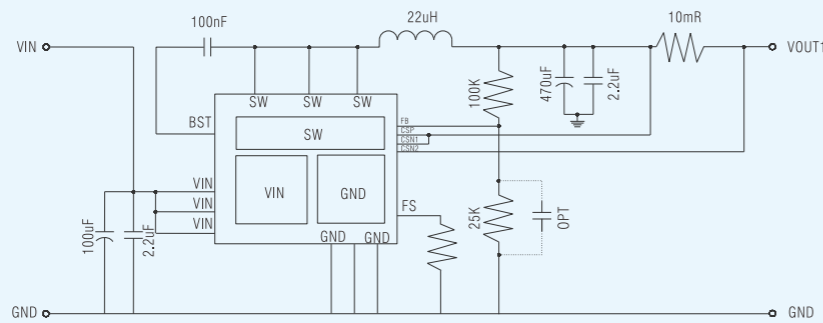

SCM1316A Application Diagram (Single channel)

• This catalog is used to introduce our latest products, for more information, please contact our sales department

Typical Application Circuit

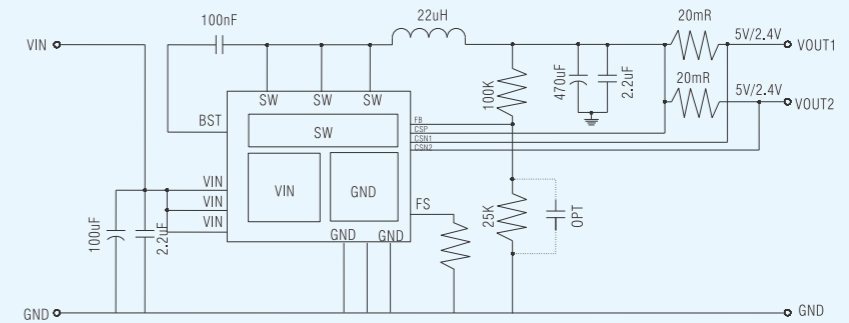


SCM1316A Application Diagram (Dual channel)

Interface IC

Features


- Supply voltage range, Vcc: 4.5-5.5V/3.0-3.6V
- Half-duplex
- Data bus: RS485 / CAN
- Baud rate up to 12Mbps
- Nodes: 256(485) / 110(CAN)
- Package: SOP-8, DFN 3X3

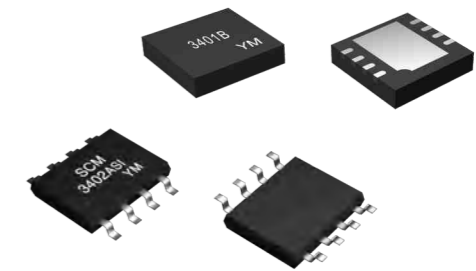

Product Program

Model Number	Data bus	Nodes	Package	Duplex Mode	NO. of TX	NO. of TR	Vcc(V)	Baud Rate (Mbps)
SCM3401A	RS485	256	SOP-8	Half	1	1	4.5-5.5	1
SCM3401B	RS485	256	DFN 3X3	Half	1	1	4.5-5.5	1
SCM3402A	RS485	256	SOP-8	Half	1	1	3.0-3.6	12
SCM3421A	CAN	110	SOP-8	Half	1	1	4.5-5.5	1
SCM3422A	CAN	110	SOP-8	Half	1	1	4.5-5.5	1
SCM3423A	CAN	110	SOP-8	Half	1	1	4.5-5.5	1


Typical Application Circuit

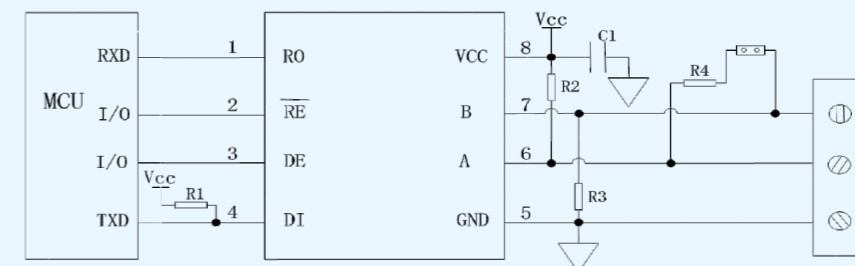


SCM3401A / SCM3401B / SCM3402A Application Diagram

• This catalog is for reference only, please visit our website for detailed datasheets: www.mornsun-power.com


Typical Application Circuit

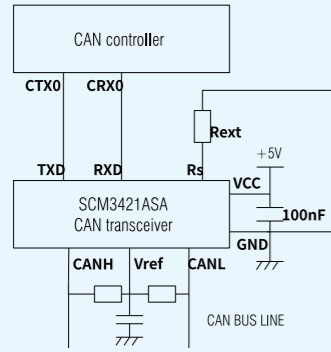

SCM3421A Application Diagram

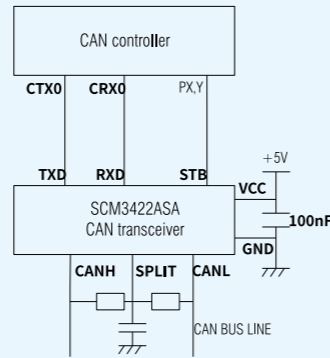

SCM3422A Application Diagram

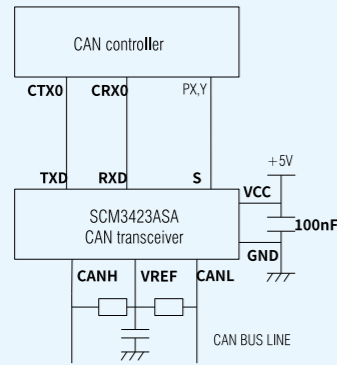


SCM3423A Application Diagram

Contactor power saving controller IC

Features

- Power supply range: 16.5-500V/7-40V
- The input voltage is detected in real time, and the contactor operating voltage can be accurately set
- Work in a wide input voltage range of 2.5:1
- The pick-up current and the holding current can be set separately, and the contactor coil design is simpler
- With built-in analog frequency jitter to solve EMI problems easily
- With fast shutdown function to reduce the contactor shutdown delay
- Suitable for various contactor power saving transformation

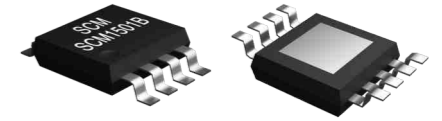


Product Program


Model Number	Vcc(V)	F _{BUCK} ¹	Fast Shutdown Function	V _{ACT_AC} ²	V _{OFF_AC} ³	Package
SCM1501B	16.5-500	23.5kHz	√	2.4V	1.6V	ESOP-8
SCM1502A	7-40	23.7kHz	√	0.8V	0.6V	ESOP-8

Note: 1. Post-stage average switching frequency
 2. VT pin contactor operating voltage
 3. VT pin contactor turn-off voltage

Typical Application Circuit

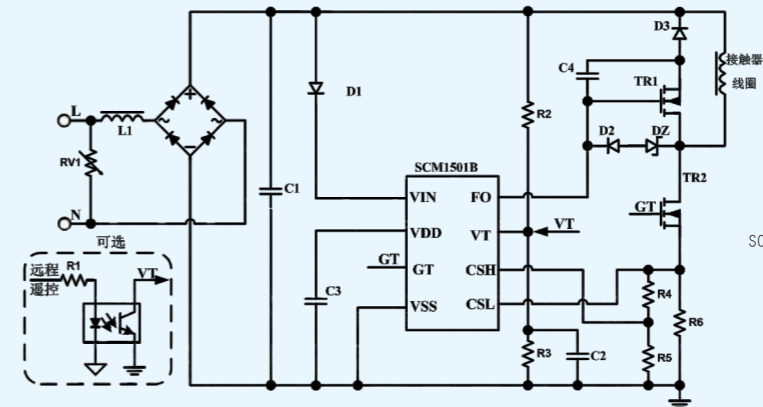

SCM1501B Application Diagram

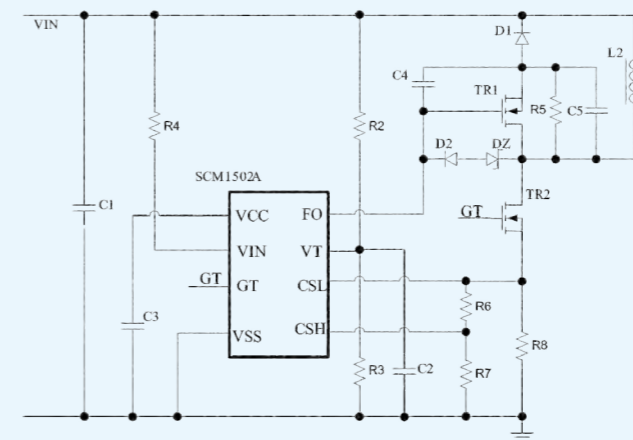

SCM1502A Application Diagram

AC/DC transformer

RoHS

Features


- Input voltage range: 85-264VAC/85-305VAC
- Operating temperature: -40°C to +110°C
- Package: SMD/SIP
- Meet UL/EN62368 standards



Model Number	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (mA)	Auxiliary Voltage (VDC)	Auxiliary Current (mA)	Typical Power (W)	Typical Operating Frequency (kHz)	Certification
TTLS03-15B05T	85-305	5	600	18.65	20	3	65	RoHS
TTLS03-15B12T	85-305	12	250	17.76	20	3	65	
TTLDE05-20B05D	85-264	5	1000	25.00	20	5	65	
TTLDE05-20B12D	85-264	12	420	18.36	20	5	65	
TTLHE10-20B05D	85-264	5	2000	20.00	20	10	65	
TTLHE10-20B12D	85-264	12	900	18.36	20	10	65	
TTLHE20-20B12D	85-264	12	1600	19.20	20	20	65	
TTLHE25-20B12D	85-264	12	2100	19.68	20	25	65	

Schematic


TTLS03-15B-T Series



Turns Ratio	TTLS03-15B05T	TTLS03-15B12T
N1: N2: N3	11.45: 1: 3.73	5.04: 1: 1.48

Note: Input: N1, output: N2, auxiliary: N3.


TTLDE05-20B-D Series



Turns Ratio	TTLDE05-20B05D	TTLDE05-20B12D
N1: N2: N3	18.00: 1: 5.00	8.40: 1: 1.53

Note: Input: N1, output: N2, auxiliary: N3.


TTLHE10-20B-D Series



Turns Ratio	TTLHE10-20B05D	TTLHE10-20B12D
N1: N2: N3	15.38: 1: 4.00	7.24: 1: 1.53

Note: Input: N1, output: N2, auxiliary: N3, shield: 2-NC.

TTLHE20-20B-D Series




Turns Ratio	TTLHE20-20B12D
N1: N2: N3	6.00: 1: 1.60

Note: Input: N1, output: N2, auxiliary: N3, shield: 4-NC.

Schematic

TTLHE25-20B-D Series




Turns Ratio	TTLHE25-20B12D
N1: N2: N3	7.82: 1: 1.64

Note: Input: N1, output: N2, auxiliary: N3, shield: 5-NC.


Package Dimension

TTLS03-15B-T Series LxWxH: 21.90x14.00x7.20(mm)

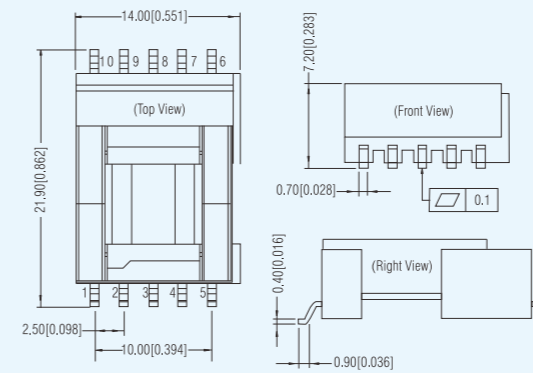


Unit: mm[inch]
General tolerance: ±0.50[±0.020]

TTLDE05-20B-D Series LxWxH: 10.50x18.30x11.20(mm)

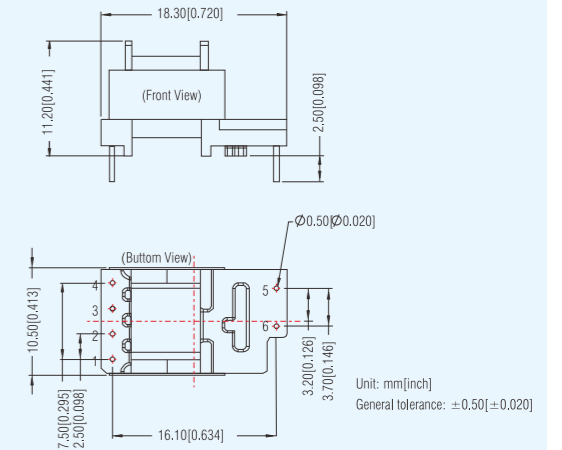


Unit: mm[inch]
General tolerance: ±0.50[±0.020]

TTLHE10-20B-D Series LxWxH: 15.50x17.10x10.50(mm)





Unit: mm[inch]
General tolerance: ±0.50[±0.020]





Package Dimension

TTLHE20-20B-D Series LxWxH: 20.50x26.80x13.70(mm)

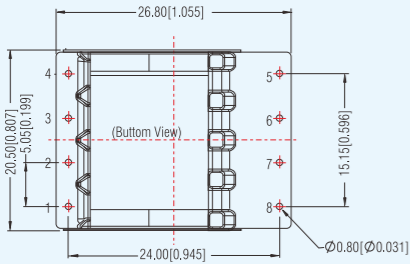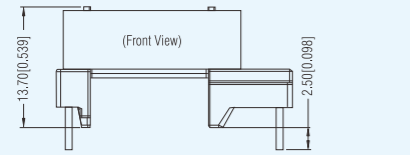

Unit: mm[inch]
General tolerance: ±0.50[±0.020]

TTLHE25-20B-D Series LxWxH: 25.90x31.30x16.00(mm)

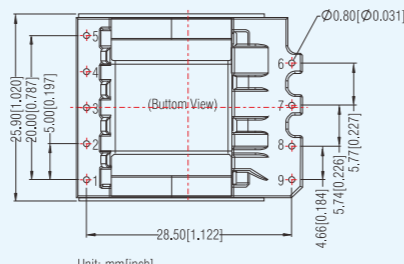

Unit: mm[inch]
General tolerance: ±0.50[±0.020]



Features


- Input voltage range: 4:1
- High saturated flux density
- Isolation voltage: 1650VDC
- SMD package
- Operating temperature: -40°C ~ +125°C
- Meet EN62368 standards

Product Program

Model Number	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (mA)	Auxiliary Voltage (VDC)	Auxiliary Current (mA)	Typical Power (W)	Isolation (VDC)	Certification
TTURB2405-6T	9-36	5	1200	11.6	50	6	1650	RoHS
TTURB2405-10T	9-36	5	2000	11	50	10	1650	
TTURB4805-10T	18-75	5	2000	11.25	50	10	1650	
TTURA2415-10T	9-36	±15	±334	12.5	50	10	1650	
TTURA4805-10T	18-75	±5	±1000	11.25	50	10	1650	
TTURB2405-20T	9-36	5	4000	11.67	50	20	1650	


Schematic

TTB05xx-1T Series




Output voltage(VDC)	Turns Ratio(Np: Ns)	
	Np-a: Ns-a	Np-b: Ns-b
5	1: 1.1 (Typ.)	
9	1: 1.94 (Typ.)	

TSHT Series




TTURB-20T Series



Turns Ratio	TTURB2405-20T
N1 : N2 : N5 : N6 : N3 : N4	2.33 : 2.33 : 1.33 : 2.33 : 1 : 1

Note: input: N1/N2 in parallel; output: N3/N4 in parallel; drive: N5; auxiliary: N6.

TTURA/B-6/10T Series



Turns Ratio	TTURB2405-6T	TTURB2405-10T	TTURB4805-10T	TTURA2415-10T	TTURA4805-10T
N1 : N4 : N2 : N3	1.67 : 2.33 : 1 : 1	1.6 : 2.2 : 1 : 1	4 : 2.25 : 1 : 1	0.67 : 0.83 : 1 : 1	3.5 : 2.25 : 1 : 1

Note: input: N1; single output: N2/N3 in parallel; dual output: N2/N3 in series; auxiliary: N4.

DC/DC transformer

Features

- Isolation voltage: 1650VDC/3000VDC
- Compact SMD package
- Operating temperature: -40°C to +125°C
- Meet EN62368 standards

RoHS




Product Program


Model Number	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (mA)	Auxiliary Voltage (VDC)	Auxiliary Current (mA)	Typical Power (W)	Isolation (VDC)	Certification
TTB0505-1T	4.5-5.5	5	200	/	/	1	1650	RoHS
TTB0509-1T	4.5-5.5	9	111	/	/	1	1650	
TSHT5.8-01	4.5-5.5	5	250	/	/	1	3000	

Package Dimension


TSHT Series LxWxH: 12.50x8.70x5.90(mm)

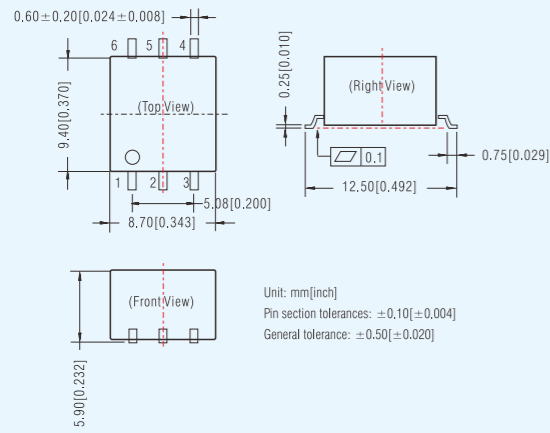


TTB05xx-1T Series LxWxH: 8.80x6.50x3.60(mm)

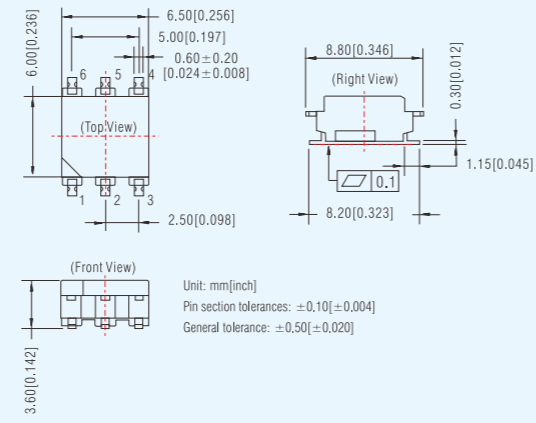

TTURA/B-6/10T Series LxWxH: 12.20x11.00x5.90(mm)

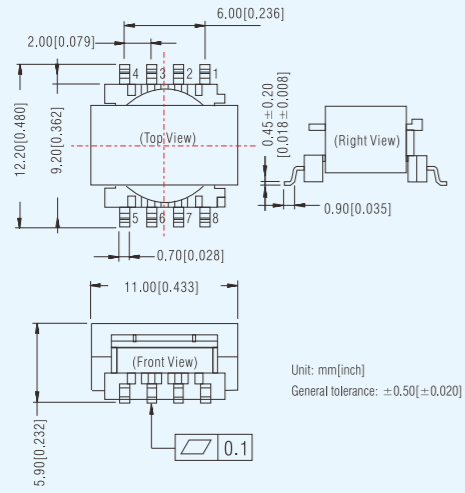

TTURB-20T Series LxWxH: 16.00x14.70x6.80(mm)

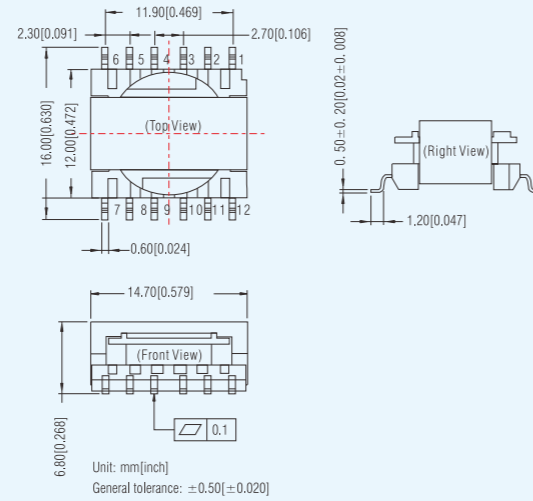

Wide input DC/DC transformer for automotive

RoHS

Features

- Input voltage range: 4:1
- High saturated flux density
- Isolation voltage: 1650VDC
- SMD package
- Operating temperature: -40°C to +125°C
- Meet EN62368 standards
- Meet AEC-Q200 standard




Product Program

Model Number	Input Voltage (VAC)	Output Voltage (VDC)	Output Current (mA)	Auxiliary Voltage (VDC)	Auxiliary Current (mA)	Typical Power (W)	Isolation (VDC)	Certification
CTTURB2405-6T	9-36	5	1200	11.6	50	6	1650	RoHS
CTTURB2405-10T	9-36	5	2000	11	50	10	1650	
CTTURB4805-10T	18-75	5	2000	11.25	50	10	1650	
CTTURA2415-10T	9-36	±15	±334	12.5	50	10	1650	
CTTURA4805-10T	18-75	±5	±1000	11.25	50	10	1650	
CTTURB2405-20T	9-36	5	4000	11.67	50	20	1650	

Schematic


CTTURA/B-6/10T Series



Turns Ratio	TTURB2405-6T	TTURB2405-10T	TTURB4805-10T	TTURA2415-10T	TTURA4805-10T
N1 : N4 : N2 : N3	1.67 : 2.33 : 1 : 1	1.6 : 2.2 : 1 : 1	4 : 2.25 : 1 : 1	0.67 : 0.83 : 1 : 1	3.5 : 2.25 : 1 : 1

Note: input: N1; single output: N2/N3 in parallel; dual output: N2/N3 in series; auxiliary: N4.

CTTURB-20T Series




Turns Ratio	TTURB2405-20T
N1 : N2 : N5 : N6 : N3 : N4	2.33 : 2.33 : 1.33 : 2.33 : 1 : 1


Note: input: N1/N2 in parallel; output: N3/N4 in parallel; drive: N5; auxiliary: N6.

Package Dimension

CTTURA/B-6/10T Series LxWxH: 12.20x11.00x5.90(mm)

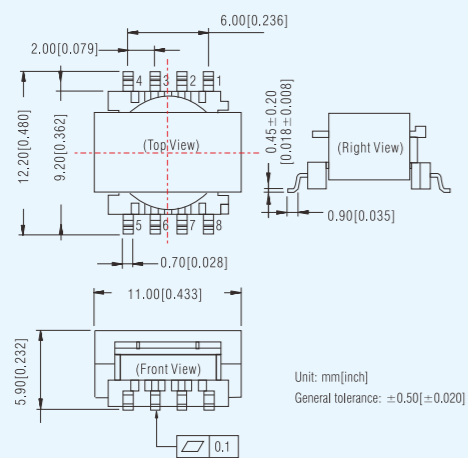

CTTURB-20T Series LxWxH: 16.00x14.70x6.80(mm)

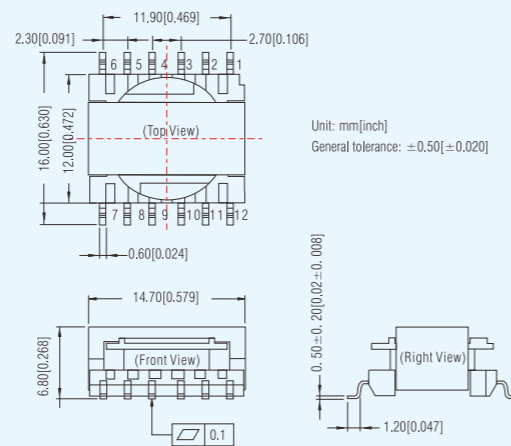

Fixed input DC/DC transformer for automotive

RoHS

Features

- Compact SMD package
- I/O isolation test voltage 3000VAC/4250VDC
- Operating temperature: -40°C to +125°C
- Meet EN62368 standards
- Meet AEC-Q200 standard




Product Program

Model Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (Max.)(mA)	Power (W)	Isolation	Certification
CTTFB0505-1T	4.5-5.5	5	200	1	3000VAC/4250VDC	RoHS
CTTF0505-1T	4.5-5.5	5	177AC/250DC	1	3000VDC	


Schematic

CTTFB0505-1T / CTTF0505-1T




Package Dimension

CTTFB0505-1T LxWxH: 8.80x6.50x3.60(mm)

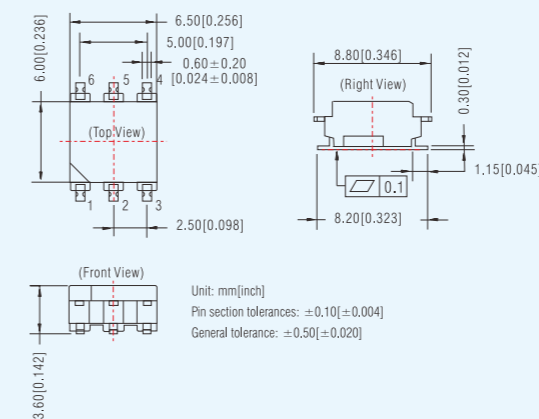

CTTF0505-1T LxWxH: 12.50x8.70x5.90(mm)

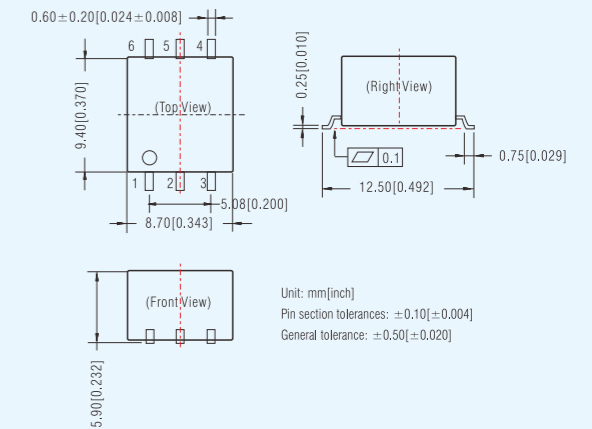

Purpose:


To prevent potential safety problems while using the products.

Scope:

AC/DC, DC/DC, EMC Auxiliary Device, Isolation Transmitter, LED Driver and IGBT Driver manufactured by Mornsun Guangzhou Science & Technology Co., Ltd.

Contents:

Users should comply to all the contents of Product Datasheet carefully before selection, design, or production, and design and use the products according the requirements of Product Datasheet.

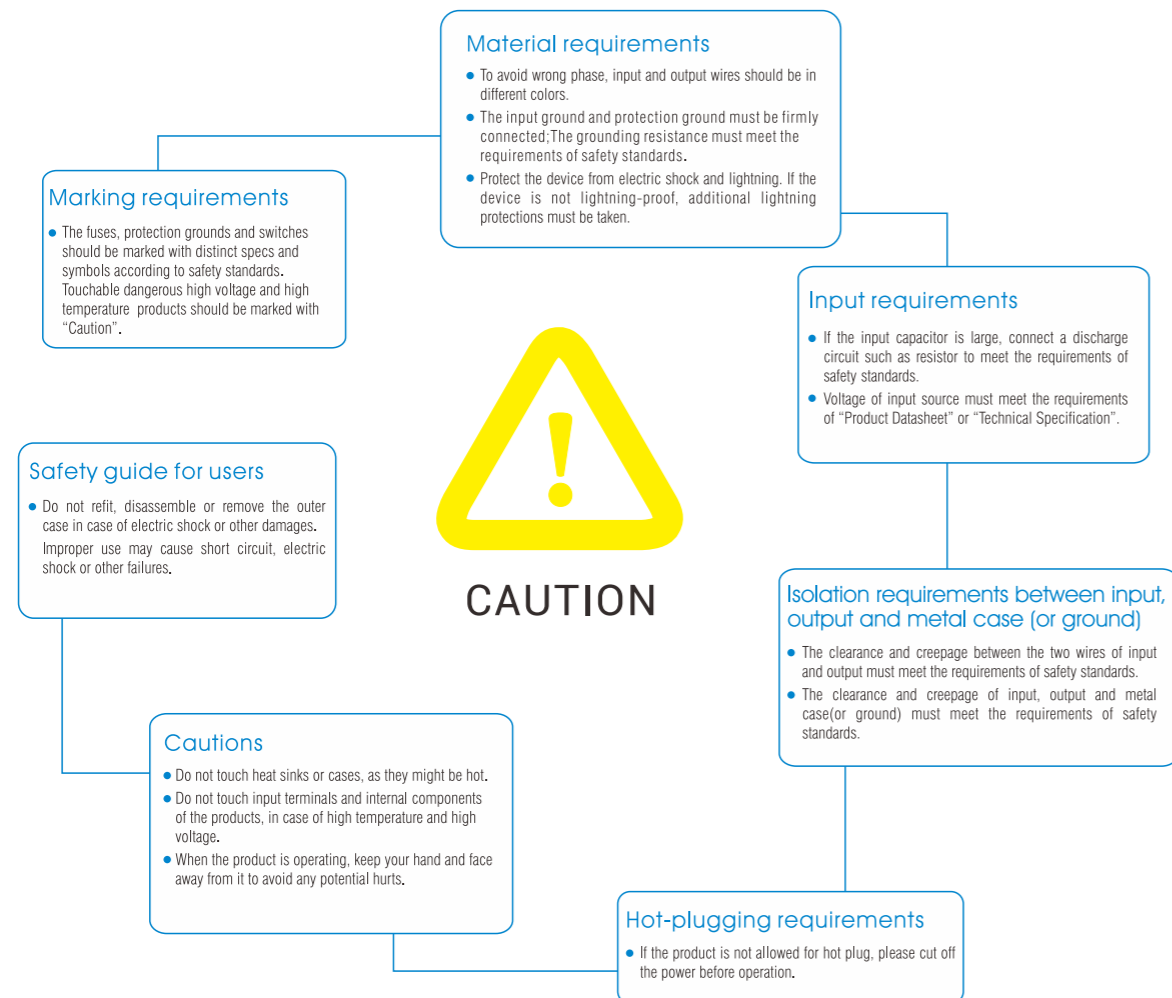


More information about application, please contact us.

Tel: 020-38601850 E-mail: fae800@mornsun.cn

DC/DC Converter testing suggestions

After selecting the right converter based on input and output requirements, the correct testing method must be used to ensure and verify specified performance parameters. The following are suggested test methods and test equipment requirements.

Test conditions: ambient temperature $T_A = 25^\circ\text{C}$
humidity $< 75\%$, rated input and rated load.

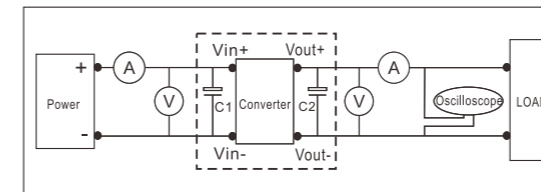

The model contains:

- DC adjustable regulated power supply : output voltage range is suitable for DC/DC converter under testing.
- current meter A : accuracy 0.001A
- voltage meter V: accuracy 0.001V
- load resistance: rated load: $U \cdot U/P$
light load: $10 \cdot U \cdot U/P$
- wire: less wire loss is required. It is recommended to use 1mm multistand copper wire, which avoids over voltage drop.

Test:

A: Wire

The proper wire shall be selected as described above. Smaller wire will result in potential errors in the test of efficiency and regulation parameters. Ensure all mechanical and solder connections are sound as this will also result in errors.

B: Grounding

Improper grounding may cause unintended noise to the circuit. When testing ripple and noise, it is recommended to use a single pole test method to measure.

C: Load

To ensure valid test data, the testing load of unregulated products should be within 10~100% of the rated output current/power. It can test unregulated products at no load, but should be aware that the voltage accuracy is not specified at this load level.

1) Input voltage accuracy:

Set input voltage at nominal value and output at rated load, then mark the testing output voltage as V_{out} and the nominal output voltage as V_{nom} . The formula:

$$\frac{V_{out} - V_{nom}}{V_{nom}} \times 100\%$$

e.g: For regulated products IB1212LS-1W, the nominal input voltage is 12V, and rated load is 144Ω . The output voltage reads 12.039V.

$$\frac{12.039\text{VDC} - 12.000\text{VDC}}{12.000\text{VDC}} \times 100\% = 0.325\%$$

2) Line regulation:

Isolated regulated series:

Line regulation equals difference ratio between max. and min. output voltage, when adjusting input voltage within its limitation at full load:

$$\text{Line regulation} = \frac{V_{OUTN} - V_{MDEV}}{V_{OUTN}} \times 100\%$$

V_{OUTN} --- output voltage at nominal input voltage and rated load
 V_{OUTH} --- output voltage when input voltage at its upper limit
 V_{OUTL} --- output voltage when input voltage at its lower limit
 V_{MDEV} --- V_{OUTH} or V_{OUTL} Which is deviated from V_{OUTN} more

Fixed input, isolated unregulated series:

$$\text{Line regulation} = \left| \frac{\Delta V_{OUT}}{\Delta V_{IN}} \right|$$

$$\Delta V_{OUT} = \frac{V_{OUT+10\%} - V_{OUT-10\%}}{V_{OUTNOM}} \times 100\%$$

$$\Delta V_{IN} = \frac{V_{IN+10\%} - V_{IN-10\%}}{V_{INNOM}} \times 100\%$$

In the formula:

$V_{IN+10\%}$ ---nominal input voltage and add 10% as its upper limit
 $V_{IN-10\%}$ ---nominal input voltage and minus 10% as its lower limit
 $V_{OUT+10\%}$ ---output voltage at full load when input voltage at its upper limit
 $V_{OUT-10\%}$ ---output voltage at full load when input voltage at its lower limit
 V_{INNOM} ---nominal input voltage
 V_{OUTNOM} ---output voltage at full load and nominal input voltage

e.g.: If B0505LS-1W connects a 25Ω resistive load, input voltage range will be $\pm 10\%$ (4.5V~5.5V).

$$V_{IN+10\%} = 5.5\text{V}; V_{IN-10\%} = 4.5\text{V}; V_{INNOM} = 5\text{V}$$

$$V_{OUT+10\%} = 5.32\text{V}; V_{OUT-10\%} = 4.2\text{V}; V_{OUTNOM} = 4.77\text{V}$$

$$\text{Then: } \Delta V_{OUT} = \frac{5.32\text{VDC} - 4.2\text{VDC}}{4.77\text{VDC}} \times 100\% = 23.5\%$$

$$\Delta V_{IN} = \frac{5.5\text{VDC} - 4.5\text{VDC}}{5\text{VDC}} \times 100\% = 20\%$$

$$\text{Line regulation} = \left| \frac{\Delta V_{OUT}}{\Delta V_{IN}} \right| = 1.174$$

3) Load regulation:

Isolated regulated series:

As the input voltage is rated, connect 10% and 100% constant resistance load and then test the values at 10% load and full load. Next, compare the two values with the rated value and calculate the differences.

$$\text{Load regulation} = \frac{V_{b1}(V_{b2}) - V_{bo}}{V_{bo}} \times 100\%$$

V_{bo} —setting value of output voltage;
 V_{b1} —output voltage at minimum output current;
 V_{b2} —output voltage at nominal output current;

Fixed input, isolated unregulated series:

$$\text{Load regulation} = \frac{V_{OUTNL} - V_{OUTFL}}{V_{OUTFL}} \times 100\%$$

V_{OUTNL} —output voltage at 10% load

V_{OUTFL} —output voltage at full load

e.g: Fixed input product B0505XD-1W offers rated load $U^2/P=25 \Omega$. At 10%~100% load, they read

$$V_{OUTNL} = 5.29 \text{ V}; V_{OUTFL} = 4.77 \text{ V}$$

$$\text{load regulation} = \frac{5.29\text{VDC} - 4.77\text{VDC}}{4.77\text{VDC}} \times 100\% = 10.9\%$$

4)Efficiency:

The ratio between input power and output power at rated input and rated load.

$$\text{Efficiency} = \frac{I_{OUT} \times V_{OUT}}{I_{IN} \times V_{IN}} \times 100\%$$


e.g.: IB1212LS-1W offers 12V rated input and 12.039V output at full load. When current is 83.3mA, input current is 115.0mA.

$$\text{Efficiency} = \frac{0.0833\text{A} \times 12.039\text{V}}{0.1150\text{A} \times 12.000\text{V}} \times 100\% = 73\%$$

5)Ripple and noise:

Ripple and noise is the AC component at the DC output, which affects output accuracy. We usually measure the peak to peak value(mVp-p) of ripple and noise with parallel method.


As the figure shows:

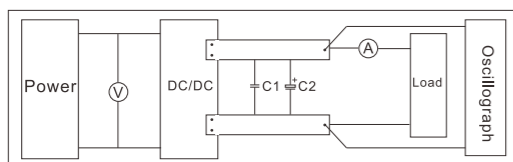

Notes: 1. C1 is a ceramic capacitor.

2. C2 is a capacitor suitable for the fixed input product. Please refer to datasheet for details. For wide input product, C2 should be 10uF electrolytic capacitor that has a higher withstanding voltage than module's output voltage.

As the DC/DC converter output end/side may contain high-frequency harmonics, and the common mode rejection ratio of most scopes is not so good, it is best to not use the ground wire provided on most probes. Attach the ground sleeve as shown in the figure above.



Tall, high frequency spikes are normally noise, and smaller lower frequency plots are generally ripple.


6)Start-up time:

Start-up time is the time once the input voltage is present and within the specified range, the time it takes for the output of the converter to rise between 10% and 90% of its nominal value. This is usually tested and specified with a resistive load only. Other factors such as additional output capacitance added by the customer may effect this time.

7)Isolation and insulation characters:

Isolation is one of the most important parameters of a DC/DC converter. Depending on the application, isolation are typically between 1KV and 6KV depending on the DC/DC converter series. Here is isolation circuit drawing.

Isolation equivalent circuit:

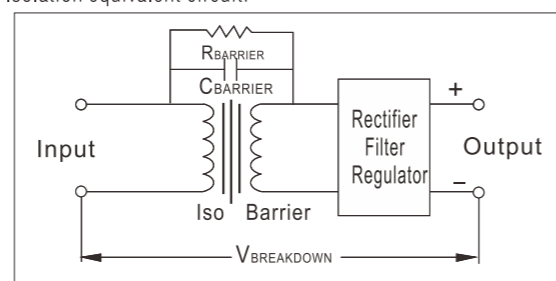

$$I_{LEAKAGE} = \frac{V_{BREAKDOWN}}{R_{BARRIER}} = 2 \pi (60\text{Hz})(C_{BARRIER})(240\text{V})$$

$C_{BARRIER}$: Isolation capacitance; coupled between primary and secondary windings

$R_{BARRIER}$: Isolation resistance: DC resistance between input and output.

$I_{LEAKAGE}$: Leakage current; the current as a result of the input/output capacitance.

$V_{BREAKDOWN}$: Test voltage. It is usually 240VAC/60HZ.

$$Z_f = \frac{1}{j 2 \pi f C_{IS}} \quad I_L = \frac{V_{test}}{Z_f}$$

C_{IS} : Isolation capacitance f : frequency V_{test} : test signal voltage

In general, DC/DC converters are constructed to minimize Isolation Capacitance, and therefore minimize Leakage Current.

For isolation testing,

Isolation, dielectric strength test: test 1 min., input/output (at AC/DC specified peak value)

Insulation resistance test: the value should be above 1GOhm when applying 500VDC from input/output

Note: MORNSUN's G and H series products offer extremely low isolation capacitance (TYP: 10PF) and they are suitable for medical application.

1.Foreword

The following guidelines should be carefully read before using the converter. Improper use may result in the risk of electric shock, damaging the converter, or catching fire.

1) Risk of Injury

- Do not touch the heat sink or the converter's case to avoid the risk of burns,
- Do not touch the input terminals or the internal components, which may result in electric shock or burns.
- Keep hands and face away to avoid potential injury during improper operation, when the converter is in operation.

2)Installation Advice

- Please make sure the input terminals and signal terminals are properly connected in accordance with the instruction in the datasheet.
- Install a slow blow fuse at input of the converter to ensure safe operation and meet safety standard requirements.
- Installation and use of AC/DC converters should be handled by well trained operator.
- AC/DC converters should be installed in compliance with safety standard in the primary transmission stage of a design.
- Please ensure that the input and output of the converter are incorporated into the design out of the reach of the end user. The end product manufacturer should also ensure that the converter is protected from being shorted by any service engineer or any metal filings.
- The application circuits and parameters shown are for reference only. All parameters and circuits should be verified before completing the circuit design.
- These guidelines are subject to change without notice; please visit our website for details.
- It is a normal phenomenon if there is slight noise when the module operates under no-load and light-load conditions.
- Please refer to AC/DC Converter Common Faults Analysis for other questions.

2. Selection guide of AC/DC converter

Firstly confirm the specifications of power supply, select the module according to the required parameters, and determine to use standard module or require customization.

Step 1: Confirm the type of power supply input.

Check that the input is AC source or DC source; AC source should use AC/DC converters, and DC source should use DC/DC converters.

Step 2: Select the standard module voltage according to the input voltage range.

Step 3: Select the power and package type of the product according to the load.

Optional packages: Single in-line (SIP), double in-line (DIP), common chassis mounting, mini-type chassis mounting and DIN-Rail (DIN). LD/LB/LH series (except for LH40,LH60) suffixed with A2 indicates the chassis mounting, and with A4 indicates the Din-Rail mounting. For example, LH15-10B05A2 is in chassis mounting package.

Step 4: Select the suitable output voltage according to the load type.

The output voltages of MORNSUN products are usually 3.3 V, 5 V, 9 V, 12 V, 15 V, 24 V, $\pm 5 \text{ V}$, $\pm 12 \text{ V}$ and $\pm 15 \text{ V}$.

Step 5: Select the isolation voltage.

The isolation of the module requires the input and output to be separated into two isolated circuits (separate ground connection).

In industrial power bus system, isolation ensures the safety in harsh circumstances (lightning, arc interference), also eliminate ground loops. In hybrid circuits, the noise isolation between sensitive analog circuit and digital circuit can be achieved. In the multi-voltage power supply system, the voltage conversion can be implemented. The isolated voltage of MORNSUN AC/DC converters are 2500VAC, 3000VAC and 4000VAC.

In conclusion, standard converters are suitable for cost-effective, mature technology, less development difficulty and shorter development period, etc. For high isolation, extra wide voltage input range, high temperature environment, EMC certification, UL certification and other special requirements, it would be better to consult the technicians.

3.General AC/DC Converter Applications

Basic Application Circuit

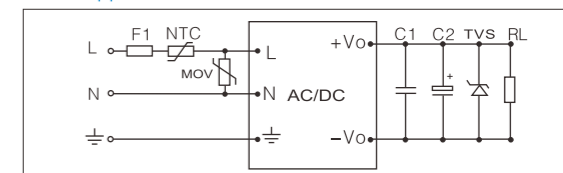


Figure 1. General AC/DC converter applications circuit

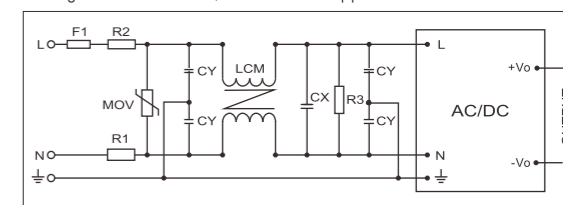


Figure 2. Typical input EMC filtering circuit

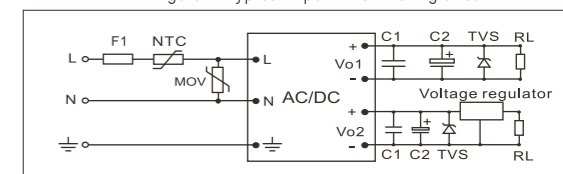


Figure 3. Typical application circuit

1)F1: refers to the input fuse. Proper fuse selection should be a safety agency approved, slow blow fuse. Selection of the proper fuse rating is necessary to ensure power converter and system protection (potential failure if the rating is too high) and prevent false fuse blowing (which could happen if the rating is too low). Below is the formula to calculate the proper rating:

$$I = 3 \times V_{o1} \times I_{o1} / \eta / V_{in(\min)}$$

V_{o1} --output voltage; I_{o1} --output current;

η --efficiency of the converter ;

$V_{in(\min)}$ --the minimum input voltage.

- 2) NTC: a thermistor. It is suitable for AC/DC converter modules, and is optional. If the application is sensitive to surge current, a winding resistor at 5~10 Ω is recommended.
- 3) R1 & R2: 2 /3W winding resistance is applied to the power modules under 25W, 2 /5W winding resistance is applied to the power modules more than 25W.; R3: 1M Ω /3W winding resistor.
- 4) MOV: protects the converter from damage of lightning or surge current.
- 5) CX & CY: safety capacitors.
- 6) LCM: common-mode inductor, is recommended to 10mH~30mH.
- 7) C1: a high frequency ceramic capacitor or polyester capacitor, 0.1 μ F/50V.
- 8) C2: an output filtering high frequency electrolytic capacitor. Output-filtration high-frequency aluminum electrolytic capacitor, please refer to datasheet for details.
- 9) TVS: is recommended to protect back-end circuit in case of the module abnormality.

For dual or triple outputs converters, the circuit of input side remains the same and the outputs should be considered independently in component selection. The application circuit shown in Figure 1 is typical application circuit. If the place that is strict with EMC, such as electricity or outdoor applications, more filtering measures are needed. Therefore, the product in Figure 2 (for your reference) is suitable for a typical input EMC filtering circuit.

For multi-output converters, the main output is typically a fully regulated output. If the end application requires critical regulation on the auxiliary output, a linear regulator or other regular should be added after the converters. As shown in Figure 3. (Note: MORN SUN partial products have built-in linear regulators, please contact our technical department for details)

4. Safety design for application of AC/DC converter

1) Marking requirements

The fuse, protection ground terminal and switch shall be marked symbols in accordance with SAFETY REQUIREMENT, and the danger warning signs shall be affixed to the accessible dangerous voltage and energy.

2) Material requirements

The L, N and \oplus wires of input shall be in brown, blue and chartreuse respectively. For the equipment which prevents the electric shock through basic insulation and protection ground terminal (Class I equipment), the ground wire in chartreuse must be grounded well, and the grounding resistance shall be lower than 0.1 Ω .

3) Clearance and Creepage distance

Make sure that in Class I and Class II application environment, the clearance of L and N before fuse must be in accordance with the reinforced insulation requirement of SAFETY REQUIREMENT; and after fuse, it must meet the basic insulation requirement of SAFETY REQUIREMENT.

4) Capacitance on the input terminal

If CX capacitance of input terminal is too high, the discharge resistor shall be connected to make sure when the plugs or the connectors disconnected, the retention voltage between L and N input terminal shall drop to less than 37% of the maximum within 1s.

5. Common questions

1) Grounding – input and output

Input grounding: Normally there are three pins on the input terminal of AC/DC Converter: Live wire L, neutral wire N and protection ground terminal \oplus ; \oplus is usually connected to the equipment casing or the ground wire in the power grid. Output grounding: In the actual application, some customers connect the output ground terminal with the protection ground terminal directly, as shown in Fig. 4 below. Such connection may result in abnormal output or damage of the module because of lightning, surge and group pulse, etc., so it is recommended to connect the output ground terminal with the protection ground terminal through a Y capacitor (1000 pF/400 V is normally recommended), as shown in Figure. 1.

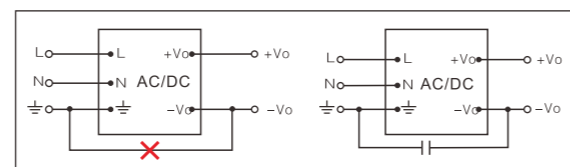


Figure. 1. Connecting method of output and protection grounding

2) Surge current

The surge current is classified into the spike current at start time and the current formed by the high surge voltage sensed during operation. For the spike current, we mainly add protective apparatus as thermistor or wire wound resistor on the input terminal to reduce the surge current; for the surge current produced by the high voltage, we mainly use the piezoresistor for protection and to release

the energy.

3) Leakage current

There are two kinds of leakage currents: 1. the leakage current between the input terminal and the protection ground terminal when the product operates normally; 2. the leakage current between the isolation belts when the product is in the pressure withstanding test.

4) AC/DC input


Usually the full-bridge rectifier is used on the input terminal of AC/DC power supply to meet the AC and DC power supply requirements.

5) Relations between the Class I, II equipments and the protection ground terminal FG

EN60950 clearly defines the Class I and II equipments: Class I equipment is provided with the basic insulation and a connecting device capable of connecting the conductive part with dangerous voltage to the protection grounding conductor in case of the basic insulation failure. Class I equipment is also equipped with the protection ground terminal FG pin, such as LH-series product. Class II equipment means the equipment which electric shock prevention depends on both the basic insulation and the additional safety protection measure (for example the equipment with dual insulation or enhanced insulation). Such equipment does not rely on the protection grounding or the protection measures of mounting condition. Class II equipment has no protection ground terminal FG pin, such as LS/LD-series product.

6) Transient change of input

The transient voltage change of the input power wire may destroy the power converter. If the transient voltage change on the input terminal is higher than the limit of the input of the module, the protection circuit as shown in fig. 5 must be connected at the input terminal.

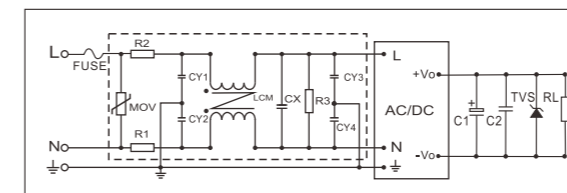

7) No-load use of output

For the multi-output product, output voltage may be 20% or more higher than the nominal at no-load. In actual application, it is recommended to ensure the minimum load (10% load).

8) Operating temperature

When the product operates in a high temperature

environment, the temperature of its internal components will be much higher than the ambient temperature. In order to ensure the reliable operation of the module, the maximum operating ambient temperature of the conventional product is 70°C, and derating is required when the ambient temperature is higher than 55°C. When the product operates in a low temperature environment, the power derating is also required because of the low-temperature characteristics of internal electrolytic capacitor and other components. Moreover, the output ripple and the noise are higher than that of constant-temperature value. For the specific contents of derating curve, please refer to datasheet for details.

9) Voltage marked on product's screen print

The mark on the product's screen print is 100VAC-240VAC. But why it is 85VAC-264VAC on the datasheet? It is mainly because of the consideration of safety certification. During test, the certification authority usually tests the product performance according to the input voltage on the product's screen print $\pm 10\%$ and $\pm 15\%$. So in this industry, the input voltage on the screen print usually is 100VAC-240VAC.

1. Selection guide of DC/DC Converter

1) Confirmation of specifications of power supply module

Firstly confirm the specifications of power supply, select the module according to the required parameters, and determine to use standard module or require customization.

Step 1: Confirm the demission

Sufficient space is required for power module's radiating, which affects the interference of signal acquisition and performances of other circuit components. The volume, cost, and reliability of the modules should be taken into overall consideration.

Step 2: Select the isolation voltage.

The isolation of the module requires the input and output to be separated into two isolated circuits (separate ground connection). In industrial power bus system, isolation ensures the safety in harsh circumstances (lightning, arc interference), and eliminates ground loops; in hybrid circuits, the noise isolation between sensitive analog circuit and digital circuit can be achieved; in the multi-voltage power supply system, the voltage conversion can be implemented. Selecting proper isolation products according to different applications ensures the operation and avoids the budget waste in over-design.

Step 3: Confirm the type of power supply input

Identify the input source is AC or DC; AC source should use AC/DC converters, and DC source should use DC/DC converters.

Step 4: Confirm the output current

After the load is selected, the output current is basically determined; the magnitude of load current is the key to the determination of power and directly affects the reliability and price of the module. The power converter is preferably applied under 30%-80% of the full load; selecting appropriate output current is one of the key factors for successful design, excessively large and small current will result in low reliability and high cost.

In general application, it is to be noted that: if the application is for supplying power to optical coupler and relay or for voltage reference of RS232/485 and CAN (Controller Area Network) buses, light load or no load application may exist, in such case, it is recommended to add appropriate dummy load. In case the load is extremely unstable or the load variation, the selection of dummy load shall be within the range of 10%-100%, in order to avoid under-load or over-load application. Under high temperature condition, the power converters shall be used in derating. Please refer to the Temperature Derating Curve. As for the application under high temperature condition or poor heat dissipation condition, the converter with large volume is preferred; as for the case of long term operation above 70°C, please consult our technicians to select the suitable power converters for the exact operation.

Step 5: Confirm the input voltage range

1) As for input voltages 3.3V, 5V, 9V, 12V, 15V and 24V with variation range of $\pm 10\%$, A, B, D, E, F, G and H series products with unregulated voltage outputs are available. As for input voltages with variation range of $\pm 5\%$, IA, IB, IE and IF series products with regulated voltage outputs are available. Others are switching power supplies, LDO, voltage stabilizing diodes and other power supplies with relatively stable outputs.

2) As for input voltages 5V (4.5-9V), 12V (9-18V), 24V (18-36V) and 48V (36-75V) with variation range of 2:1, WR and VR series products are available. As for input voltages of 24V (9-36V), 48V (18-75V) and 110V (40-160V) with variation range of 4:1, PW and UR series products are available. For example, in the cases of 24V industrial bus power supply, 48V communication bus power supply, 110V railway power supply, 220V transformer rectifier output and various types of storage battery, accumulator, lithium battery, dry battery, remote transmission, etc. with large output voltage variations, PW and UR series modules with wide voltage outputs are available. As for the output powers above 3W, it is recommended to select VR or UR input series power converters in order to improve the overall efficiency.

Step 6: Confirm the load type

1) The output voltage depends on the type of load circuit, for example: in the cases of ordinary digital circuits, amplified direct current or low-frequency signal operational amplifiers, RS232/485 and CAN buses, etc. which without high requirements on accuracy of power supplies, the converters with unregulated voltage outputs are available. (e.g. A, B, D, E, F, G and H series modules). As for the sensors, high-accuracy operational amplifiers, A/D and D/A chips and other devices which are more sensitive to the accuracy and ripple of power supplies, the products with regulated voltage outputs (e.g. IA, IB, IE and IF series products, or VR, WR, PW and UR series products) are available.

2) In the case where both the cost and efficiency shall be taken into consideration, combined use of unregulated voltage output converters (e.g. A, B, D, E, F, G and H series modules) and linear regulator can be considered; when the load has positive/negative voltage or multi-voltage supply demand, the module with positive/negative voltage or using dual-circuit/multi-circuit outputs can be considered; the number of circuits shall be minimized; in the application, the circuit with large output power and high accuracy requirement shall be used as main output, and the secondary voltage accuracy requirement shall be determined, in order to allow the converter design to meet the requirements more

reliably.

3) The common specifications of output voltage are 3.3V, 5V, 9V, 12V, 15V, 24V, $\pm 5V$, $\pm 12V$ and $\pm 15V$, etc.

4) Excessively high requirements on output accuracy and ripple may cause significant rise of the cost of converters. In conclusion, standard converters are suitable for cost-effective, mature technology, lower development resistance and less development time, etc. For high isolation, extra wide voltage input range, high temperature environment, EMC certification, UL certification and other special requirements, it would be better to consult the technicians.

2) System Power Distribution Design

The design of system power distribution usually has to be optimized for several times according to product characteristics and circuit demands. Accurate measurement of actual circuit operation parameter and environment change range is helpful for us to select the most suitable power converter.

Step 1: External factors

Ambient temperature has certain effects on power converters and the external components. In the application, the power converters may be in an environment with high temperature, low temperature or temperature cycle (e.g. engine room, cabin, etc.). Therefore, we shall have a detailed understanding of the changes of relevant parameters of power converters during changes of environmental conditions, in order to ensure that the requirements of power converters are available in actual environment. It is to be noted the ambient temperature for operation of power converters is not the air temperature at that time but the spatial temperature in the casing of equipment. As there are many heating devices, the temperature in the casing is usually higher than the air temperature. The temperature range is required to be 0~70°C for commercial products, -40~85°C for industrial products, -40~105°C for vehicle onboard equipment, -55~85°C for field operation equipment and -55~125°C for military domain. Sufficient margin shall be considered in design, especially for the converter which is greatly derated in high temperature. And it is preferred to select the electrolytic capacitor with better high/low temperature characteristics. Under high temperature condition, the withstanding voltage of capacitor will reduce significantly, and the capacitor shall be used correctly according to its Specification Manual.

In the environment with interferences such as electric arc, electrostatic discharge, unstabilized alternating current grid, starting switch, relay and lightning stroke, the input voltage and current may far exceed the withstanding capacity

of module, causing permanent damage of module and breakdown of load circuit. In this case, protective circuit shall be provided to ensure the safe operation of power supply.

Transmission distance also has effects on the power supply of system, so following points shall be paid attention to during the model selection:

1) Small temperature difference and small interference, non-isolation or small power converter is generally used in the case of short indoor wire,
2) The transmission loss shall be accurately calculated, and the isolation power converter with wide voltage input and sufficient power are available, in addition to considering the lightning-protection isolation, in the case of extramural remote transmission.

3) The power converter must have enough power to ensure its normal operation in the case of excessively long transmission distance and relatively large loss. Considering of the starting current of converter, it is generally recommended that the current provided by power supply shall be 1.3-1.6 times of the starting current of converter.
4) Connect a large capacitor to the pins of the power converter (higher capacitance is suggested) to improve the starting performance.

Step 2: Operating environment

All the power conversion products will have a certain power consumption convert into their own heat energy which make them emit heat and affects the ambient environment by temperature rise, resulting in data interference (thermo-sensitive sensing devices) and device performance reduction, and even causes short circuit and fire. Therefore, there must be sufficient air flow space, or increasing heat radiating area in the layout to reduce the temperature rise to ensure the safety.

As the switching power supply uses switch technology, thus, its switch oscillating circuit and internal magnetic element will produce electromagnetic interference to surrounding devices in conduction and radiation mode. Electromagnetic interference (EMI) is the pollution to environment caused by electromagnetic energies transmitted by electromagnetic radiation and conducted by signal wires and power wires. The electromagnetic interference can't be completely eliminated, but certain methods can be adopted to reduce it to safe level in order to comply with electromagnetic compatibility.

Step 3: Circuit interference


Unreasonable ground connection and power supply layouts always cause instability, high noise and other bad phenomena of system. In many applications, the digital circuit and analog circuit share the same power supply; in this kind of design, it is very important that the analog circuit and digital circuit are used

separately or the power supply and ground loop are completely isolated, in order to avoid the interferences with sensitive analog circuit caused by digital DC level changes and logical transient processes. At the same time in high speed or dynamic analog circuit and digital circuit, when the power is distributed to the loads through relatively long line, the distributed resistance and inductance of power distribution wire will become obvious and easy to cause noise spikes due to rapid changes of load. In this case, the loads need to be decoupled and the resonances caused by series impedances and distribution parameters on the line shall be eliminated.


2. Additional converter applications

1) DC/DC converters used in series

Isolated DC/DC converters allow the connections of their outputs in series to create higher voltages if necessary. Please refer to below figure for proper series connection.

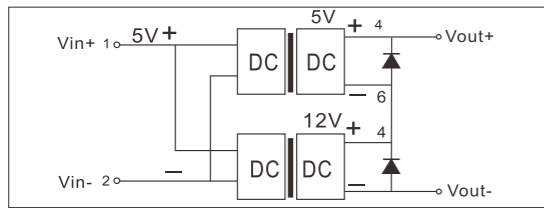

Converter 1 is 5Vout, and Converter 2 is 12Vout. As you can see a unconventional 17VDC voltage can be created by applying the 5V and 12V converters in series. Be careful not to exceed the rated current either of the converters, normally the ripple voltages of two modules will not be synchronized while operation in series results in additional ripples and higher noise. More filtering measures shall be taken in application. In the figure the output of each module is connected to a back biased diode in parallel (generally Schottky diode with voltage drop down to approximately 0.3V is used as excessive voltage drop may cause damage to the products) to prevent reverse voltage being applied to the other. We can get high output voltage through the dual output products, the following figure shows 10V output.

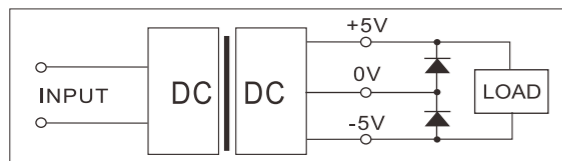


2) DC/DC converters connected in parallel

Redundant design can improve the system reliability. Most of the time, engineers connect several same converters in parallel. And if one of the converters fails, the others could operate instead. However, connecting the converters in parallel to improve the efficiency is not advisable, because the output voltage of two converters can

not be exactly equal, and the converter with higher output voltage tend to provide all load current. In addition, suppose the output voltage of the two converters is set to the same value, the different output impedance, temperature drift and time drift would cause the unbalance of load current and lead to the damage of one of the converters resulted form over load.

Redundant design:


1) high voltage, low current output converter

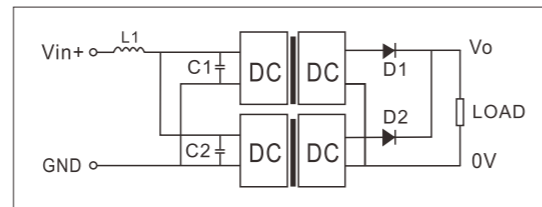

Low voltage drop Schottky diode can avoid that one of the converters starts ahead and cause inverse voltage to other convert. At the same time, the withstand voltage of the diode should be higher than the output voltage. This solution will cause extra ripple and noise, thus it needs to connect an external capacitor or filter circuit to reduce the ripple and noise.


When multiple converters are connected to a same input end and the output is connected to different load, the converters might produce a reflect ripple to the input end and lead to an exception of preceding stage power supply. Therefore, it is necessary to connect a π -type filter formed by common mode choke to avoid the ripple. The parameters can be selected based on the customer's system (usually about 0.3mH).

2) Low voltage, large current output converter

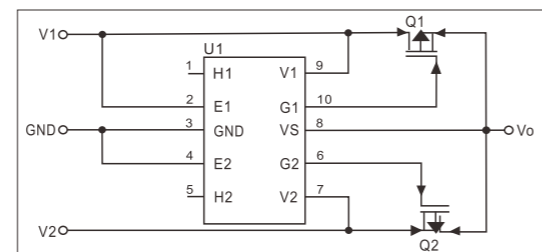

As the redundant design of diode produces high power consumption, it is not applicable for low voltage and large current situation. Therefore, we may use high power MOSFET and chip as the alternative solution. The MOSFET lowers the voltage drop and reduces the device loss at large current, which ensures that the converter operates effectively.

3) Single \pm output, parallel converter

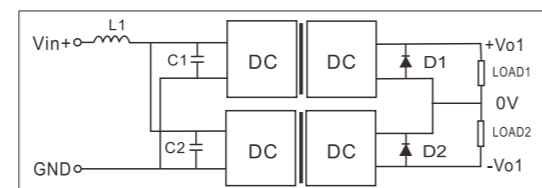


In applications, if the load difference between the primary output and secondary output is significant, the voltage accuracy will be out of limits and leads to application anomaly. Selecting two converters according to the actual load is advisable (please refer to the diagram). If multiple converters share the same power supply, it is recommended to connect a LC filter circuit at each input of the converters in order to avoid the reflect ripple.

3) Reverse voltage protection


The diagram shows the reverse voltage protection circuit. When connecting a negative voltage power supply (e.g. -48VDC communication power supply), the "0V" is connected to the "Vin+" of the converter; the "-48V" is connected to "GND".

Positive input ensures the normal operation of the converter. In order to avoid the converter damage from mis-connecting the input voltage, it is recommended to apply reverse voltage protection. Simply, connecting a positive-going diode at the input terminal. If the voltage is reversely connected, the diode will not be conducted and protect the converter. The lower voltage drop of diode ensures fewer effects to the application efficiency. In addition, the backward voltage of diode can tolerate must be higher (twice recommended) than power supply voltage.

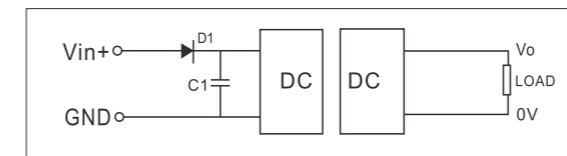

4) Input under voltage protection

When the DC/DC converter is sharing the same power source with other circuits, a large input voltage drop caused by external circuits or over load may lead to an input voltage that is below the minimum input voltage specified by the converter. So it is recommended to adopt under voltage protection circuit to cut off the DC input when the input voltage drops below the minimum specified for the converter.

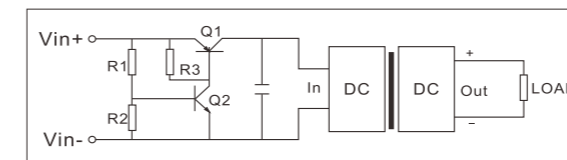

Low voltage turn-off circuit


Where R1,R2 set as low voltage switching limit, PNP transistor can be used, or a p-channel MOSFET. Please contact our sales department.

Note: For low voltage input products, the above circuit will produce a 0.7V voltage drop.

5) Input short circuit protection

Most unregulated DC/DC converters with RCC open loop

circuit have no short-circuit protection. The following circuit is recommended to implement short circuit protection.

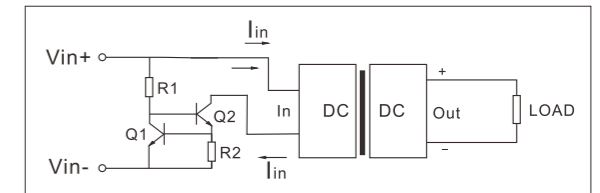

$$R2 = 0.6V / I_{in} \text{ (rated input current)}$$

6) Over current and over voltage protection

The permitted input voltage and input current is restricted to be within the range specified in the datasheet to prevent damage to the DC/DC converter. Here are some techniques to add the additional over voltage protection and over current protection on a standard DC/DC converter. As the figure shown below:

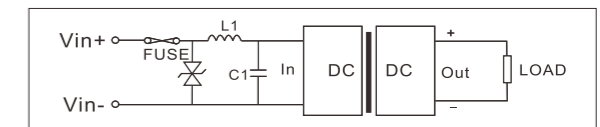


Figure 1: Instant over voltage and over current protection circuit

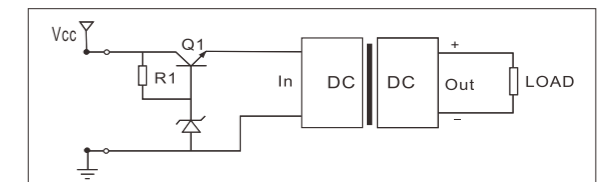


Figure 2: Continuous over voltage protection circuit

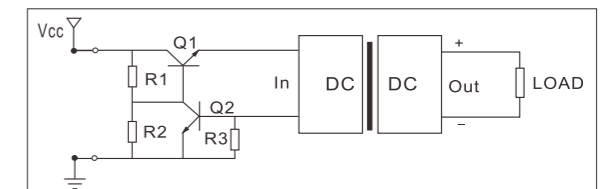


Figure 3: Continuous over current protection circuit


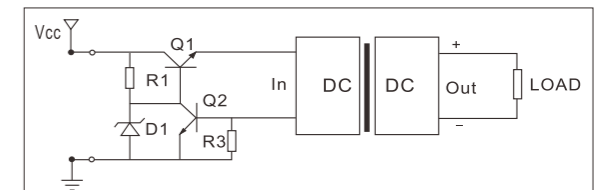


Figure 4: Continuous over voltage and over current protection circuit

7) Input and output filtering circuit

Most MORNSUN converters do not require additional components for filtering. However, if further noise and ripple voltage reduction are required, here are some techniques. Ceramic capacitor has better filtering effects, which is suitable for the application that the frequency is higher than 100KHz.

For the product without over-current protection, it is not recommended to use tantalum capacitor as filtering capacitor. Tantalum capacitor features low ESR and sleep mode, therefore, when the converter starts, the instant large current shock will damage the product. MORNSUN fixed input, unregulated output converters are not suggested to connect tantalum capacitor.

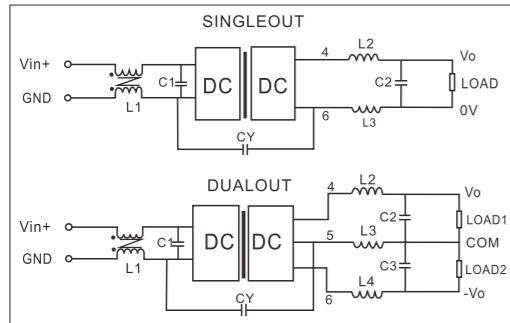

L2/L3/L4, C2/C3: forming the LC filter network to reduce the input ripple (the parameters of the devices are based on the ripple, but they can not exceed the maximum capacitive load)

L1, CY: L1 is the common mode choke to restrain the common mode interferences; Y1 is the 100-1000pF Y capacitor.

For some devices of filter circuit, the frequency selected should be 1/10 of the switching frequency of the converter (refer to the formula).


$$f_c = \frac{1}{2\pi\sqrt{LC}}$$

There are differences in the results because of the application design and load condition, thus the final parameters should be adjusted according to the field application. When selecting the parameters of filtering capacitor, it can not exceed the maximum capacitive load referring to the datasheet. And the maximum capacitive load is for the backend of the whole power supply. It is not just connected at end of the power supply. For example, the regulator chip is powered by the converter and connected to a 10uF capacitor, which is included in the capacitive load.

8) Electromagnetic compatibility

According to IEC 61000-6-X, the input terminal of DC/DC Converter should meet the corresponding EMC requirements when it connects to DC distribution network or supplies power in long distance. Here is a typical application circuit of EMC filter as required for MORNSUN modules. ① is used for EMS protection and ② for EMI filter. More details please refer to datasheet.

And please note that EMC performance relies on not only the modules but also circuit design, PCB layout and structure.

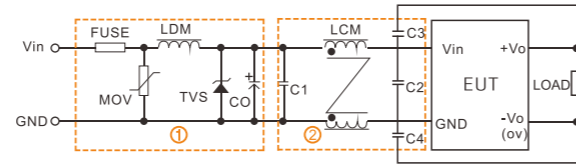


9) Capacitive load

Generally the switching power supply has limit of maximum capacitive load, it is recommended to connect an external electrolytic capacitor at the output end. However, the excess capacitance and low ESR (Equivalent Series Resistance) will cause the operating instability and starting failure of the converter (please refer to the datasheet for the External-connecting Capacitance List). Selecting the capacitor according to field application ensures the best performance and efficiency (tantalum capacitor is not recommended).

10) Output low load and overload protection


① Low load prevention circuit

Most isolated DC/DC converters have minimum load requirement to ensure proper operation and regulation. Typically, this is 10% (non-isolated series can stand continuous unload). The output voltage will increase above stated spec for unregulated. For example, when converter is supplying power to a relay, MOSFET or IC of low power consumption (such as 485), it is recommended to guarantee a 10% load under worst case conditions. As the figure shows:

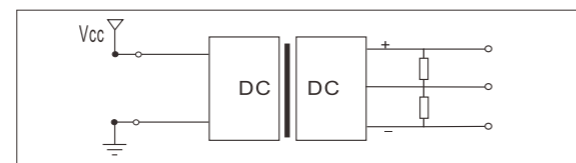


② Overload prevention circuit

Though some current can be limited by a filter, when overload or short circuit conditions occur, a high current may cause damage to DC/DC converters. It is recommended that one installs a slow blow type fuse of rating 3 times max input current on the input as shown. Contact factory for details.

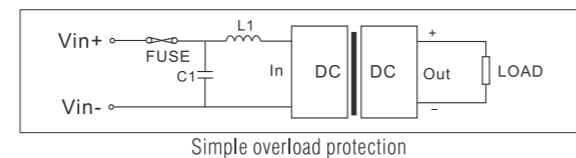

(1) It is recommended to add a fuse to the input terminal, which has the tolerance of 2-3 times of the input current, so as to achieve protection in very short time. Auto-recovery fuse can also be used, but it is relatively slow.

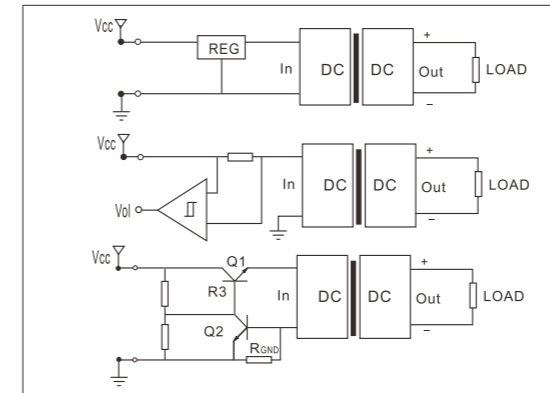

Input over current protection

(2) A circuit breaker can be used.

(3) Overload is avoided by limiting the input current shown as above: A: Utilize a pre-regulator to limit the input current, but the overall efficiency will be reduced.

B: A series resistor network may be placed before the converter to limit current, but in all but a few cases, this is usually impractical.

C: To limit input current by setting $R_{GND} = 0.7V = R_{GND} * I_{LIMIT}$.

③ Remote transmission

When the power source is long-distance transmitted via cable, it will cause more ripple and electromagnetic interferences than PCB circuit. Using isolation modules at the two ends of the cable can eliminate interferences of the MOSFET by common-mode signal. In outdoor environments (high mountain or reservoir), the over voltage caused by lightning will damage the modules and even lead to end devices explosion, therefore, the lightning protections should be higher than level 2. For long-distance transmission, it is best to use high isolation voltage and low current modules to reduce the losses and interferences. At the receiving end, the losses and interferences cause the voltage reduction and instability. Thus, it is recommended to use wide-input modules to ensure the sufficient input power and avoid starting failure.

11) Special function pin explanation

① Output voltage trimming range

With a resistor at the TRIM terminal, the user can adjust the output voltage $\pm 10\%$ around its rated value. The total output power of the converter should be within its maximum specified one.

Figure 1 shows how to connect the external trim resistors. If only to adjust to higher (or lower) voltage, the resistor could be connected only between TRIM terminal and negative output (or positive output). The general rules are, to increase output voltage, adding resistor between TRIM terminal and negative output is all that is needed; to decrease output voltage, then adding resistor between TRIM terminal and positive output is all that is needed. If TRIM is not needed, just leave it open circuit.


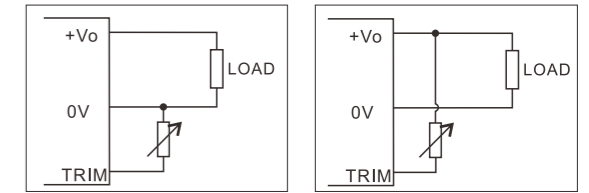


Figure 1: How to connect resistors for trimming

② Remote compensation (Sense Pin)

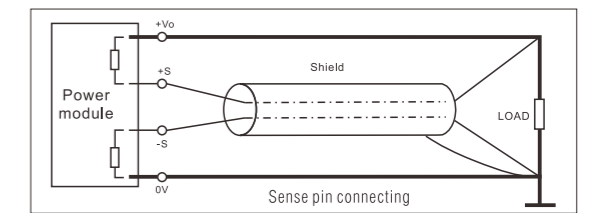

In remote transmission, remote voltage compensation can raise the input voltage to achieve work load. The +SENSE and -SENSE remote compensation pins transmit the input voltage for the remote load, and customers can use wires for remote connecting according to the applications. However, the long wires will cause large EMI. Therefore, in practical application, it is recommended to shield the wires or use twisted-pair wires for connecting. (As shown in the figure)

③ Remote on/off control

There are two remote control modes:

(1) Positive logic: CTRL terminal is connected to -Vin, output OFF; CTRL terminal is left open and connected to high level, output ON.

(2) Negative logic: CTRL terminal is connected to -Vin, output ON; CTRL terminal is left open, output OFF.




Figure 1: isolated control method





Figure 2: general control method

In some special applications, the isolation control method is necessary.

MORNSUN modules have two control methods: one is the voltage control type and the other is the current control type.

VR series and UR series: The on/off function is realized through a control voltage providing by the CTRL terminal. When the CTRL terminal voltage is lower than 1.2VDC or directly connected to the input ground, the module is in the off state; when the external power or module provide a 2.5-12V voltage to pin (the CTRL terminal is at high level with respect to the input ground), the module works normally.

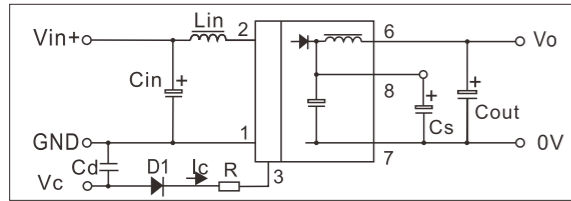

WR series and PW series: when the CTRL pin is left floating or in a high-impedance state, the module works normally. To turn off the module, a control voltage Vc is supplied to the CTRL pin through a resistor R (the CTRL pin is at a high level with respect to the input ground) is required, and the input current to the CTRL pin is suggested to be 5-10mA to turn off the MOS


Resistance calculation formula: $R = \frac{V_c - V_d - 1.0}{I_c} - 300$

Please note that the CTRL pin can't be short connected to the input ground or connected to the low level, otherwise, the input (MOS transistor) would be short-circuited or even damaged.

The module can be turn on or off by changing the voltage of the CTRL pin according to the requirements and the technical manual providing by the power supply manufacturer. If there is no need to use the on/off function, the CTRL terminal can be left floating. In addition, it is recommended to have the interference protection (away from the interference source), otherwise misoperation could be triggered and the module may failed.

12. Photovoltaic power supply application

The PV series is a DC/DC power supply, which is mainly used in the high input voltage applications, such as photovoltaic power generation, high voltage frequency conversion, SVG, etc. It is recommended to add a necessary protection circuit if use in the harsh environments. The following figure is a typical protection circuit, which meets the conducted emission CISPR32 /EN55032 CLASS A, radiated emission CISPR22/EN55022 CLASS A, electronic fast transient IEC/EN61000-4-4 ±4KV, and surge immunity IEC/EN61000-4-5 ±2KV. Please note that the fuse in the input should be considered of its power and withstand voltage in order to meet the safety requirements basic on the application.

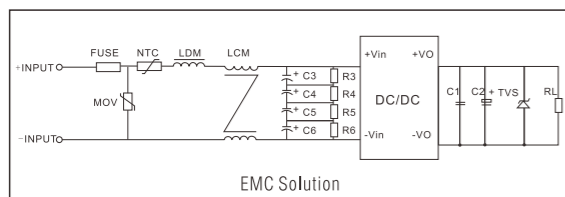

13. High power brick power supply application note

- (1) It is necessary to connect a electrolytic capacitor Cin (C=220μF) to suppress the possible surge when testing and using the module).
- (2) Connecting a large transient circuit such as a motor drive circuit in parallel at the input of the module may pull down the input voltage. In order to prevent that and keep the module away from constant reboot which caused by UVP, increasing the value of the input electrolytic capacitor is recommended.
- (3) It is recommended to connect a TVS and increase the Cout within the capacitive load specification to decrease the voltage spike when the load is inductive such as relay, motor etc. For more details, please refer to the datasheet.

3. Common questions

In special applications, isolated control method is required. Please refer to fig. 1.

1) Can the module support hot plug?

Generally speaking, "hot plug" is to plug the power supply module into or out of the system directly without switching off the power source.

Hot plug is not allowed when the module is in operation. As a huge current and voltage spike will be generated at the moment of hot plug, and it may be dozens of times of the input voltage and current of module, which may damage the module in severe conditions.

2) Can the module be applied at no-load and light-load conditions?

The converters can be applied at no-load or light-load conditions, but the conversion efficiency would be relatively lower. When the product operates at no-load, the loop is unstable. Thus, oscillations may occur and some parameters may not meet the values in datasheet. To ensure reliability, applications at no-load or light-load conditions shall be avoided. The minimum operating output current of the module shall be no less than 10% of rated current (minimum 5% load for products suffixed with R2). It is recommended that the module shall be applied at 30-80% load conditions or the module with smaller power shall be selected and applied.

3) Possible causes for poor starting of module

Cause 1: in the actual application, if the capacitive load exceeds the maximum capacitive load in datasheet and the input capacitance is too large, a very large starting current will be required at start-up time and may cause start up failure; it is recommended to reduce the capacitance

connected to output terminal or provide a buffer circuit at output terminal to improve the module's capability of carrying the capacitive load.

Cause 2: as limited by the maximum starting current of intrinsic safety power supply, the maximum power provided by power supply cannot meet the starting power requirement of module (relatively large starting power is required). It is recommended to select the module with small starting current or connect a small resistance or induction in series at input terminal of converter to reduce the starting current.

Cause 3: the winding of inductive load (generally the motor winding) fails to form induced electromotive force at the moment of starting, and only the internal resistance of winding is operating in the whole circuit. As the internal resistance of winding is very small (generally m ~ level), the current generated at start-up time will be very large and exceed the over-current protection limit of module, causing protection phenomenon and start up failure. As for the module with small power, it is recommended to connect a small resistance in series at the output terminal or select a power converter with larger power.

4) Will the input terminal and output terminal of module be affected when a tantalum capacitor is connected?

In the application of module, it is recommended to use ceramic capacitor or electrolytic capacitor at input and output terminal for the filtering circuit, rather than tantalum capacitor. On one hand, tantalum capacitor with poor surge protection is quite likely to breakdown and cause short circuit due to relatively large instantaneous current or a very high surge voltage generated at start-up time. On the other hand, the withstanding voltage of tantalum capacitor will be reduced in high temperature environment.

1. The Function of signal conditioning module

1.1 Eliminate the interference from the multi-point grounding design

Lots of automated instruments, control units and actuators are applied for monitoring and control in the industrial production process. Due to the potential difference between the potential references of each instruments which caused by multiple-point grounding design, signal distortion happens in the transmission process. With the isolated signal conditioning module, the signal distortion caused by grounding loop would be effectively avoided.

1.2 Isolation and anti-interference

Low-voltage devices are frequently used to measure and control high-voltage, high-current analog applications. If there is no electrical isolation between analog and digital circuits, the energy in the high power circuits may destroy the system and cause a safety incident. The signal conditioning modules isolate the field ends and the monitoring center, improve the CMRR of the high common-mode voltage system to keep the system from being damaged by the lightning surge and ensure the human safety.

1.3 Signal Conversion & Long Distance Transmission

In the PLC & DCS system, various signals collected by the sensors in the field ends need to be converted into industrial standard signals for transmission. Normally, the signal transmission capability of the sensor is very weak, which requests signal conversion such as converting the voltage signal into a current signal to improve the signal anti-interference ability. And the long-distance transmission ability and facilitates interface compatibility are improved. On the other hand, it is convenient to use the signal conditioning module to convert and transfer the signal between the monitoring center and the actuators for improving the stability of the signal transmission.

1.4 Achieve differential signal input and improve load capacity

As the differential signal is highly immune to external EMI, it has stronger anti-interference ability in the long-distance transmission. In addition to differential signal, the signal conditioning module can also receives the common mode signal and isolates it to a differential signal for transmission to improve the load capacity. Moreover, the signal conditioning module can be applied for signal interface matching, signal distribution and isolation purpose.

2. Introduction of the signal conditioning module

The signal conditioning module is also called an isolation transmitter. It is a module that converts analog signals such as dc voltage signal, current signal and resistance signal into different isolated signal type. Linearity, accuracy, bandwidth, isolation withstand voltage and signal distortion are very important in this process. Engineers can choose a proper part according to the application. Designed with the unique magneto electric isolation technology, our signal conditioning module has small signal distortion, and factory default(zero and full scale) calibration have been set. Unlike optocoupler isolation which causes light decay during long-term use that can lead to poor linearity and zero drift, our signal conditioning module does not have this problem and it is stable, safe and reliable.

2.1 Active High Precision TxxxxP Series

The TxxxxP series adopts four-isolation technology. The input signal port, output signal port, input power port and output power port are all isolated. The basic principle block diagram is as below:

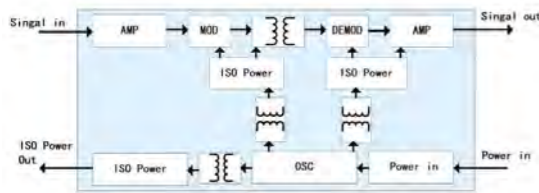


Fig 1. TxxxxP series

TxxxxP series signal conditioning module provides different solutions according to the type of input signal such as voltage/current signal and mV voltage signal.

Table 1. List of TxxxxP Series

Model	Input Signal	Output Signal	ISO Power
TxxxxP	0~20mA, 0~10V	0~20mA, 0~10V	Support
TxxxxAP	±10V	4~20mA, 0~10V	Support
TxxxxCP	±10V	±20mA, ±10V	Support
TMxxxxP	0~100mV	0~20mA, 0~10V	N/A
TMxxxxAP	±100mV	4~20mA, 0~10V	N/A
TMxxxxCP	±200mV	±10V	N/A

2.2 Active high precision TExxxxN series

The TExxxxN series uses two-isolation technology, also known as detective signal conditioning module. The output signal port and the input power port share the same ground, and the input signal share the same ground with the output power port. The external zero and full-scale adjustment pins are available to meet the special demand of customers. The basic principle block diagram is as below:

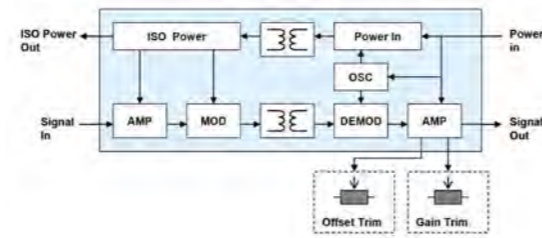


Fig 2. TExxxxN Series

TExxxxN series signal conditioning module provide different solutions according to the type of input signal such as voltage/current signal and mV voltage signal.

Table 2. List of TExxxxN Series

Model	Input Signal	Output Signal	ISO Power
TExxxxN	4~20mA, 0~10V	0~10V	Support
TExxxxAN	±10V	0~10V	N/A
TExxxxCN	±10V	±10V	N/A
TEMxxxxAN	±100mV	0~5V	N/A
TEMxxxxCN	±200mV	±10V	N/A

2.3 Active high precision TFxxxxN series

The TFxxxxN series uses two-isolation technology, also known as output signal conditioning module. The output signal is common grounded with the power output port, and the input signal is common grounded with the power input port. The external zero and full-scale adjustment pins is as below:

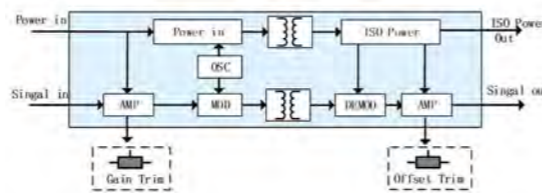


Fig 3. TF Series

TFxxxxN series signal conditioning module provides a variety of solutions as below according to different types of input signals and output signals:

Table 3. List of TExxxxN Series

Model	Input Signal	Output Signal	ISO Power
TFxxxxN	0~10V	0~20mA, 0~10V	Support
TFxxxxGN	0~5V	±10V	N/A
TFWxxxxN	PWM(0~100)	0~20mA, 0~10V	N/A

2.4 Passive high precision signal conditioning module series

The T1100L series adopts a unique electromagnetic isolation technology, which can transmit the 4~20mA signal of the two-wire equipment to the secondary equipment for detection.

With the loop power technology, the module gets power from the Input loop or output loop to support the pre-stage two-wire equipment. Receiving 0/4~20mA current signal from the two-wire equipment and transmit to the back-end detection equipment. The basic principle block diagram is as below:




Fig 4. Passive Series

The passive signal conditioning module provides a variety of solutions as below, according to whether it supports loop power mode or not.

Table 4. List of Passive Series

Model	Input Signal	Output Signal	Loop-powered
T1100L	4~20mA	4~20mA	Support
T1100L-F	4~20mA	4~20mA	N/A

2.5 Two-wire instrument isolated interface TxxxL series

The two-wire instrument interface isolation module uses high-efficiency loop power technology to power the sensors in the field, and convert the voltage signal or PWM signal transmitted from the sensors into a standard current signal output which is applicable to Hart protocol. The module solves the problem of power supply and signal conversion of the intelligent two-wire instruments in field. The basic principle block diagram is as follows:

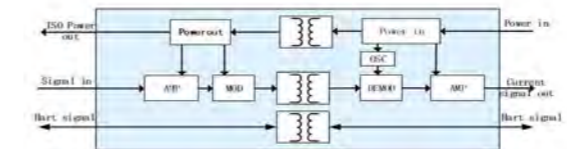


Fig 5. Txxx(H) L Series

Table 5. List of Txxx(H) L

Model	Input Signal	Output Signal	Hart Protocol
TxxxL	0~2.5V	3.7~22mA	N/A
TxxxHL	0~2.5V	3.7~22mA	Support
TWxxxHL	PWM (0~100%)	4~20mA	Support

3. The typical application of the signal conditioning module

3.1 The typical application of signal acquisition

The signal acquisition & control system includes signal acquisition interface, signal transmission interface, communication interface, power supply interface, and signal processing system. The MCU cannot directly process the

signal from sensors such as pressure, position, speed, temperature, flow, humidity, sound and light, graphic recognition and other signals. Therefore, the conversion of the signal from sensors is a must to the MCU. Our signal conditioning module not only provides a complete signal acquisition and signal transmission isolation solution, but also converts, isolates and transfers the power signal of the field sensor and the execution power signal of the field actuator.

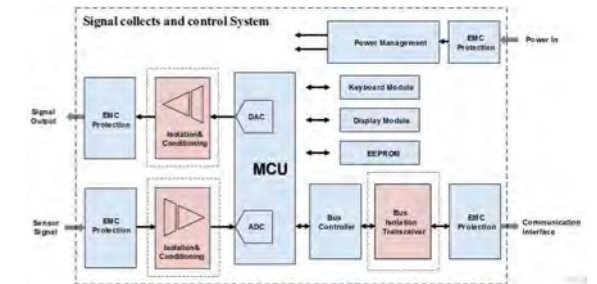


Fig 6. Typical Block Diagram of Signal Acquisition & Control System

3.2 The multi-channel signal acquisition interface circuit

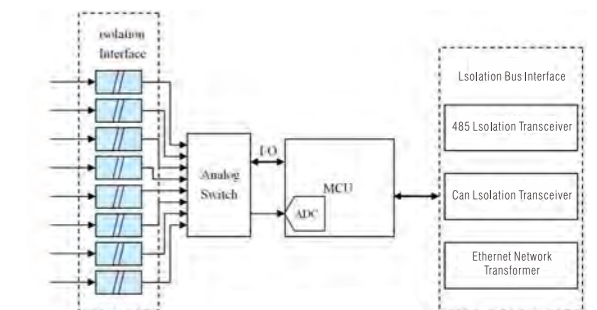


Fig 7. DCS System AI Interface Isolation Application

3.3 The multi-channel transmission interface circuit

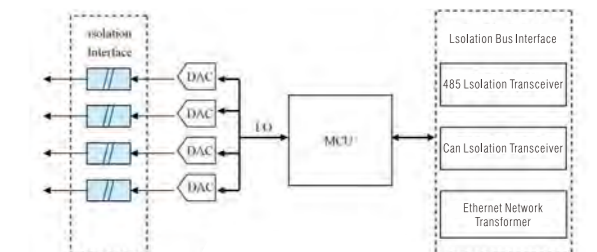


Fig 8. DCS System AO Interface Isolation Application

Signal Conditioning Module Application Notes

3.4 The wiring diagram of two-wire signal acquisition interface circuit

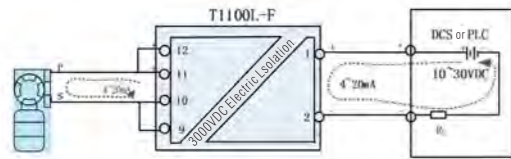


Fig 9. Sample One - the wiring diagram of the Passive Series Conditioning Module

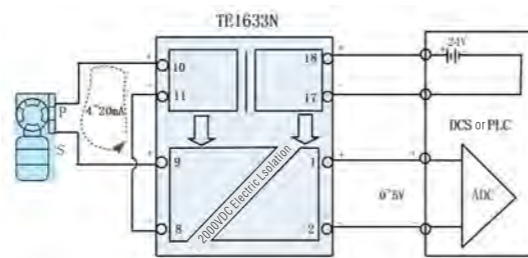


Fig 12. Sample Two - the wiring diagram of the Active Series Conditioning Module

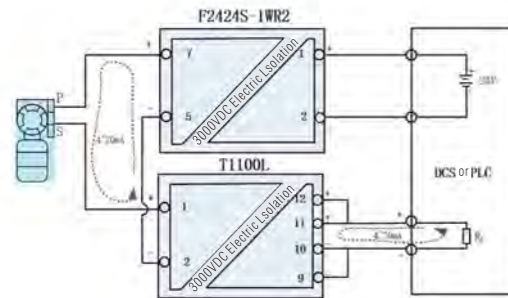


Fig 10. Sample Two - the wiring diagram of the Passive Series Conditioning Module

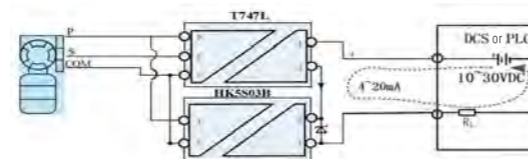


Fig 13. The wiring diagram of the two-wire instrument interface module

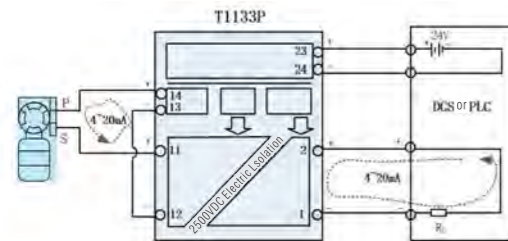


Fig 11. Sample One - the wiring diagram of the Active Series Conditioning Module